



SATHYABAMA

INSTITUTE OF SCIENCE AND TECHNOLOGY

(DEEMED TO BE UNIVERSITY)

Accredited with "A" grade by NAAC | 12B Status by UGC | Approved by AICTE

Jeppiaar Nagar, Rajiv Gandhi Salai, Chennai – 600 119

www.sathyabama.ac.in

SCHOOL OF BUILDING AND ENVIRONMENT


DEPARTMENT OF ARCHITECTURE


VIVA-VOCE EXAMINATION

This is to certify that the practical training SAR 4063 is the work of **KIRUBA SHANKARI M** who had undergone training in **ANSARI ARCHITECTS** and has been monitored by the continuous assessment during JUNE 2022 to OCTOBER 2022.


Dr. Devyani Gangopadhyay
DEAN

Submitted for Viva voce Examination held on 13.12.2022


Internal Examiner


External Examiner



SATHYABAMA

**INSTITUTE OF SCIENCE AND TECHNOLOGY
(DEEMED TO BE UNIVERSITY)**

Accredited with "A" grade by NAAC | 12B Status by UGC | Approved by AICTE

Jeppiaar Nagar, Rajiv Gandhi Salai, Chennai – 600 119

www.sathyabama.ac.in

DECLARATION

I, **KIRUBA SHANKARI M**, by declaring that the Training Report from **MAY 27th 2022 to OCTOBER 29th 2022** done by me under the guidance of **Ar. DAMEEM ANSARI** is submitted in partial fulfillment of the requirements for the completion of a practical training session.

DATE : 13.12.2022

PLACE : CHENNAI

M. Kiruba Shankari M

SIGNATURE OF CANDIDATE

ACKNOWLEDGEMENT

I am pleased to acknowledge my sincere thanks to the Board **of Management of SATHYABAMA** for their kind encouragement in doing this practical training and for completing it successfully. I am grateful to them.

I convey my thanks to **Dr. Devyani Gangopadhyay**, Dean, School of Building and Environment and **Ar.Sarath Chandra Kanth**, Design Chair, Department of Architecture for having been a constant source of support and encouragement.

I wish to express my thanks to all Teaching and Non-teaching staff members of the Department who were helpful in many ways for the completion of the project.

I also wish to thank **Ar. DAMEEM ANSARI**, for the experience of interning at their firm.

CONFORMATION LETTER

I was confirmed as an intern in their firm via call

» JOINING LETTER

ANSARI ARCHITECTS™

31st May 2022
Chennai.

To whomsoever it may concern,
Sathyabama Institute of Science and Technology,
Chennai

Dear Sir/Madam,

Subject – Joining letter for internship training of **KIRUBA SHANKARI. M**
(Reg.No : 39210041)

We wish to confirm that **KIRUBA SHANKARI. M** studying in your institution, has been selected for internship training for 7th semester. She has joined our office on 27-05-2022.

Yours Sincerely,



M.Dameem Ansari M.Arch., AIA.,
Chief Architect,
Ansari Architects

M. Dameem Ansari, M. Arch, AIA,
No: 21/7a, Habibullah Rd, T. Nagar, Chennai - 600 017
Registered Architect in Council Of Architecture,
Regn No: CA/93/16178
Chennai Corporation Registered Architect
Grade - I (RA), Regn No. RA100942019
CMDA Registered Architect Gr.I (RA),
Regn No. RA/Gr.I/ 19/08/328



SATHYABAMA

INSTITUTE OF SCIENCE AND TECHNOLOGY
(DEEMED TO BE UNIVERSITY)

Accredited "A" Grade by NAAC | 12B Status by UGC | Approved by AICTE

www.sathyabama.ac.in

DEPARTMENT OF ARCHITECTURE

PROFESSIONAL PRACTICAL TRAINING REPORT 2022

(Continuous progress report of the trainee architect for the period of One month in the office to submitted to HOD by the Trainee in Charge of the Organization)

1. Name of the office / organization : **ANSARI ARCHITECTS**
2. Address & Contact Number : **No: 21/7A, Habibullah Rd, T. Nagar, Ch - 17
Ph: 044 - 2834 2879, 2834 3402**
3. Name of the student : **KIRUBA SHANKARI M**
4. Duration : From **21.05.2022** To **08.07.2022**
5. Total No. of days : **37**

6. Evaluation of Performance criteria shall be on

* Note: Kindly grade the student as per his/her overall performance in the office during the assessment month which will be converted to the allotted 90 marks by the department.

Description of works	Excellent	Good	Fair	Poor	NA
Understanding of office culture		/			
Participation in the office	/				
Reading of drawings		/			
Presentation Techniques	/				
Model making works		/			
Understanding of construction details		/			
Drafting Skills (Manual / Computer)		/			
Site Supervision / Discussion with clients		/			
Adherence to Time schedule	/				
Other computer skills		/			
File and Office Maintenance	/				
Coordination with other consultants	/				
Overall Grading*	A				

(A - 9.0, B - 8.0, C - 7.0, D - 6.0, E - 5.0)

7. Any other Remarks :

8. Signature of the:
Head of the Office
/ Organization
(With Seal)

M. Dameem Ansari, M. Arch, AIA,
No: 21/7A, Habibullah Rd, T. Nagar, Chennai - 600 017
Registered Architect in Council Of Architecture,
Regn No: CA/93/16176
Chennai Corporation Registered Architect
Grade - I (RA), Regn No. RA100942019
CMDA Registered Architect Gr.I (RA),
Regn No. RA/Gr.I/ 19/08/328



SATHYABAMA

INSTITUTE OF SCIENCE AND TECHNOLOGY
(DEEMED TO BE UNIVERSITY)

Accredited "A" Grade by NAAC | 12B Status by UGC | Approved by AICTE

www.sathyabama.ac.in

DEPARTMENT OF ARCHITECTURE

PROFESSIONAL PRACTICAL TRAINING REPORT 2022

(Continuous progress report of the trainee architect for the period of One month in the office to submitted to HOD by the Trainee in Charge of the Organization)

1. Name of the office / organization : **ANSARI ARCHITECTS**
2. Address & Contact Number : **No. 21/7A, Habibullah Rd, T. Nagar, Ch - 17
Ph: 044 - 2834 2879, 2834 3402**
3. Name of the student : **KIRUBA SHANKARI M**
4. Duration : From **09.07.2022** To **08.08.2022**
5. Total No. of days : **26**

6. Evaluation of Performance criteria shall be on

* Note: Kindly grade the student as per his/her overall performance in the office during the assessment month which will be converted to the allotted 90 marks by the department.

Description of works	Excellent	Good	Fair	Poor	NA
Understanding of office culture		/			
Participation in the office		/			
Reading of drawings		/			
Presentation Techniques		/			
Model making works		/			
Understanding of construction details		/			
Drafting Skills (Manual / Computer)		/			
Site Supervision / Discussion with clients		/			
Adherence to Time schedule	/				
Other computer skills		/			
File and Office Maintenance	/				
Coordination with other consultants	/				
Overall Grading*	A				

(A - 9.0, B - 8.0, C - 7.0, D - 6.0, E - 5.0)

7. Any other Remarks :

8. Signature of the:
Head of the Office
/ Organization
(With Seal)



PROFESSIONAL PRACTICAL TRAINING REPORT 2022

(Continuous progress report of the trainee architect for the period of One month in the office to submitted to HOD by the Trainee in Charge of the Organization)

1. Name of the office / organization : ANSARI ARCHITECTS
2. Address & Contact Number : No. 21/7A, Habibullah Rd, T. Nagar, Ch-17
Ph: 044-28342879, 28343402
3. Name of the student : KIRUBA SHANKARI M
4. Duration : From 09.08.2022 To 19.09.2022
5. Total No. of days : 33

6. Evaluation of Performance criteria shall be on

* Note: Kindly grade the student as per his/her overall performance in the office during the assessment month which will be converted to the allotted 90 marks by the department.

Description of works	Excellent	Good	Fair	Poor	NA
Understanding of office culture	/				
Participation in the office	/				
Reading of drawings		/			
Presentation Techniques	/				
Model making works	/				
Understanding of construction details		/			
Drafting Skills (Manual / Computer)	/				
Site Supervision / Discussion with clients		/			
Adherence to Time schedule	/				
Other computer skills		/			
File and Office Maintenance	/				
Coordination with other consultants		/			
Overall Grading*	<u>A</u>				

(A-9.0, B-8.0, C-7.0, D-6.0, E-5.0)

7. Any other Remarks : _____

8. Signature of the:
Head of the Office
/ Organization
(With Seal)

Jeff


PROFESSIONAL PRACTICAL TRAINING REPORT 2022

(Continuous progress report of the trainee architect for the period of One month in the office to submitted to HOD by the Trainee in Charge of the Organization)

1. Name of the office / organization : ANSARI ARCHITECTS
2. Address & Contact Number : No. 21/7A, Habibullah Rd, T. Nagar, Ch-17
Ph: 044-28342879, 28343402
3. Name of the student : KIRUBA SHANKARI M
4. Duration : From 20.09.2022 To 29.10.2022
5. Total No. of days : 34

6. Evaluation of Performance criteria shall be on

* Note: Kindly grade the student as per his/her overall performance in the office during the assessment month which will be converted to the allotted 90 marks by the department.

Description of works	Excellent	Good	Fair	Poor	NA
Understanding of office culture	/				
Participation in the office	/				
Reading of drawings	/				
Presentation Techniques	/				
Model making works	/				
Understanding of construction details	/				
Drafting Skills (Manual / Computer)	/				
Site Supervision / Discussion with clients	/				
Adherence to Time schedule	/				
Other computer skills	/				
File and Office Maintenance	/				
Coordination with other consultants	/				
Overall Grading*	<u>A</u>				

(A-9.0, B-8.0, C-7.0, D-6.0, E-5.0)

7. Any other Remarks : Hard working, Punctual

8. Signature of the:
Head of the Office
/ Organization
(With Seal)

Jeff


WORK DIARY

DATE	DAY	DAY	PROJECT NAME	WORKS
MAY				
27 05 2022	Day 1	Fri	Swapna Pratap Uthandi	Ground Floor Planning - Scheme Layout (Zoning)
28 05 2022	Day 2	Sat	Shahul Edalakudi	Started with Placement of Doors, Furniture
			Shahul Edalakudi	Placement of Doors, Furniture Corrections
			Automation	
			Lakshmipathy Site Visit	
29 05 2022	SUNDAY			
30 05 2022	Day 3	Mon	Shahul Edalakudi	Complete Corrections of all Floor Plans, Placement of Doors, Furniture and compited with Hatching, Area Calculation and Sheet Layout
31 05 2022	Day 4	Tue	Anandhakumar Saidapet	First Floor Planning
			Abhinayaa Kottivakkam	Worked on Terrace Plan, marked Roof lines, Sunshades and Calculation of Area
JUNE				
1 06 2022	Day 5	Wed	Anandhakumar Saidapet	Completion of All Floor Plans with Placement of Doors, Furniture and Area Calculation
2 06 2022	Day 6	Thu	Anandhakumar Saidapet	Completion of All Floor Plans with Placement of Doors, Furniture and Area Calculation
3 06 2022	Day 7	Fri	Anandhakumar Saidapet	Completion of All Floor Plans and mailed
			Ganesh Kundrathur	Started with Corrections in Plan and Furniture Placement after discussion with Client
4 06 2022	Day 8	Sat	Ganesh Kundrathur	Option 11 Floor Plans completed and mailed
5 06 2022	SUNDAY			
6 06 2022	Day 9	Mon	Loganathan Avadi	Corrections in Option 1 Scheme Plan (for Site 1) , Started with new scheme plan, Option 3 (for Site 2)
7 06 2022	Day 10	Tue	Loganathan Avadi	Completed Corrections in Option 1 Scheme Plan (for Site 1) and new scheme plan, Option 3 (for Site 2) and mailed
8 06 2022	Day 11	Wed	Thanigaivel Cuddalore	Exterior 3D Model Corrections in Basic Model, Started Option 2 Exterior detailing
9 06 2022	Day 12	Thu	Thanigaivel Cuddalore	Option 2 Exterior 3D Modelling
10 06 2022	Day 13	Fri	Thanigaivel Cuddalore	Option 2 Exterior 3D Modelling
11 06 2022	Day 14	Sat	Thanigaivel Cuddalore	Option 2 Exterior 3D Modelling
12 06 2022	SUNDAY			
13 06 2022	Day 15	Mon	Thanigaivel Cuddalore	Option 2 Exterior 3D Modelling
14 06 2022	Day 16	Tue	Thanigaivel Cuddalore	Option 2 Exterior 3D Modelling
15 06 2022	Day 17	Wed	Thanigaivel Cuddalore	Option 2 Exterior 3D Modelling and Rendering
16 06 2022	Day 18	Thu	Thanigaivel Cuddalore	Option 2 Exterior 3D Modelling Corrections and Rendering
			Anandhakumar Madipakkam	Started Scheme Plan
17 06 2022	Day 19	Fri	Anandhakumar Madipakkam	Scheme Plan
			Sahul Pudupakkam	Started Scheme Plan
18 06 2022	Day 20	Sat	Anandhakumar Madipakkam	Complete Corrections of all Floor Plans, Placement of Doors, Furniture, Area Calculation and Sheet Layout.Option 5 Scheme plans completed and mailed to client
19 06 2022	SUNDAY			

DATE	DAY	DAY	PROJECT NAME	WORKS
20 06 2022	Day 21	Mon	Vijay Rajaa Bangalore	Ground Floor Scheme Plan
			Swapna Pratap Uthandi	Corrections and detailing
21 06 2022	Day 22	Tue	Swapna Pratap Uthandi	All Floor Plans Option 3 and 3A Completed and mailed to client
22 06 2022	Day 23	Wed	Vijay Rajaa Bangalore	New Scheme Plans Started
			Vijay Rajaa Bangalore	Option 5A (GF,FF) Completed and mailed to client
			Anandhakumar Madipakkam	Corrections and detailing
23 06 2022	Day 24	Thu	Anandhakumar Madipakkam	Option 7 all floor plans corrections, completed and mailed to client
			Vijay Rajaa Bangalore	Option 5B GF Plan completed and mailed
			Swapna Pratap Uthandi	Discussion on corrections
24 06 2022	Day 25	Fri	Swapna Pratap Uthandi	Scheme Plan Corrections
25 06 2022	Day 26	Sat	Swapna Pratap Uthandi	Scheme Plans Option 3B completed
			Sahul Pudupakkam	Scheme Plan Corrections
26 06 2022	SUNDAY			
27 06 2022	Day 27	Mon	Vijay Rajaa Bangalore	Scheme Plans
28 06 2022	Day 28	Tue	Swapna Pratap Uthandi	Scheme Plans Corrections and detailing
			Vijay Rajaa Bangalore	Scheme Plans Option 6
29 06 2022	Day 29	Wed	Swapna Pratap Uthandi	All floor scheme plans Option 3C Completed
			Sahul Pudupakkam	Option 3B all floor scheme plans Completed
			Loganathan Avadi	Scheme Plan Corrections
30 06 2022	Day 30	Thu	Loganathan Avadi	Scheme Plan Corrections
JULY				
1 07 2022	Day 31	Fri	Loganathan Avadi	Scheme Plan Option 6, 6A and Option 7,7A
2 07 2022	nil			
3 07 2022	SUNDAY			
4 07 2022	Day 32	Mon	Loganathan Avadi	Option 6,6A and Option 7,7A - corrected, completed and mailed to client
			Nandakumar Virudhunagar	Bedroom 2 3D model started
5 07 2022	Day 33	Tue	Nandakumar Virudhunagar	Bedroom 2 3D model
6 07 2022	Day 34	Wed	Nandakumar Virudhunagar	Bedroom 2 3D model Corrections after discussion
7 07 2022	Day 35	Thu	Nandakumar Virudhunagar	Bedroom 2 3D model
8 07 2022	Day 36	Fri	Nandakumar Virudhunagar	Bedroom 2 3D model
9 07 2022	Day 37	Sat	Nandakumar Virudhunagar	Bedroom 2 3D model
10 07 2022	SUNDAY			

DATE	DAY	DAY	PROJECT NAME	WORKS
11 07 2022	Day 38	Mon	Nandakumar Virudhunagar	Bedroom 2 3D model completed, rendered and mailed to client
			Dhanakotti Pallavaram	Started with New Scheme plans according to client brief
12 07 2022	Day 39	Tue	Dhanakotti Pallavaram	Scheme plans
13 07 2022	Day 40	Wed	Dhanakotti Pallavaram	Scheme plans
			Loganathan Avadi	Scheme plan Corrections
14 07 2022	Day 41	Thu	Loganathan Avadi	Scheme plans Options 8,9 and 10 completed and mailed to client
15 07 2022	Day 42	Fri	Dhanakotti Pallavaram	Scheme plans
16 07 2022	Day 43	Sat	Dhanakotti Pallavaram	Scheme plans
17 07 2022	SUNDAY			
18 07 2022	Day 44	Mon	Dhanakotti Pallavaram	Scheme plan Corrections and discussion
19 07 2022	Day 45	Tue	Dhanakotti Pallavaram	Scheme plans
20 07 2022	Day 46	Wed	Dhanakotti Pallavaram	Scheme plans Option 1 and 2
21 07 2022	Day 47	Thu	Dhanakotti Pallavaram	Scheme plans Option 1 & 2 for all floors and Option 2A & 2B for SF Completed
22 07 2022	Day 48	Fri	Dhanakotti Pallavaram	Scheme plans Option 1, 2 & 2A all floor plans completed and mailed to client
23 07 2022	Day 49	Sat	Sahul Pudupakkam	Started with basic Exterior 3d model
24 07 2022	SUNDAY			
25 07 2022	Day 50	Mon	Sahul Pudupakkam	Basic Exterior 3d model
26 07 2022	Day 51	Tue	Sahul Pudupakkam	Exterior 3d model for elevation design
27 07 2022	Day 52	Wed	Sahul Pudupakkam	Exterior 3d model for elevation design
28 07 2022	Day 53	Thu	Sahul Pudupakkam	Exterior 3d model for elevation design
29 07 2022	Day 54	Fri	Sahul Pudupakkam	Exterior 3d model for elevation design
30 07 2022	Day 55	Sat	Sahul Pudupakkam	Exterior 3d model for elevation design
31 07 2022	SUNDAY			
AUGUST				
1 08 2022	Day 56	Mon	Sahul Pudupakkam	Exterior 3d model for elevation design Option 1 & Option 2 (different color and material combos) completed and rendered
			Nandhakumar Virudhunagar	Kitchen Interior 3d model
2 08 2022	Day 57	Tue	Sahul Pudupakkam	Exterior 3d model Option 2 correction
			Nandhakumar Virudhunagar	Kitchen Interior 3d model
3 08 2022	Day 58	Wed	Nandhakumar Virudhunagar	Kitchen Interior 3d model
			Abhinayaa kottivakkam	Interior Markouts Detail Drawing
4 08 2022	Day 59	Thu	Abhinayaa kottivakkam	Furniture layout for all floors completed and mailed
			Nandhakumar Virudhunagar	Kitchen Interior 3d model
5 08 2022	Day 60	Fri	Loganathan Avadi	Option 12 all floors plans, Option 12A & 12B GF Plans completed and mailed to client
			Anandhakumar Madipakkam	Scheme Plan Corrections
			Nandhakumar Virudhunagar	Kitchen Interior 3d model
6 08 2022	Day 61	Sat	Dhanakotti Pallavaram	Scheme plans Option 7C completed and mailed to client
7 08 2022	SUNDAY			

DATE	DAY	DAY	PROJECT NAME	WORKS
8 08 2022	Day 62	Mon	Sahul Pudupakkam	Exterior 3d model
			Anandhakumar Madipakkam	Scheme Plan Corrections
9 08 2022	Day 63	Tue	Anandhakumar Madipakkam	Scheme Plan Corrections
			Sahul Pudupakkam	Exterior 3d model
10 08 2022	Day 64	Wed	Sahul Pudupakkam	Exterior 3d model
11 08 2022	Day 65	Thu	Sahul Pudupakkam	Exterior 3d model
12 08 2022	Day 66	Fri	Sahul Pudupakkam	Exterior 3d model completed and rendered
13 08 2022	Day 67	Sat	Sahul Pudupakkam	Exterior 3d model
14 08 2022	SUNDAY			
15 08 2022	HOLIDAY			
16 08 2022	Day 68	Mon	Anandhakumar Madipakkam	Scheme plans Option 9A & 9B
			Harun Devakottai	Started with New Scheme plans according to client brief
			Loganathan Avadi	Scheme Plan Corrections
17 08 2022	Day 69	Tue	Loganathan Avadi	Scheme Plans
			Navin Madhanandapuram	Scheme Plan Corrections
			Harun Devakottai	Scheme Plans
18 08 2022	Day 70	Wed	Senthilkumar kundrathur	Scheme plan GF
			Loganathan Avadi	Scheme Plans Option 13
			Navin Madhanandapuram	Scheme Plans Detailing
19 08 2022	ABSENT			
20 08 2022	ABSENT			
21 08 2022	SUNDAY			
22 08 2022	Day 71	Mon	Nandhakumar Virudhunagar	Kitchen Interior 3d model
23 08 2022	Day 72	Tue	Loganathan Avadi	Scheme Plans
24 08 2022	Day 73	Wed	Loganathan Avadi	Scheme Plans Option 14 & Option (14A & 14B GF Plan) Completed and mailed to client
			Vijay Raajaa Bangalore	Scheme plans Option 12A completed and mailed to client
25 08 2022	Day 74	Thu	Nandhakumar Virudhunagar	Kitchen Interior 3d model
26 08 2022	Day 75	Fri	Praveen Manali Vimala Jewellers	Plan, Section & Elevation 2D drawings corrections
27 08 2022	Day 76	Sat	Praveen Manali Vimala Jewellers	Plan, Section & Elevation 2D drawings corrections
			Loganathan Avadi	Scheme Plan Corrections
28 08 2022	SUNDAY			
29 08 2022	Day 77	Mon	Loganathan Avadi	Scheme Plan Corrections
			Vijay Raajaa Bangalore	Option 12B all floor plans completed and mailed to client
30 08 2022	Day 78	Tue	Nandhakumar Virudhunagar	Kitchen Interior 3d model Option 1 & 2 completed and rendered
Loganathan Avadi			Option 15, Option 15A & 15B GF Plan completed and mailed to client	
31 08 2022	Day 79	Wed	Pugazhenthii Iyyappanthangal	Plan corrections with columns,windows,ducts,sump
SEPTEMBER				
01 09 2022	Day 80	Thu	Pugazhenthii Iyyappanthangal	Plan corrections with columns,windows,ducts,sump
			Vijay Raajaa Bangalore	Scheme Plan Corrections
2 09 2022	Day 81	Fri	Vijay Raajaa Bangalore	Option 12C Completed and mailed to client
			Muthukumar Mambakkam	Scheme plans detailing
3 09 2022	Day 82	Sat	Muthukumar Mambakkam	Scheme plans detailing Option 1 & 2 completed and mailed to client
4 09 2022	SUNDAY			

DATE	DAY	DAY	PROJECT NAME	WORKS
5 09 2022	Day 83	Mon	Loganathan Avadi	Option 16,(16A, 16B, 17, 17A GF scheme Plans) completed and mailed to client
			Senthamizh selvan thiruvurur	interior markout drawing
6 09 2022	Day 84	Tue	Senthamizh selvan thiruvurur	furniture layout completed and mailed to client
			Rajasekaran Mehta Nagar	interior markout drawing
7 09 2022	Day 85	Wed	Rajasekaran Mehta Nagar	furniture layout completed and mailed to client
8 09 2022	Day 86	Thu	Melvin Avadi	interior markout drawing
			Sahul Pudupakkam	Option 9,9A plans completed and mailed to client
9 09 2022	Day 87	Fri	Anandhakumar Saidapet	Option 5 Scheme plans completed and mailed to client
			Melvin Avadi	furniture layout
10 09 2022	Day 88	Sat	Melvin Avadi	furniture layout
11 09 2022			SUNDAY	
12 09 2022	Day 89	Mon	Radhakrishnan Sirkali	Column layout,levels,placement of windows and detailing
13 09 2022	Day 90	Tue	Vanshika Madipakkam	Basic Scheme plans Started
14 09 2022	Day 91	Wed	Vanshika Madipakkam	Basic Scheme plans
15 09 2022	Day 92	Thu	Vanshika Madipakkam	Basic Scheme plans
			Loganathan Avadi	Scheme Plan Corrections
16 09 2022	Day 93	Fri	Vanshika Madipakkam	Basic Scheme plans
17 09 2022	Day 94	Sat	Vanshika Madipakkam	Scheme plans detailing
18 09 2022			SUNDAY	
19 09 2022	Day 95	Mon	Vanshika Madipakkam	Scheme plans Option 1,2,3 & 4 detailing completed and mailed to client
20 09 2022	Day 96	Tue	Loganathan Avadi	Option 19 (Option 19A & 15C GF Plans) completed and mailed
			Vanshika Madipakkam	New Scheme plans detailing
21 09 2022	Day 97	Wed	Vanshika Madipakkam	Scheme plans Option 5 & 6 detailing completed and mailed to client
			Muthukumar Mambakkam	Scheme Plan Corrections
22 09 2022	Day 98	Thu	Muthukumar Mambakkam	Scheme Plan Options 11,11A,11B,12,12A completed and mailed to client
			Praveen Manali Vimala Jewellers	2D Exterior Elevations
23 09 2022	Day 99	Fri	Praveen Manali Vimala Jewellers	2D Exterior Elevations
24 09 2022	Day 100	Sat	Praveen Manali Vimala Jewellers	2D Exterior Elevations
25 09 2022			SUNDAY	
26 09 2022	Day 101	Mon	Praveen Manali Vimala Jewellers	2D Exterior Elevations
			Vanshika Madipakkam	Scheme plan corrections
			Muthukumar Mambakkam	New scheme plans
27 09 2022			ABSENT	
28 09 2022	Day 102	Wed	Vanshika Madipakkam	Scheme plans Options 2A,2B completed and mailed to client
29 09 2022	Day 103	Thu	Muthukumar Mambakkam	Scheme plans Options 13 & 14 completed and mailed to client
			Loganathan Avadi	Scheme plans Options 20 (20A, 15D, 15E)
30 09 2022	Day 104	Fri	Praveen Manali Vimala Jewellers	2D Exterior Elevations
			Vanshika Madipakkam	Options 2A,2B completed and mailed to client
			Praveen Manali Vimala Jewellers	Option 1 to 15 completed and mailed to client

DATE	DAY	DAY	PROJECT NAME	WORKS
OCTOBER				
01 10 2022	Day 105	Sat	Loganathan Avadi	Options 20B, (20C, 15E, 15F GF Plan)
			Muthukumar Mambakkam	scheme plan Option 14A completed and mailed to client
02 10 2022			SUNDAY	
03 10 2022	Day 106	Mon	Nandhakumar Virudhunagar	Gym interior 3D model
4 10 2022	Day 107	Tue	Nandhakumar Virudhunagar	Gym interior 3D model
5 10 2022	Day 108	Wed	Nandhakumar Virudhunagar	Gym interior 3D model
6 10 2022	Day 109	Thu	Nandhakumar Virudhunagar	Gym interior 3D model
7 10 2022	Day 110	Fri	Nandhakumar Virudhunagar	Gym interior 3D model Option 1 rendering completed and mailed to client
			Anandhakumar Madipakkam	Exterior 3D model
8 10 2022	Day 111	Sat	Anandhakumar Madipakkam	Exterior 3D model
09 10 2022			SUNDAY	
10 10 2022	Day 112	Mon	Anandhakumar Madipakkam	exterior 3d elevation Option 4 completed, rendered and mailed to client
11 10 2022	Day 113	Tue	Shahul Edalakudi	Scheme plans
12 10 2022	Day 114	Wed	Thanigaivel Cuddalore	furniture layout coordination with Vaishnavi
13 10 2022	Day 115	Thu	Shahul Edalakudi	Scheme plans
			Dr.Bathragiri Kolathur	interior markout drawing
14 10 2022	Day 116	Fri	Shahul Edalakudi	Scheme plans
			Shahul Edalakudi	Scheme plans
15 10 2022	Day 117	Sat	Krishna Kumar Madurai	study room furniture layout, Floor area calculation
			Krishna Kumar Madurai	study room furniture layout, Floor area calculation
16 10 2022			SUNDAY	
17 10 2022	Day 118	Mon	Dr.Bathragiri Kolathur	furniture layout completed and mailed to client
18 10 2022	Day 119	Tue	Shahul Edalakudi	Scheme plans
19 10 2022	Day 120	Wed	Shahul Edalakudi	Scheme plans Option 3, 3A (GF & FF), 3B & 3C (FF) Plans completed and mailed to client
20 10 2022	Day 121	Thu	Ranjith Injambakkam	Scheme plans
21 10 2022	Day 122	Fri	Ranjith Injambakkam	Scheme plans Option 1 & 2 completed and mailed to client
22 10 2022	Day 123	Sat	Nandhakumar Virudhunagar	Elevation for Wall Electricals
23 10 2022			SUNDAY	
24 10 2022	Day 124	Mon	Nandhakumar Virudhunagar	Elevation for Wall Electricals
25 10 2022	Day 125	Tue	Nandhakumar Virudhunagar	Elevation for Wall Electricals
26 10 2022	Day 126	Wed	Nandhakumar Virudhunagar	Elevation for Wall Electricals
27 10 2022	Day 127	Thu	Nandhakumar Virudhunagar	Elevation for Wall Electricals
28 10 2022	Day 128	Fri	Nandhakumar Virudhunagar	Elevation for Wall Electricals
29 10 2022	Day 129	Sat	Nandhakumar Virudhunagar	Elevation for Wall Electricals

Date : 09.11.2022

Experience Certificate

This is to certify that **Kiruba Shankari M** (Reg.no: 39210041)
D/O **N.S.Mohan** has worked with Ansari Architects as an Intern architect
from 27th May 2022 to 29th October 2022. During her tenure with us, her
performance was good.

She is hardworking and can efficiently work in a team.

We wish her the very best in her future endeavors.

Your's Sincerely,



M.Dameem Ansari M.Arch., AIA.,

Founder & C.E.O.

Ansari Architects,

M. Dameem Ansari, M. Arch, AIA,
No: 21/7A, Habibullah Rd, T. Nagar, Chennai - 600 017
Registered Architect in Council Of Architecture,
Regn No: CA/93/16176
Chennai Corporation Registered Architect
Grade - I (RA), Regn No. RA100942019
CMDA Registered Architect Gr.I (RA),
Regn No. RA/Gr.I/ 19/08/328

TABLE OF CONTENTS

About the firm, Vastu and Standards	1	INTERIOR VIEWS.....	26 - 29
SCHEME PLANS.....	2 - 22	1. Mr. Nandhakumar Residence at Virudhunagar(Bedroom).....	26
1. Mr. Loganathan's Residence at Avadi.....	2 - 3	2. Mr. Nandhakumar Residence at Virudhunagar(Kitchen).....	27
2. Mr. Dhanakotti's Residence at Pallavaram.....	4 - 6	3. Site Photos relating to kitchen.....	28
3. Mr. Shahul's Residence at Edalakudi.....	7 - 8	4. Mr. Nandhakumar Residence at Virudhunagar(Gym).....	29
4. Mr. Ranjith's Residence at Injambakkam.....	9	INTERIOR MARKOUT DRAWINGS.....	30 - 37
5. Mr. Vijay Raajaa's Residence at Bangalore.....	10 - 11	1. Mrs. Abhinayaa Residence at Kottivakkam.....	30
6. Mr. Anandhakumar's Residence at Saidapet.....	12 - 13	2. Mr. Melvin Residence at Avadi.....	31 - 32
7. Mrs. Vanshika's Residence at Madipakkam.....	14	3. Mr. Rajasekaran Residence at Mehta Nagar.....	33 - 34
8. Mr. Muthu Kumar's Residence at Mambakkam.....	15	4. Mr. Senthamizh Selvan Residence at Thiruvarur.....	35
9. Mrs. Swapna Pratap's Residence at Uthandi.....	16	5. Mr. Bathragiri Residence At Kolathur.....	36 - 37
10. Mr. Ganesh's Residence at Kundrathur.....	17	EXTERIOR ELEVATION - 2D.....	38-39
11. Mr. Navin's Residence at Madhanandapuram.....	17	1. Vimala Jewellers at Manali.....	38-39
12. Mr. Pugazhenthis's Residence at Iyyappanthangal.....	18	WALL ELECTRICALS - 2D.....	40 - 46
13. Mr. Radhakrishnan's Residence at Sirkali.....	18	1. Mr. Nandhakumar Residence at Virudhunagar	
14. Mr. Sahul's Residence at Pudupakkam.....	21	(2D Elevations for Wall Electricals).....	40 - 46
15. Mr. Anandhakumar's Residence at Madipakkam.....	22	2. Site Photos.....	47
EXTERIOR VIEWS.....	19 - 25		
1. Mr. Sahul's Residence at Pudupakkam.....	19 - 20		
2. Mr. Anandhakumar's Residence at Madipakkam.....	23		
3. Mr. Thanigaivel's Residence at Cuddalore.....	24		
4. Site Photos relating to exterior.....	25		

I
N
T
E
R
N
S
H
I
P
O
R
T
F
O
L
I
O

KIRUBA SHANKARI M

3
9
2
1
0
0
4
1

ABOUT THE FIRM ANSARI ARCHITECTS

Chief Architect and Founder of the Firm : Ar. Dameem Ansari, M.Arch., AIIA

Associations: Council of Architecture Delhi, Indian Institute of Architects

Founded Year : 1996

About Architect :

Passed out with his distinction from School of Architecture and Planning Anna University, Guindy, Chennai in the year 1994. After his early stint with many Architects like CRNarayana Rao, Vivek & Associates, and Subramaniam Architects, he founded Ansari and Associates Architects in the year 1996.

Specialization : High End Residences and Luxury Independent Homes.



Some of the Images rendered of spaces like dressing area, bedroom, common area

VASTU CONSIDERATIONS

- Main door - East / North while going outside
- Kitchen - SE / NW
- Master Bedroom - SW / NE
- Toilet - avoid mostly in corners
- Water Closet - N / S wall facing
- Toilet and Prayer Room no common wall
- God statue/frame - E / W / S
- Staircase - S, W, rare in SW
- N, E & NE to be avoided
- always provide it clockwise
- Cot - Head side to be avoided in North
- Stove - E
- Septic Tank - NW & SE
- Sump - NE
- Overhead Tank - SW corner
- Building Form - NE - Low height
- SW - High height
- Avoid cutouts - NE & SW




- Car Parking - 1 car - 14'0" . 19'0"
2 car - 19'0" . 19'0"
3 car - 27'0" . 19'0"
- Living - 14'6" . 20'0"
min. width - 13'0", min. length - 16'0"
- Bedroom - 13'0" . 16'0"
- Mater Bedroom - 14'0" . 17'6" or 13'0" . 19'0"
- Guest Bedroom - 12'0" . 15'0" or 12'0" . 12'0"
- Toilet - 9'0" . 6'0" / 9'0" . 5'6" / 8'6" . 5'6" / 8'6" . 5'0", ledge wall - min 3'0"
- Dressing - 8'0" . 8'0", table - 1'3" . 3'6", wardrobe - width - 2', length should be 16'0" per bedroom
- Common toilet - 3'6" . 4'6"
- Servant's toilet - 3'6" . 7'0"
- Kitchen - 14'0" . 14'0" or 14'0" . 16'0", island counter is 3'0" . 5'0" min.
- Dining - 13'0" . 16'0" / 13'0" . 19'0"
- Balcony - min. width 4'6"
- Staircase - min. width 3'6"

ROOM DIMENSIONS

- Utility - min. width 5'0"
- Home Theatre - min. 13'0" . 17'0"
- Gym - min. 11'0" . 13'0"
- Laundry - 5'6" . 7'0" / 6'0" . 8'0"
- Gazebo - 8'0" . 8'0", its column size is 6"
- Sitting Window - min. length 6'0" to 6'6", width is 2'0" with wall (9")
- Over Head Tank - dimensions depends on capacity,
height is 5'0", l. b varies with respect to capacity.
- Capacity of OHT must be 8000 liters minimum
- formula [(l.b.h).28.3]
- wardrobe, cabinets, crocery etc., width is 2'0"
- Door dimensions...
- Main door width is 4'0", 3'6" and its offset from wall should be 4.5"
- Doors to bedroom, home theatre, kichen etc., width is 3'3", 3' and its offset from wall should be 4.5"
- Doors to toilets, utility etc., is 2'9", 2'6" and its offset from wall should be 3"

- These were some of the basic considerations of Vastu and room dimensions which was metioned to me before stepping into the scheme planning team and was said to follow these as the base scratch.

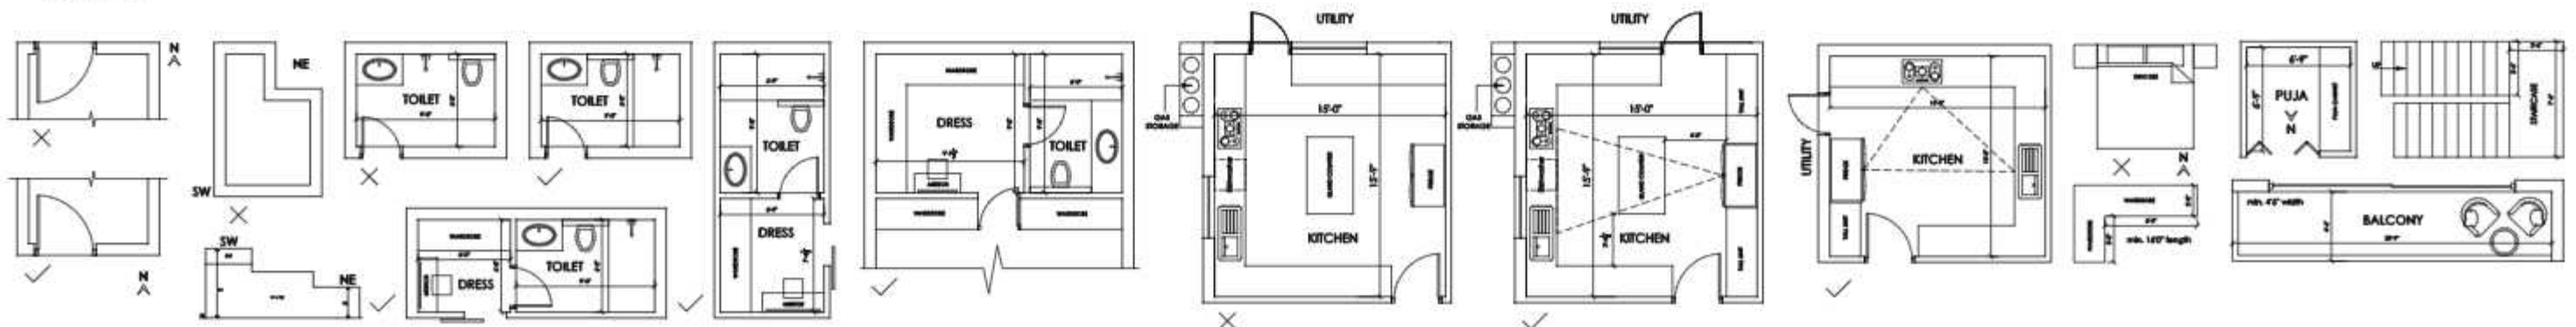

Mr. LOGANATHAN AT AVADI - CLIENT BRIEF

Plot Area 2798 Sq. ft
GROUND FLOOR


- 2 Car Parking
- Verandah
- Living
- Dining
- Kitchen
- Utility
- Bedroom with attached toilet
- Pooja room
- Common toilet
- Driver's toilet


FIRST FLOOR

- Family
- Office
- 2 Bedrooms
- With Walk in Wardrobe
- Attached Toilet
- Skylight needed in toilet


TERRACE FLOOR

- Lift mandatory
- Terrace Garden
- Sit outs
- Laundry for washing, cleaning etc.,
- Due to certain aspects client went for buying the 2nd site out of two and plans were worked out for the same.
- Lots of options were provided in case of zoning, spaces, volumes, furniture, accessibility, parking etc.,





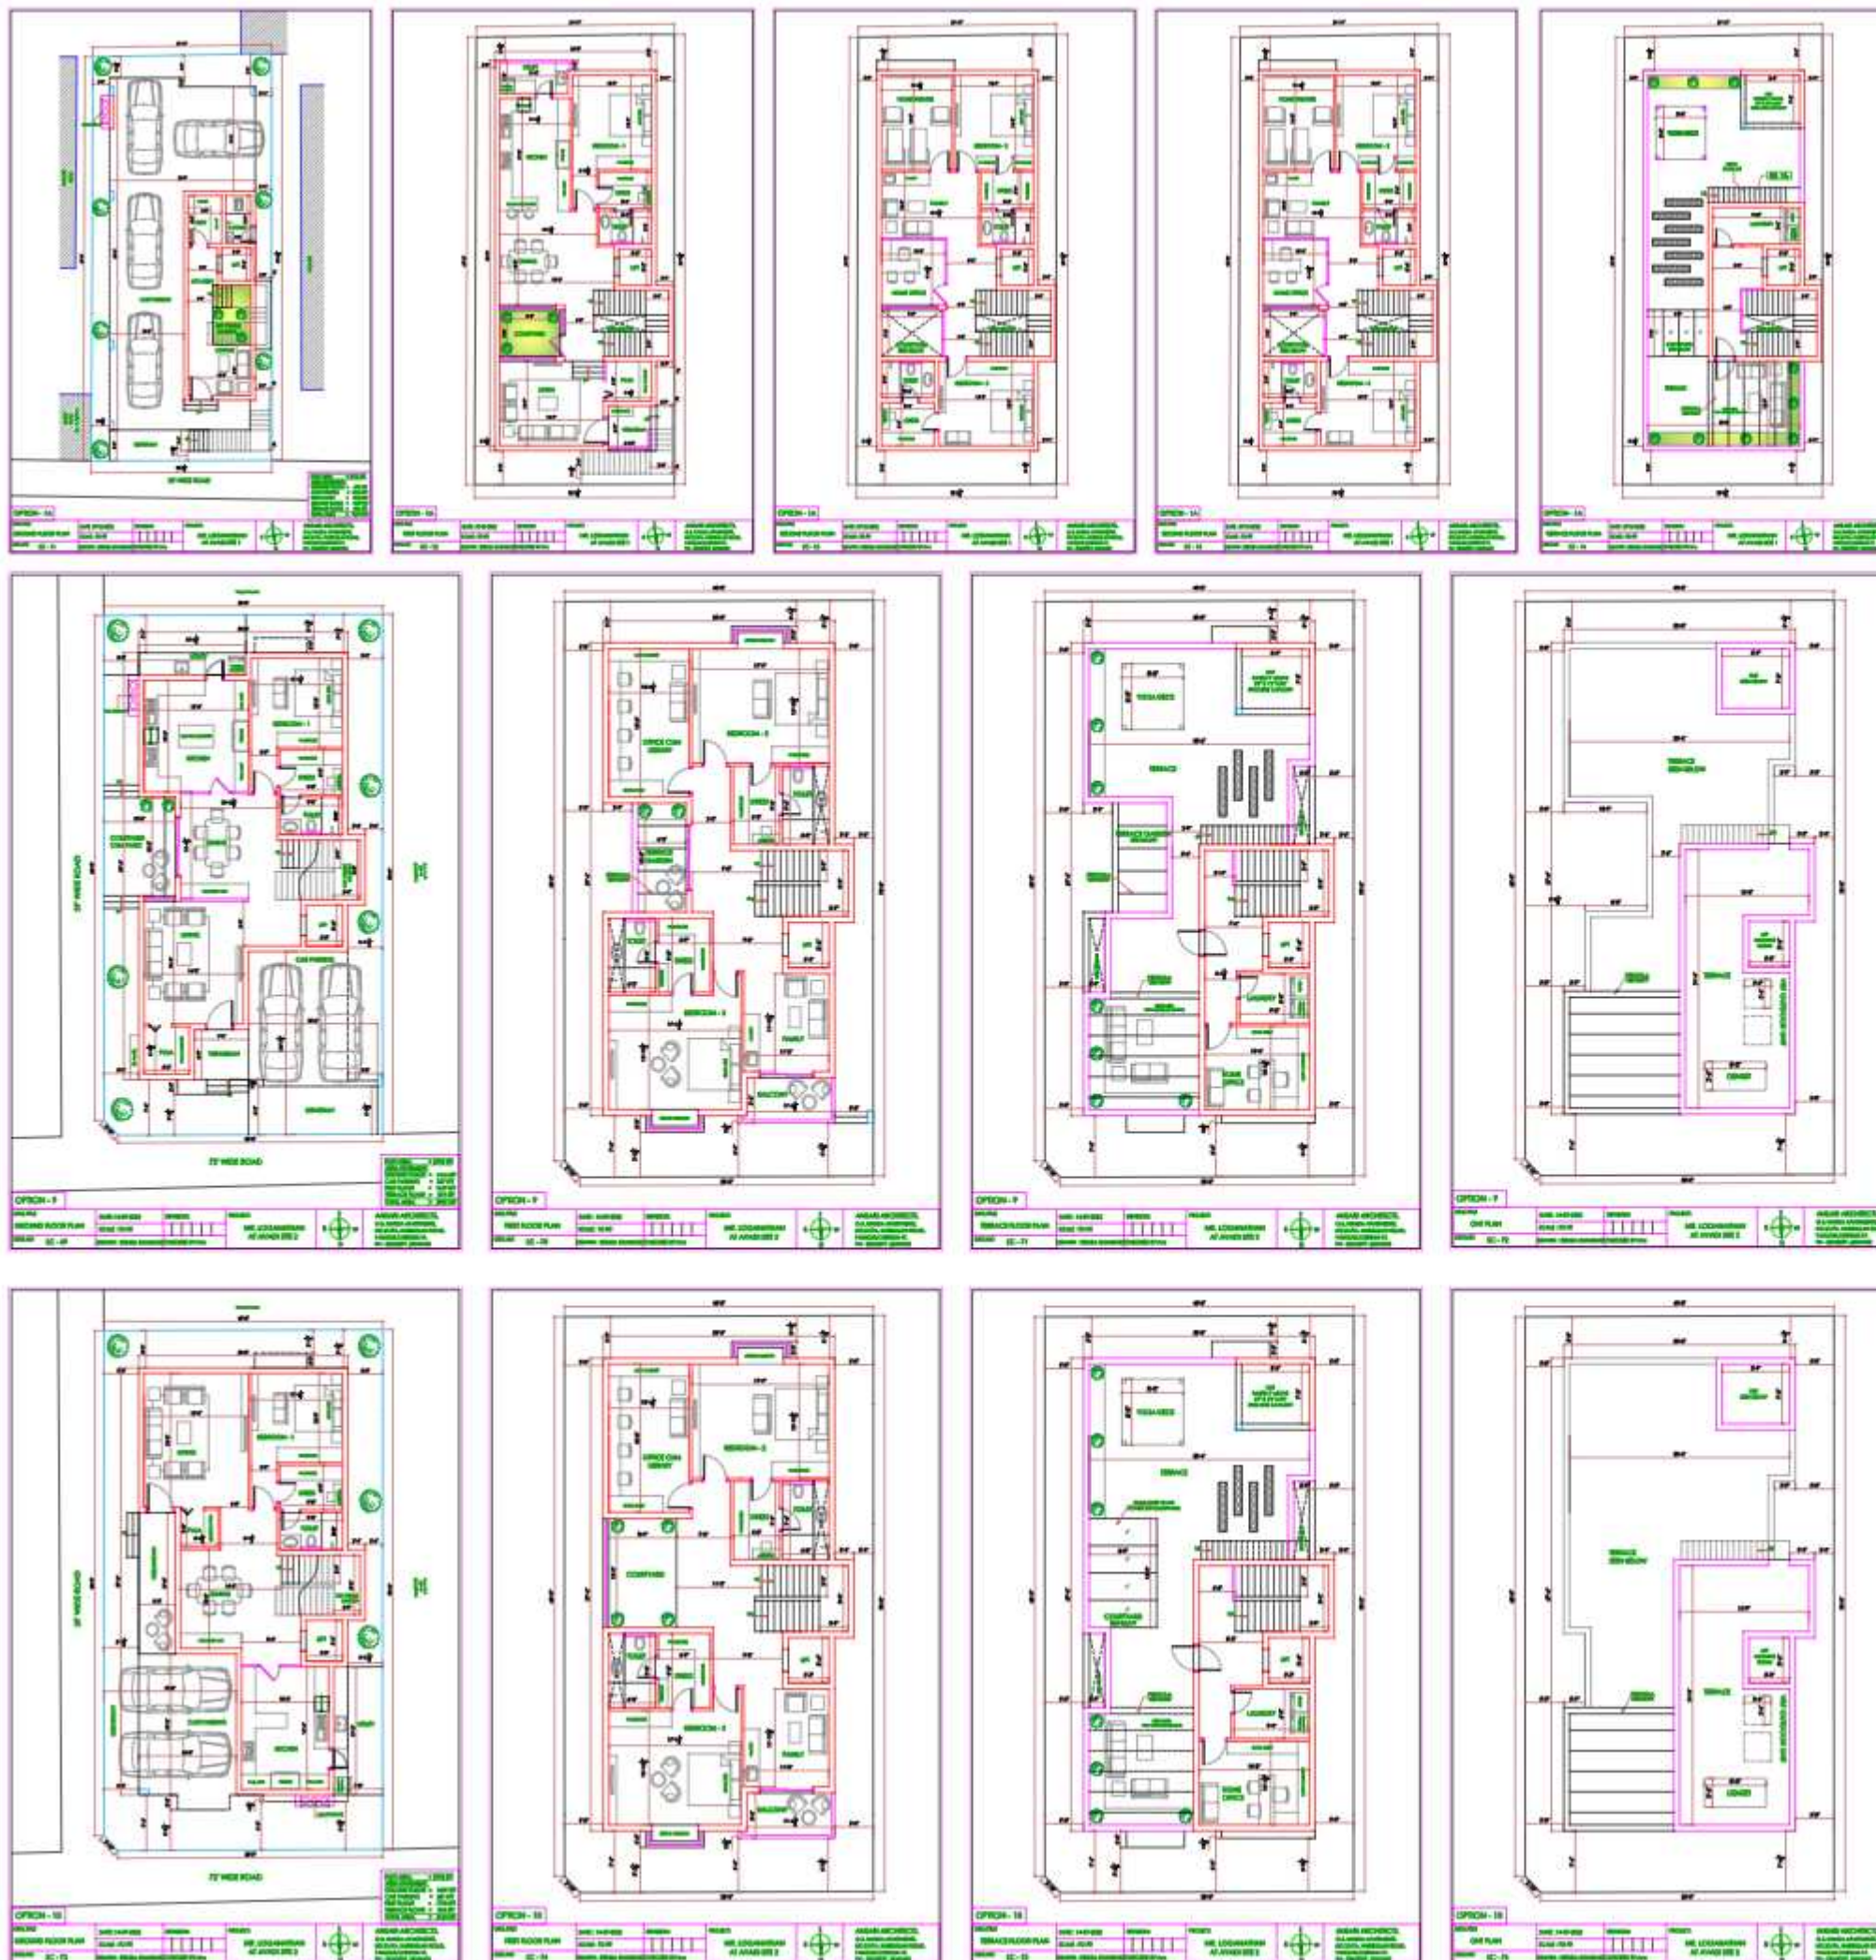


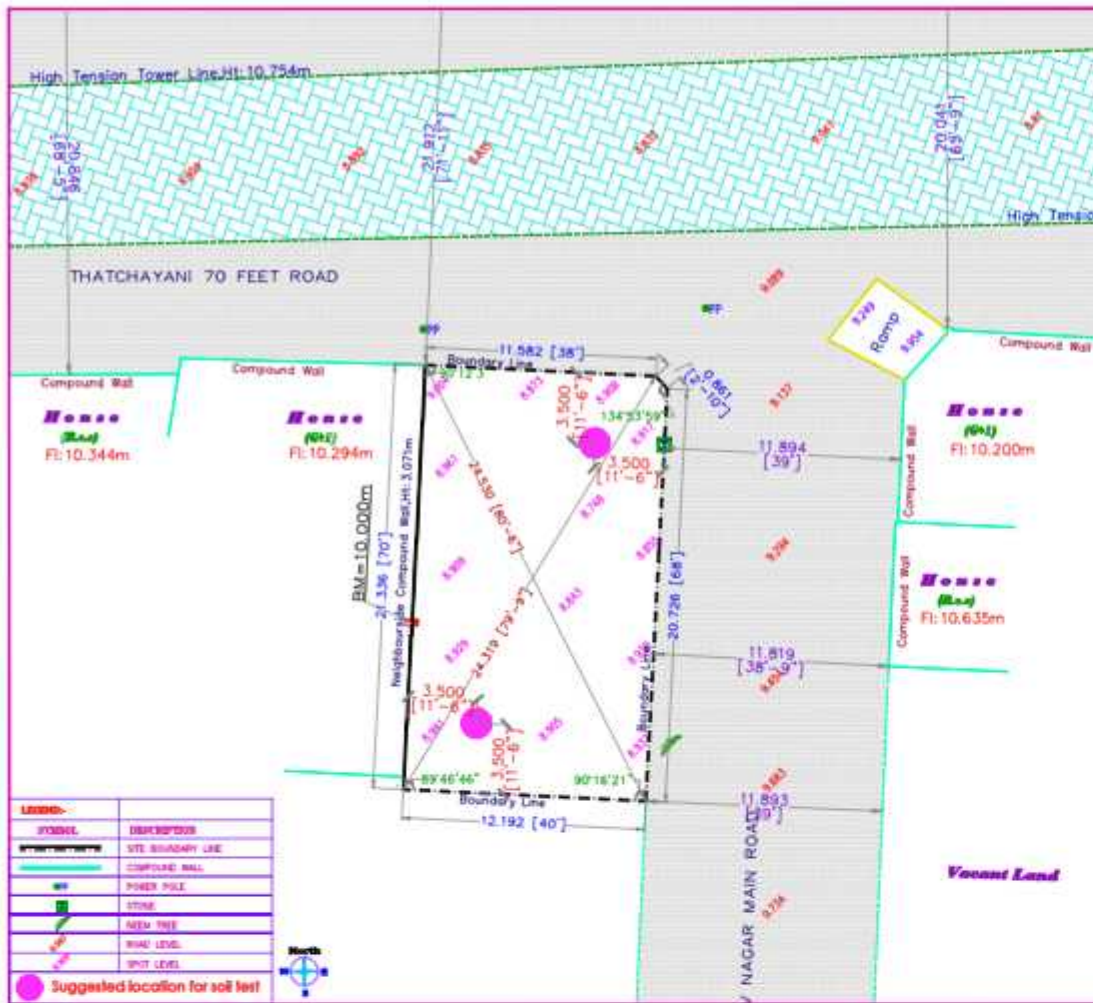


- Initially site survey drawing will be given in which all details about site topographical heights, road width, drainage lines were provided
- Even location of existing borewell, trees, building etc., will be mentioned in the same
- Spots for the soil test were provided
- The site is a corner plot abutted by two roads of 72' and 39' wide
- Nearby buildings are mostly G+1 structures
- As per CMDA allowance 5 feet setback must be provided all around the building from the site
- Planning is done accordingly but certain deviations are done due to space constraints
- Those deviations in widths and heights are shown in the drawings here

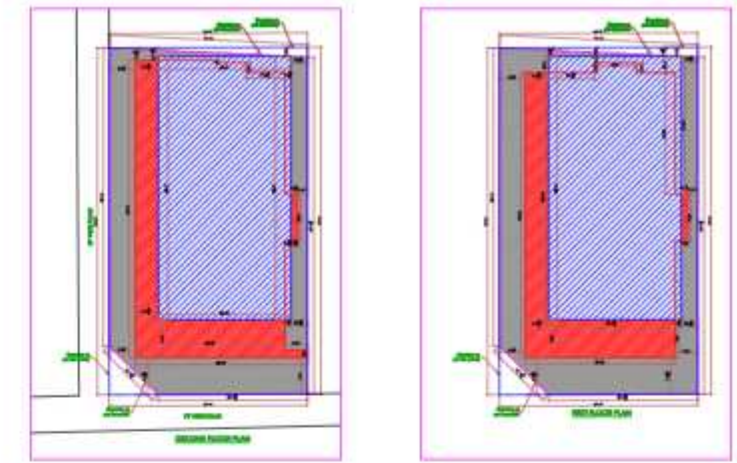


DEVIATION DRAWINGS

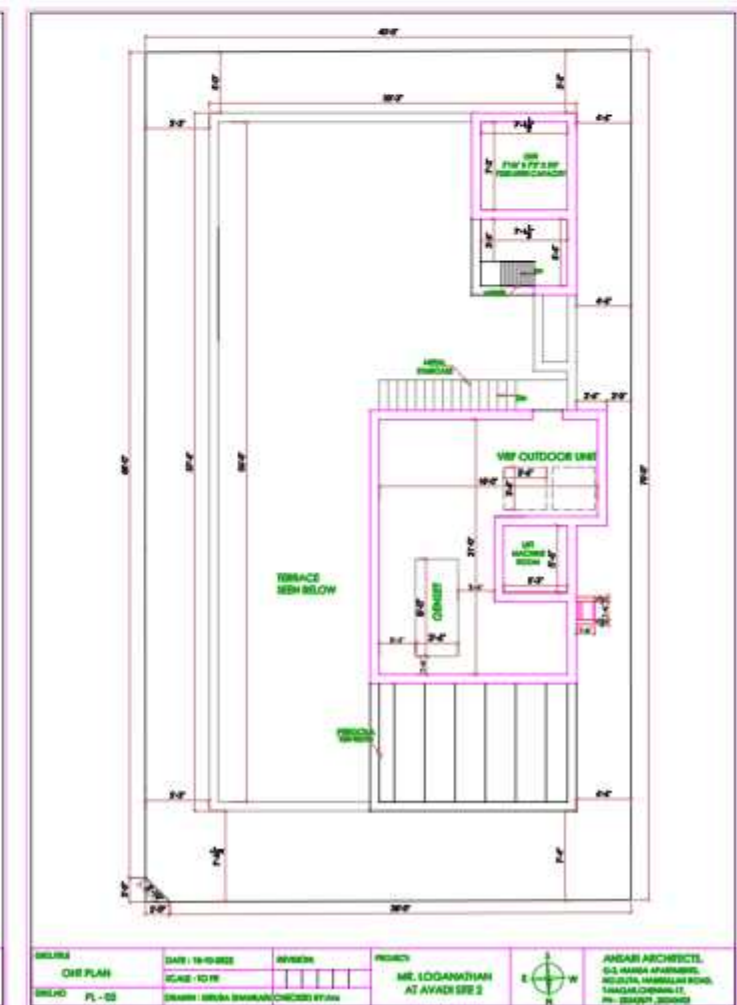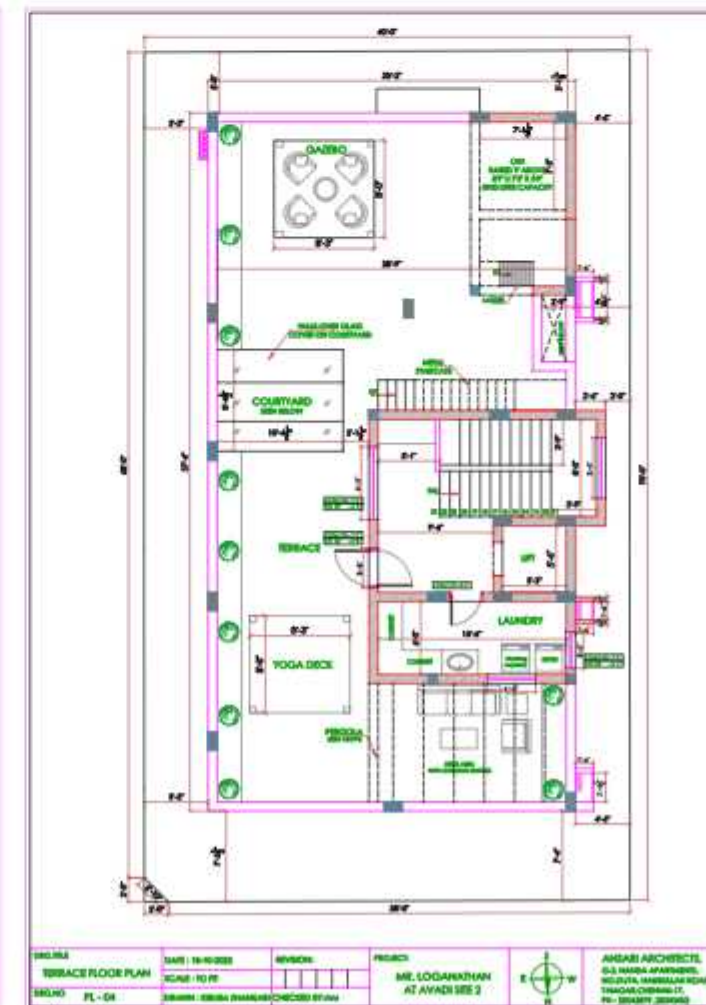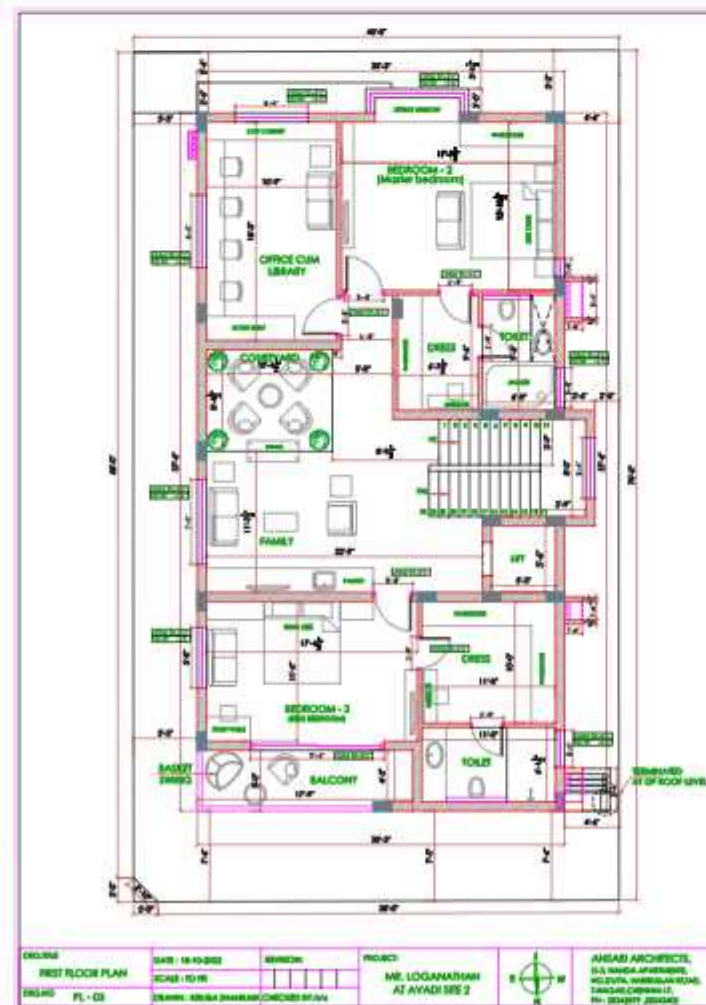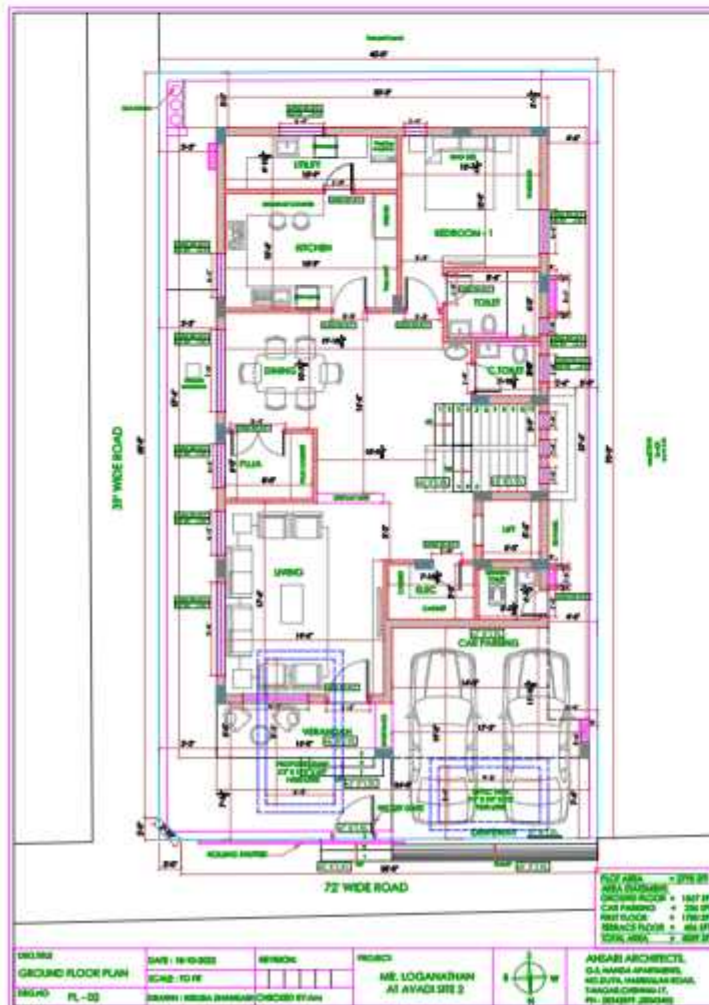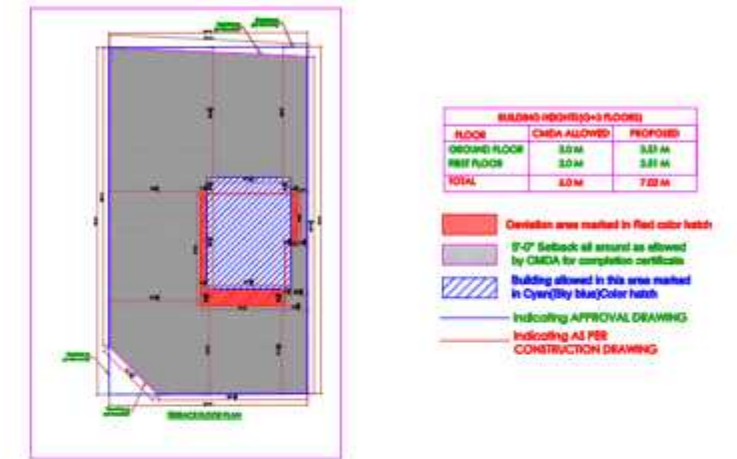


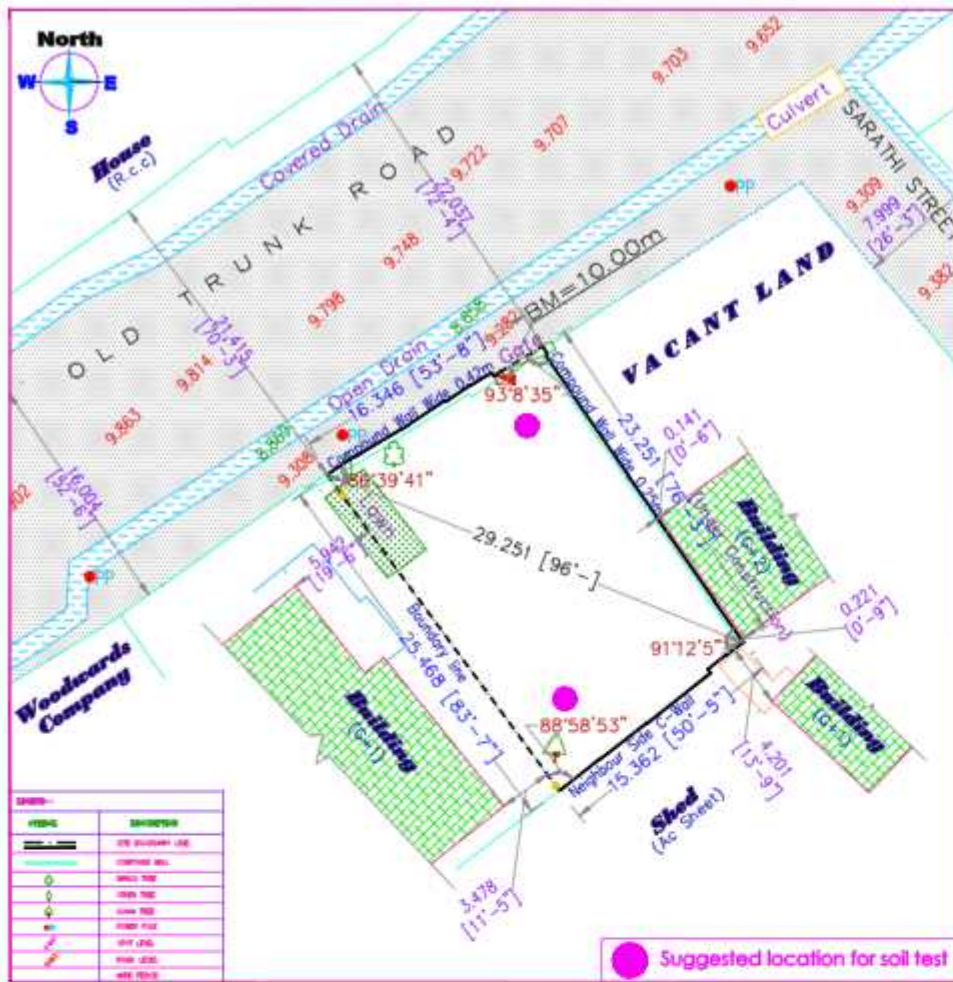

- Initially starts with Survey Drawing in which all details will be mentioned like location of existing borewell, trees, building etc.,
- Topographical heights, road width, drainage lines will be also provided in the same.
- A spot for the soil test was also mentioned, and this site has one mango and guava tree.

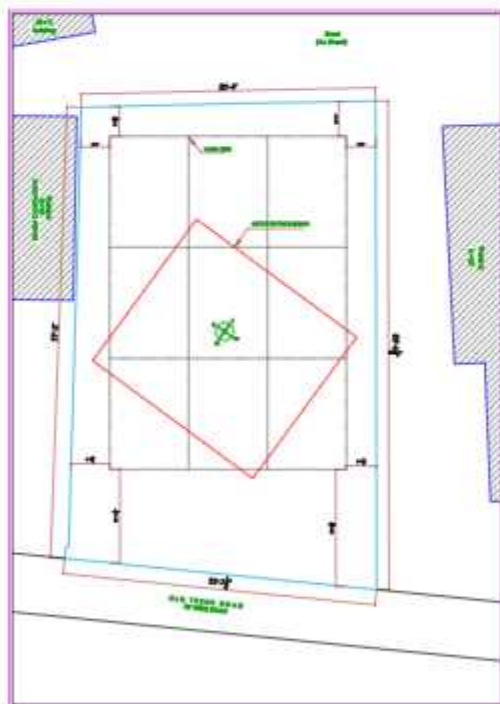

VASTU GRID

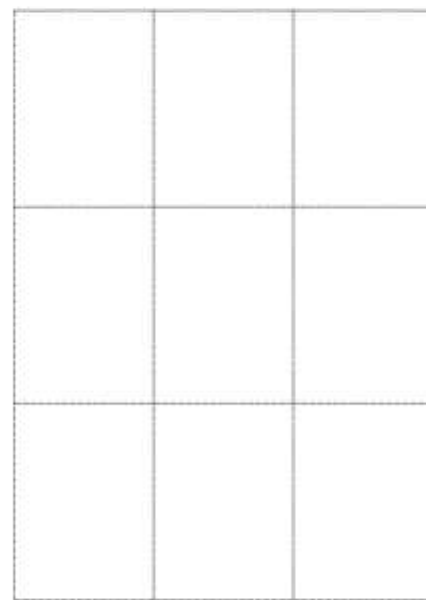

- The plot's orientation is not aligned with the cardinal directions.
- Nevertheless, there is no need to tilt the building, and thus a grid is incorporated, leaving the necessary setbacks for Vastu concerns.



1



2

- The first grid's hatched center area (NE, SW, and center) denotes that neither a toilet nor a staircase can be positioned there.
- The second grid's hatches indicates that a Pooja Room may be kept in the E, N, NE, and center directions in accordance with Vastu.

MR. DHANAKOTTI AT PALLAVARAM - CLIENT BRIEF

Plot Area 4147 sq. ft

G+2

GROUND FLOOR






- 3 to 4 Car Parking
- Office 1000 Sq. ft to 1500 Sq. ft
- 4 Cabins
- Servant Room and toilet
- Toilets for Office






FIRST FLOOR

- Large Living
- Dining
- Dry Kitchen
- Wet Kitchen
- Utility
- Pooja Room
- Master Bedroom
- With Walk in Wardrobe
- Attached Toilet
- Courtyard

SECOND FLOOR

- 2 Bedrooms
- With Walk in Wardrobe
- Attached Toilet
- Family
- Home Theatre
- Balcony
- Lift needed till Terrace floor
- Exterior Staircase mandatory
- Needed equal floor heights
- Terrace garden, sitouts, gardens to be designed

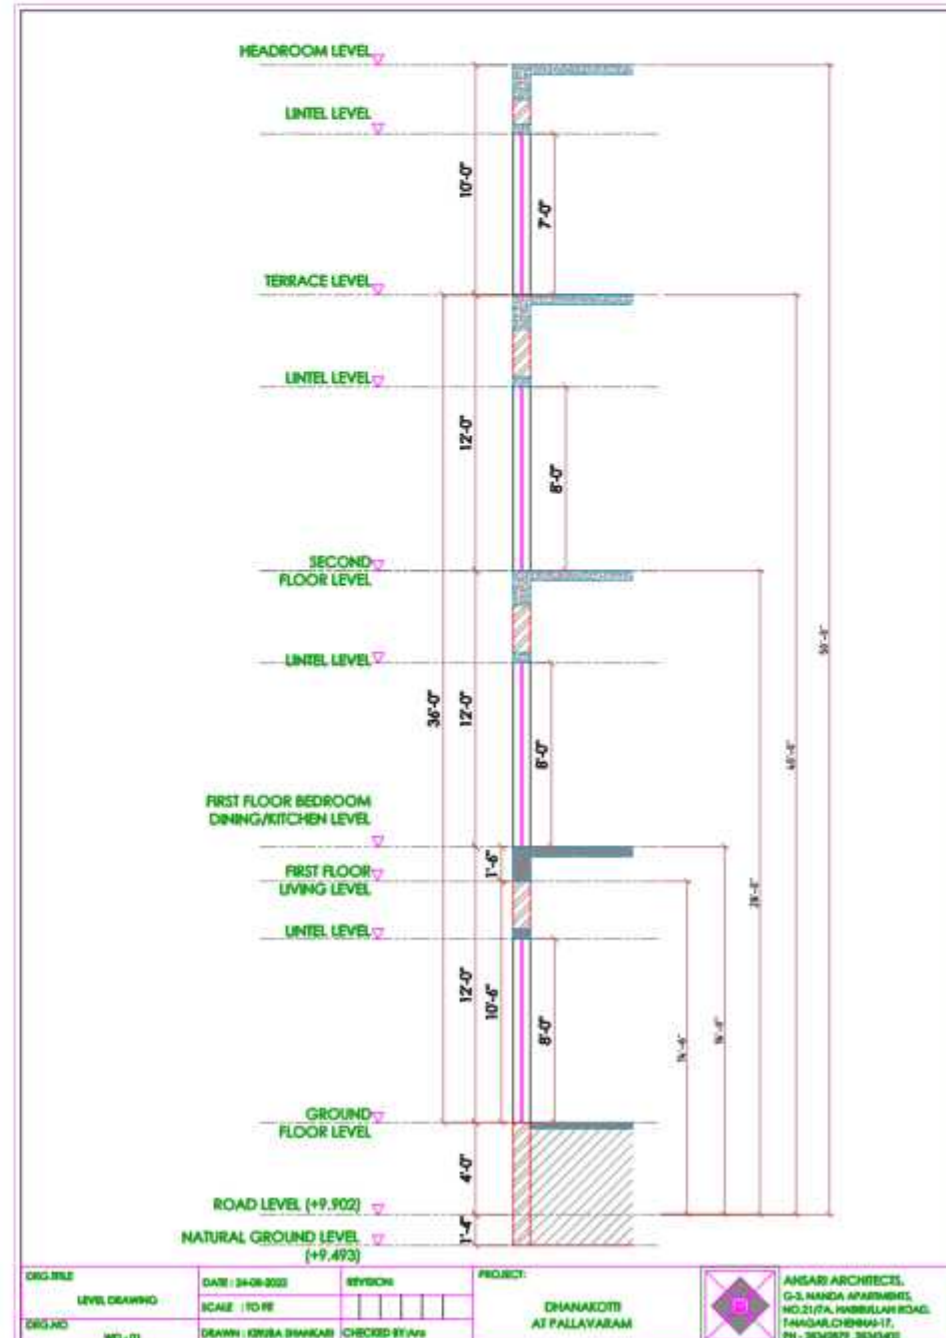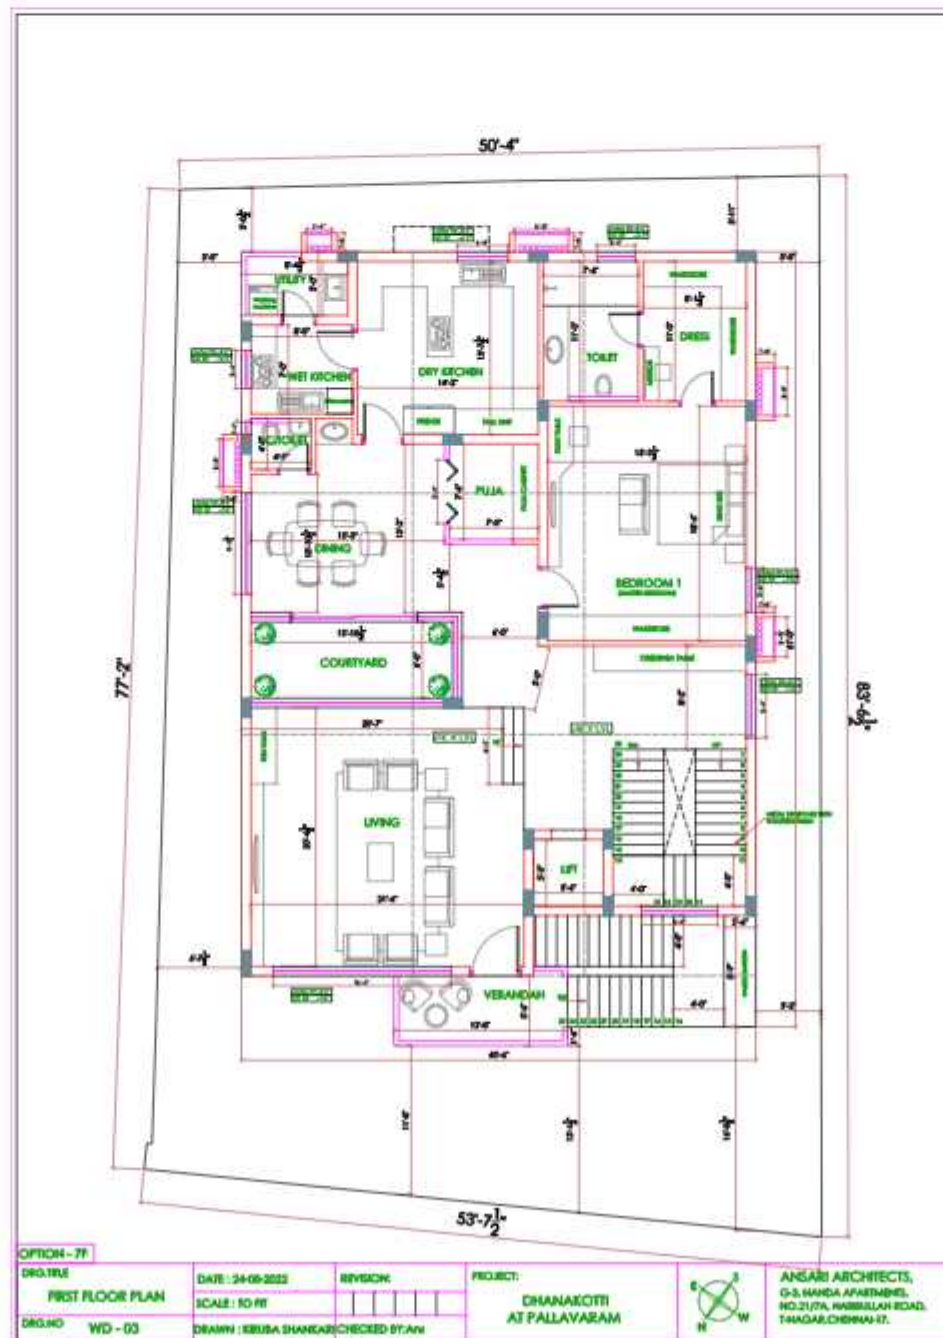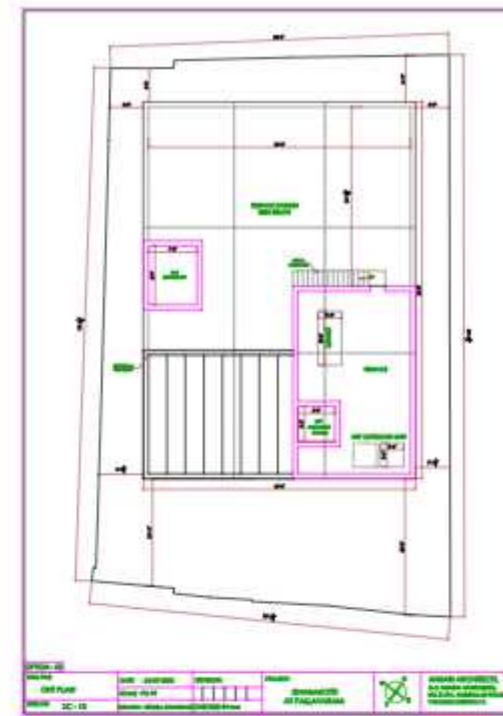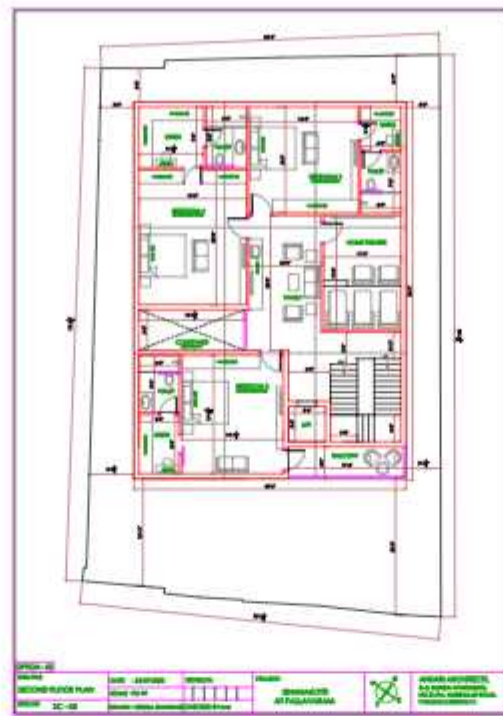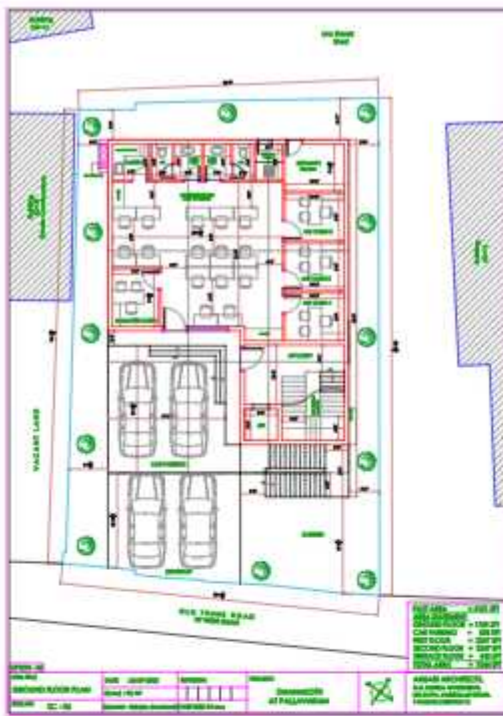

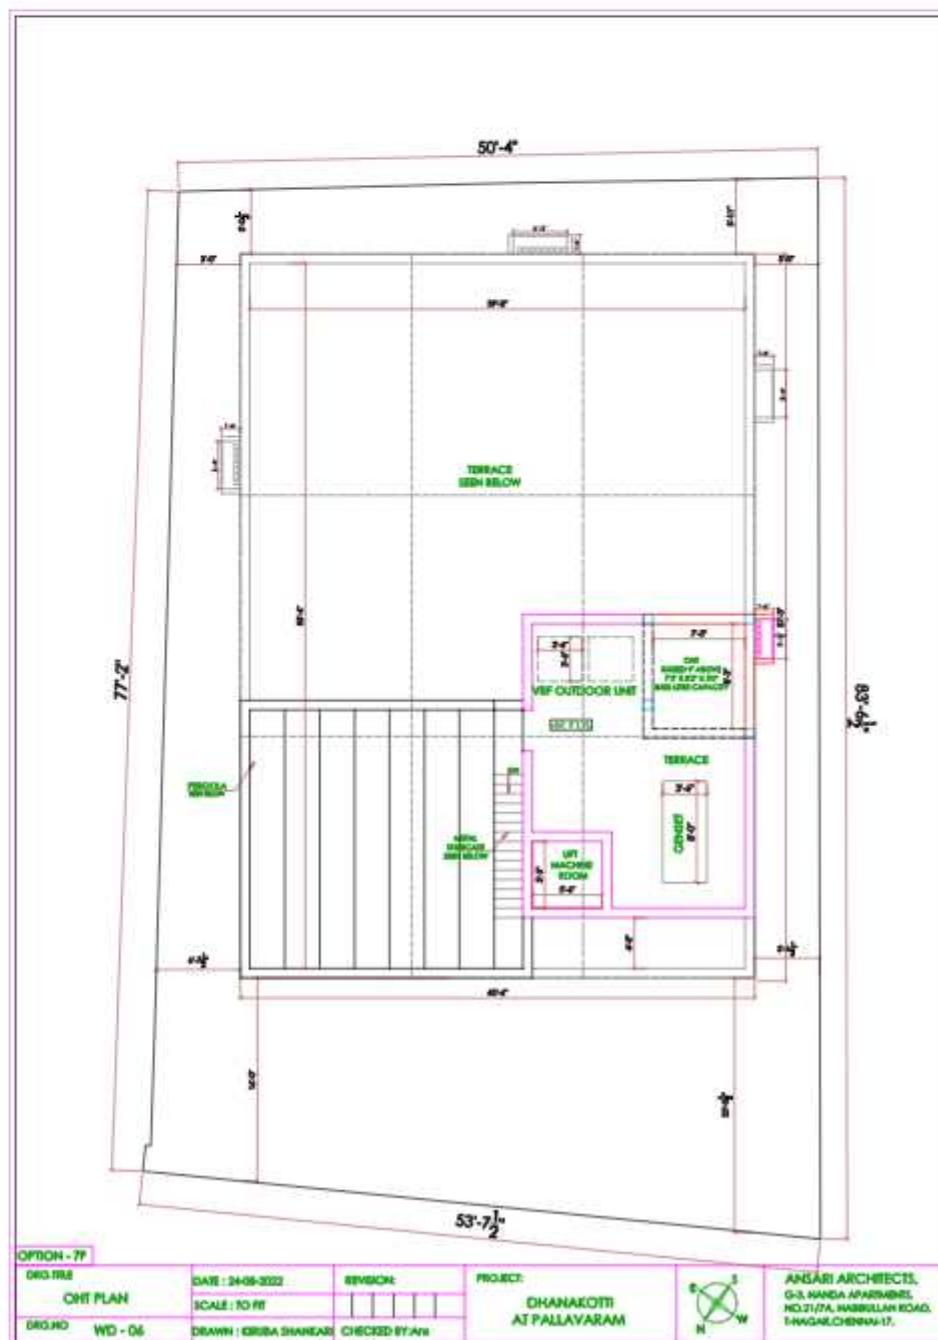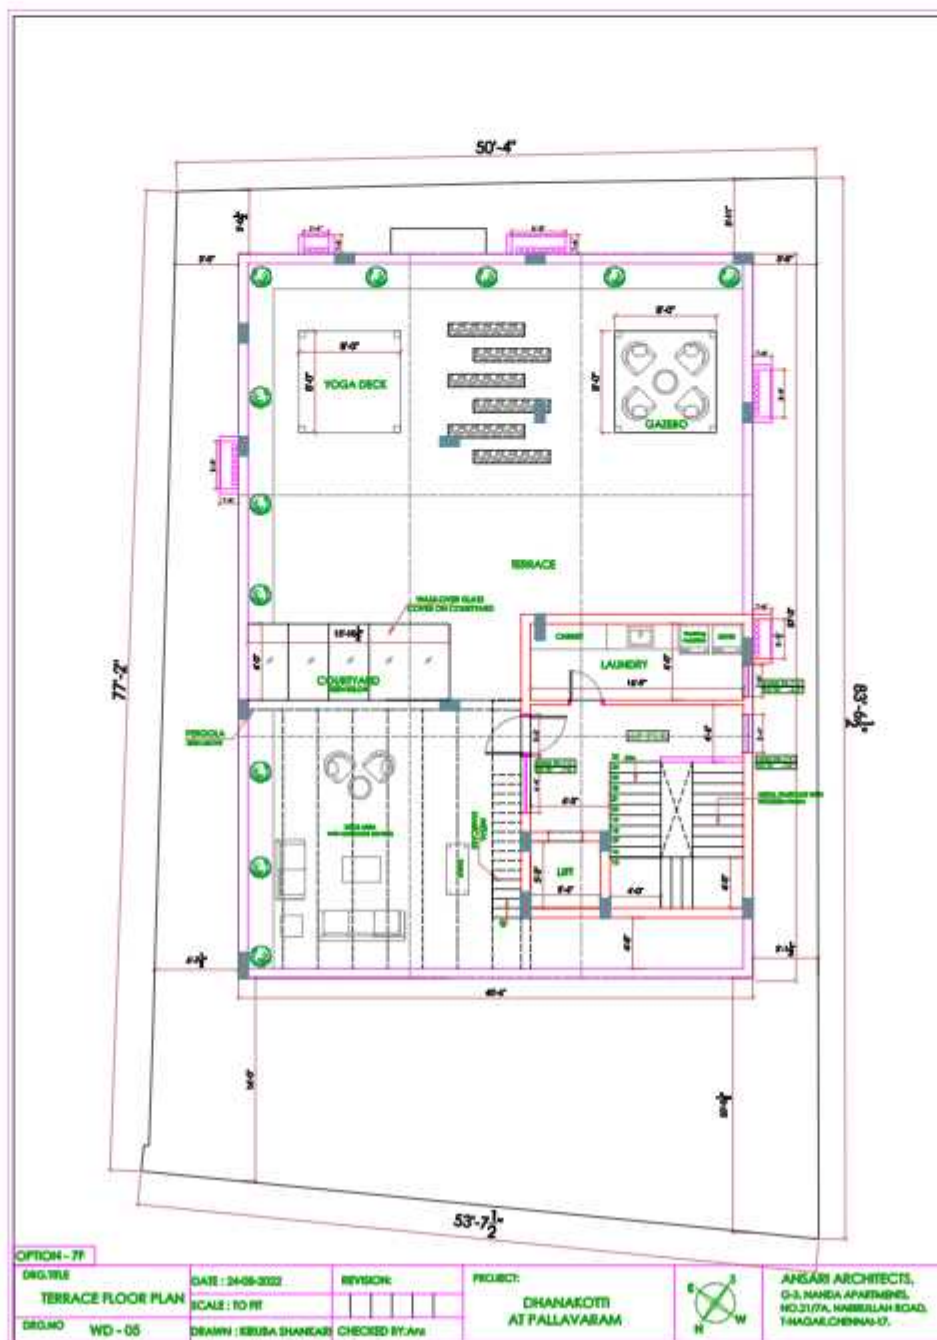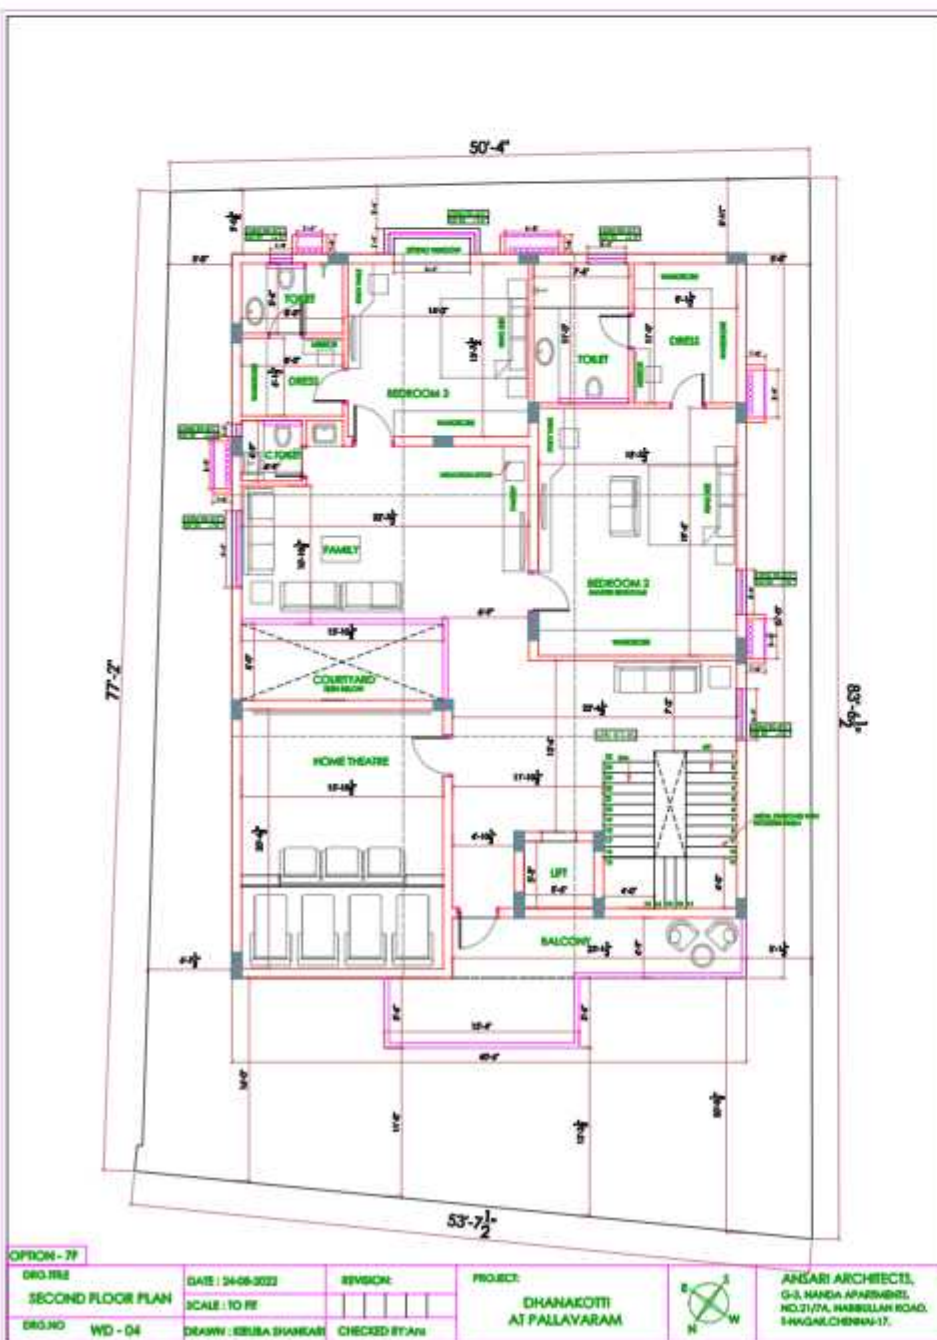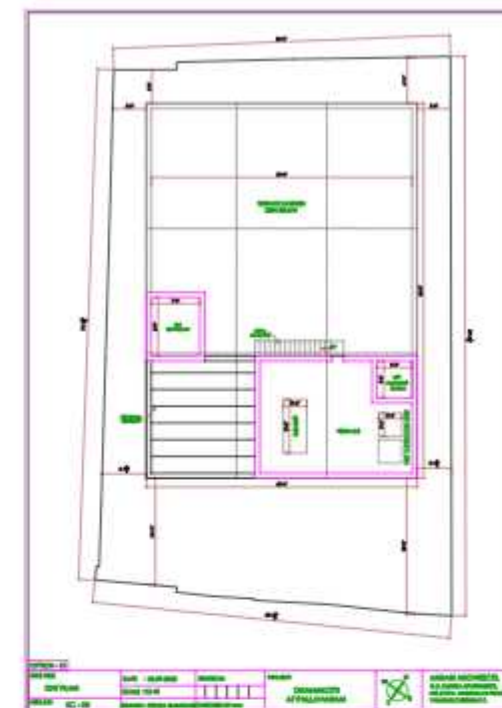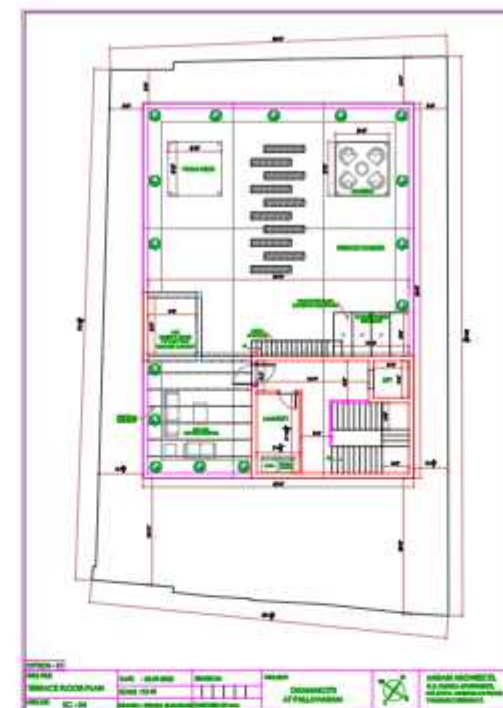

MR. SHAHUL AT EDALAKUDI -

CLIENT BRIEF





Plot Area 4937 Sq. ft







GROUND FLOOR

- Large Living
- Dining
- Kitchen
- Utility
- 2 Bedrooms
- With Walk in Wardrobe
- Attached Toilet

FIRST FLOOR

- Family with Study
- 2 Bedrooms
- With Walk in Wardrobe
- Attached Toilet
- Gym
- Balcony
- Site is abit narrow so as per regulations we attached the building towards one side of the plot
- Options were given but client asked for Grand double height entrance like in the image here sent by client
- And some more requirements were revised, like instead of wet and dry kitchen asked for open single kitchen with breakfast counter, asked for more setback in the backyard as well as in the front side
- Also they included skylight for the Kitchen to be naturally lit in the requirement.

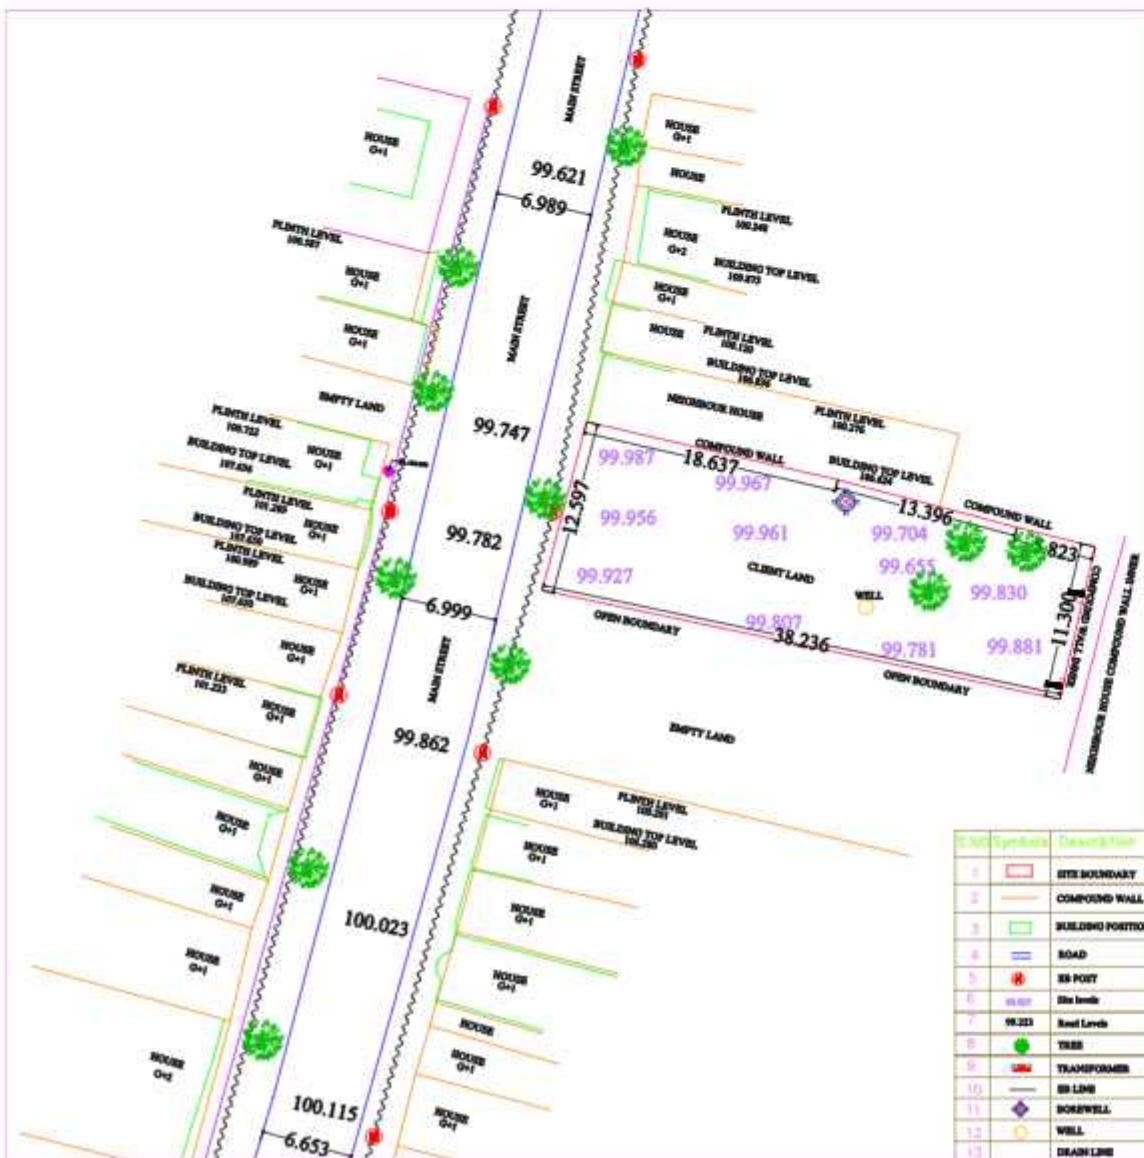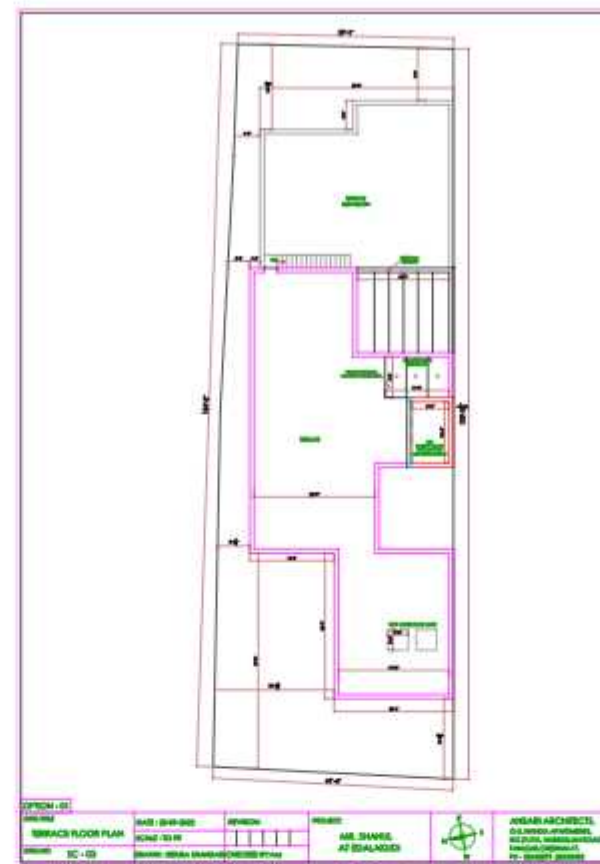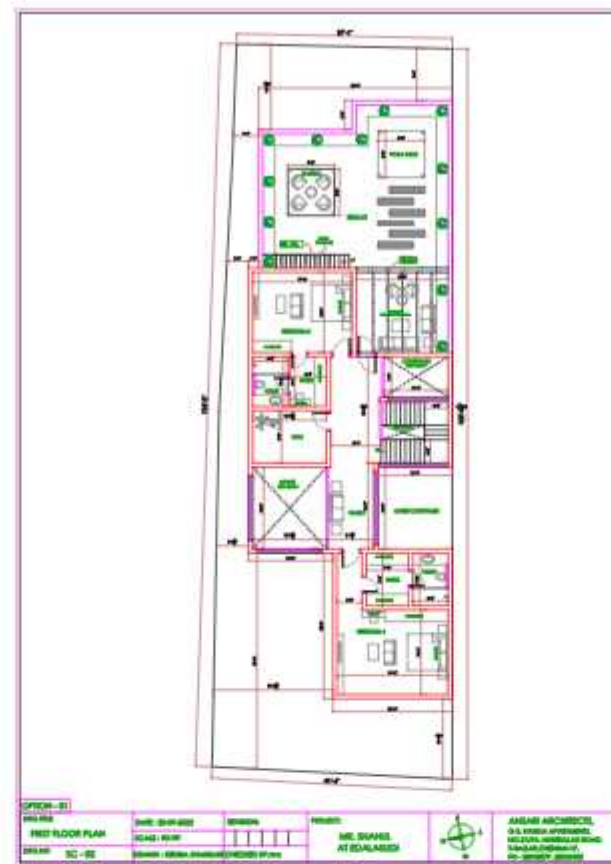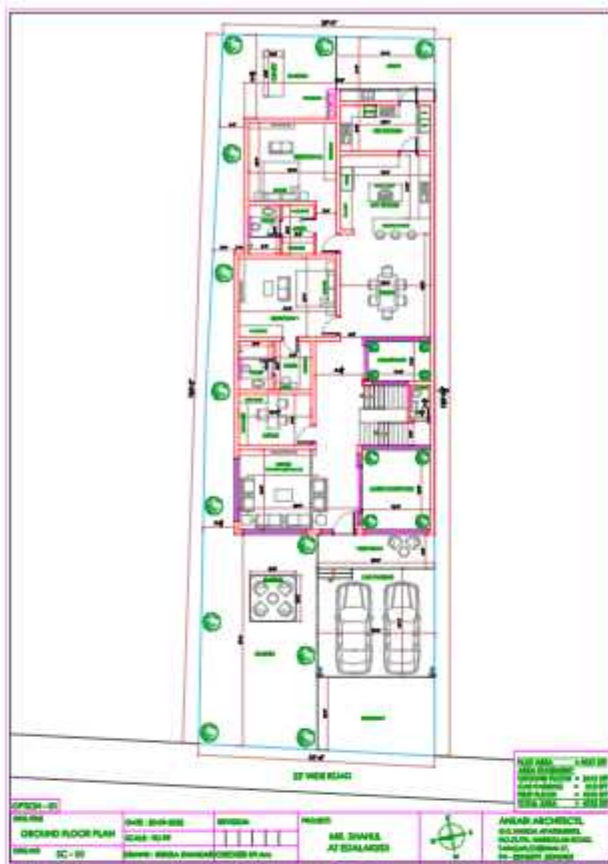

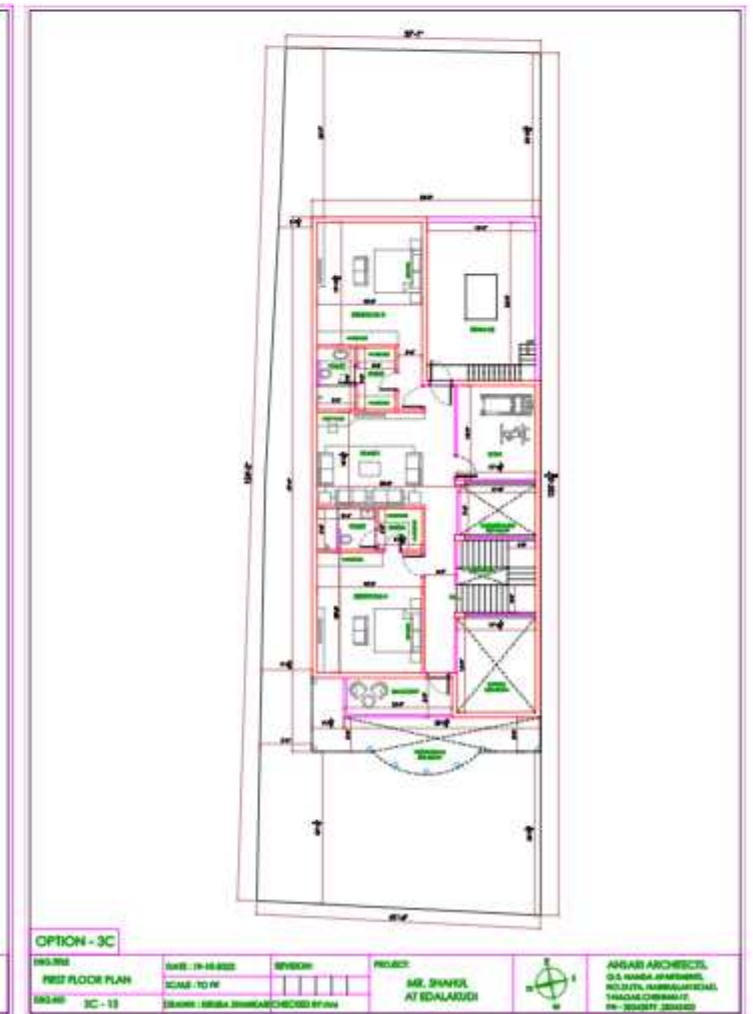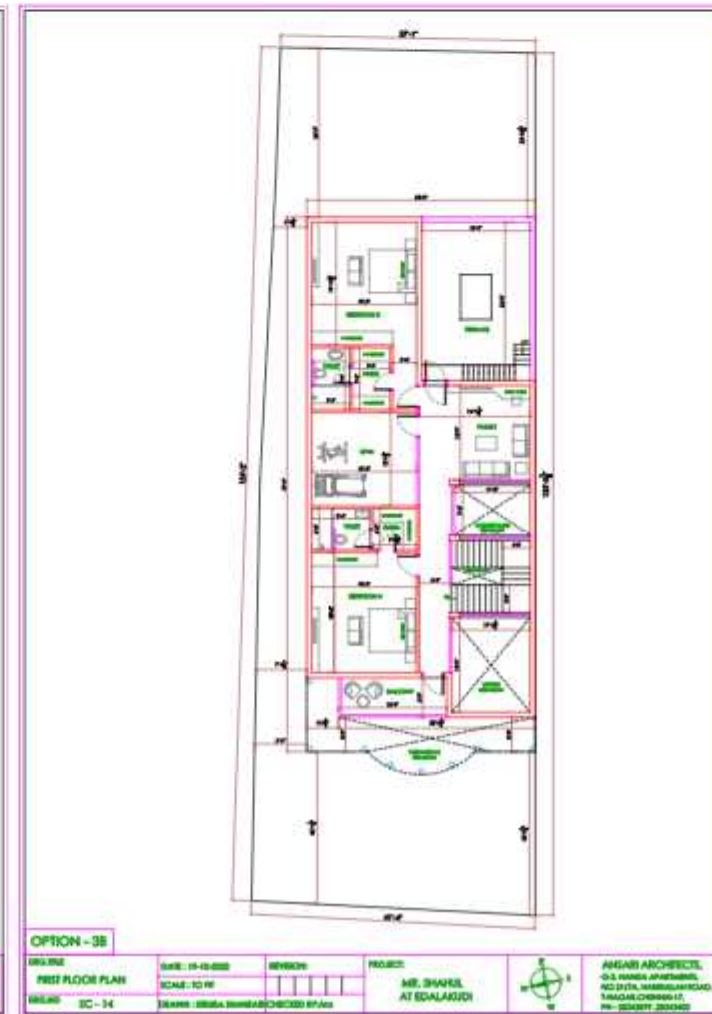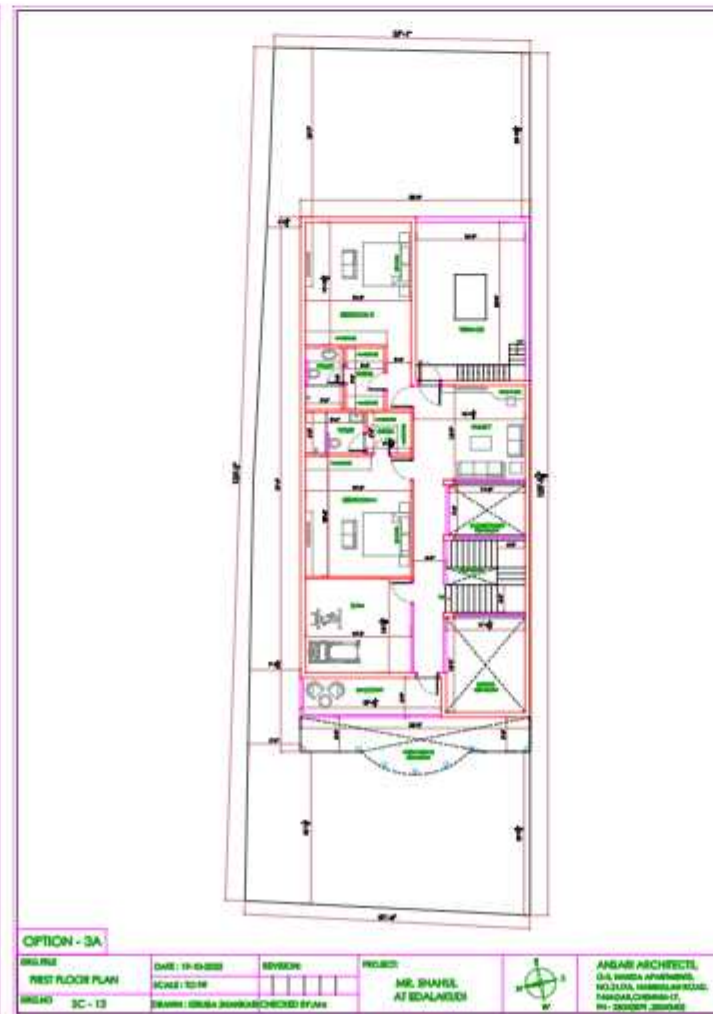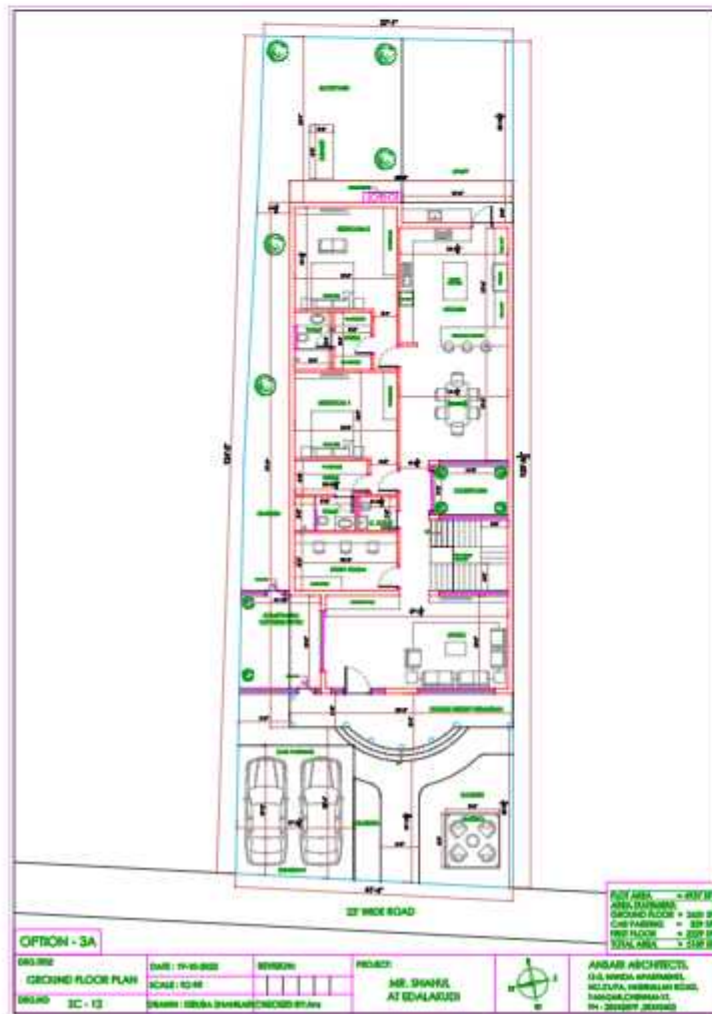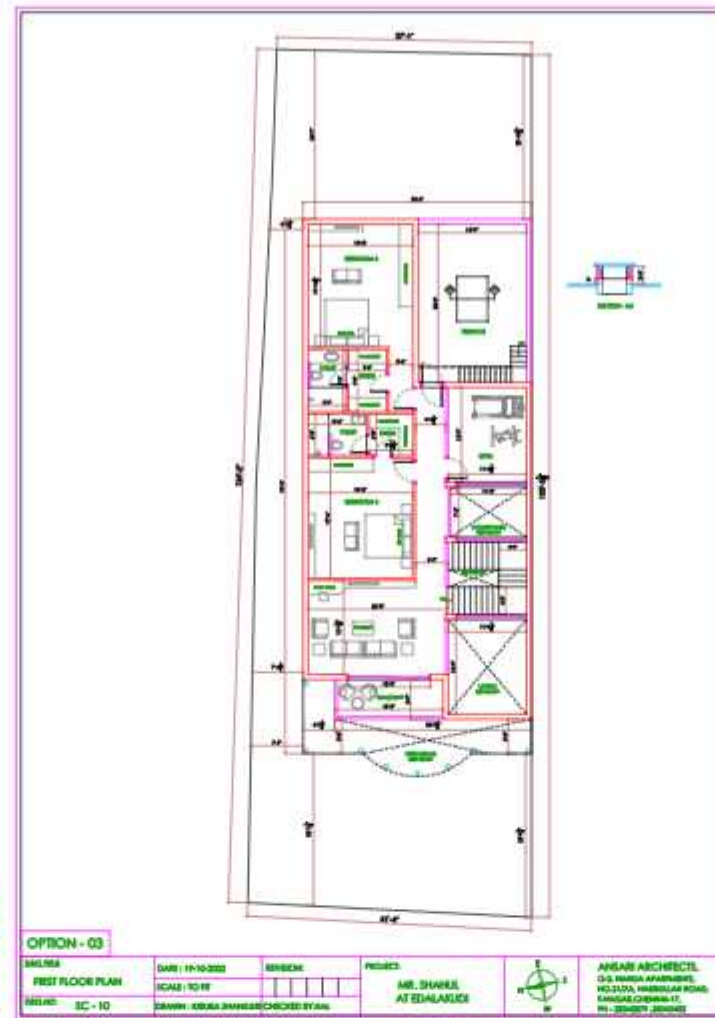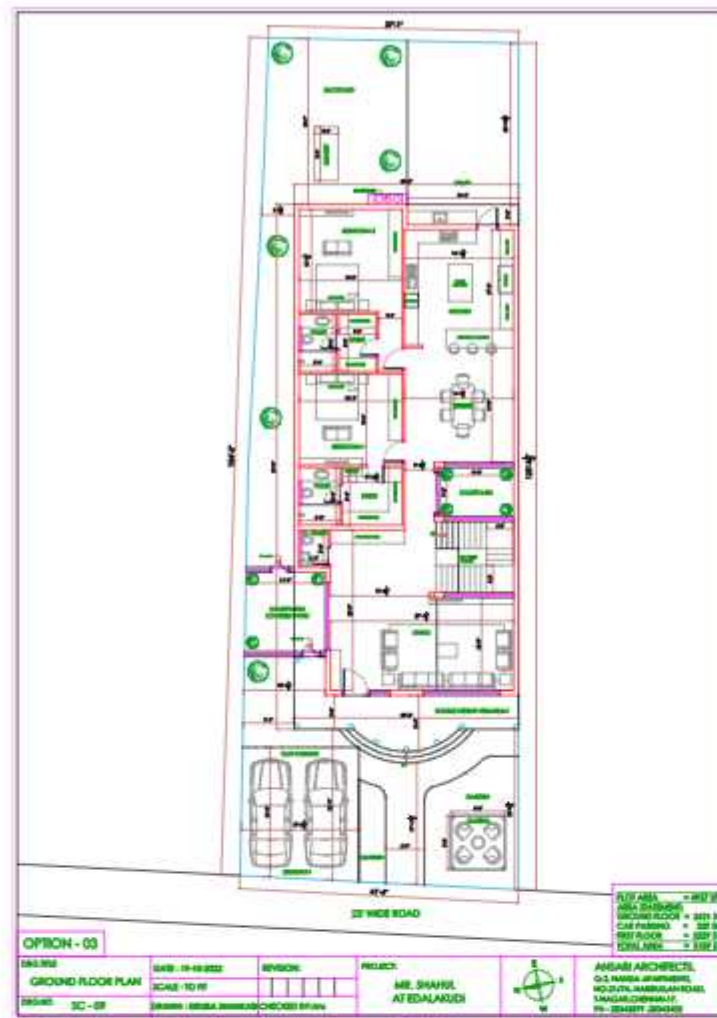

MR. RANJITH AT INJAMBAKKAM - CLIENT BRIEF

Plot Area - 600 Sq. ft

Stilt + 2

INDIVIDUAL HOUSE OPTION FIRST FLOOR

- Living
- Dining
- Kitchen

SECOND FLOOR

- 2 Bedrooms with toilet








RENTAL HOUSE OPTION FIRST FLOOR

- Living
- Dining
- Kitchen

- 2 Bedrooms with toilet

Identical Floor Plan for rental portions

- Leaving necessary setbacks building outline is taken.
- As per rules it can be attached to one side of the plot
- Considering ventilation cutouts were scooped out of it.

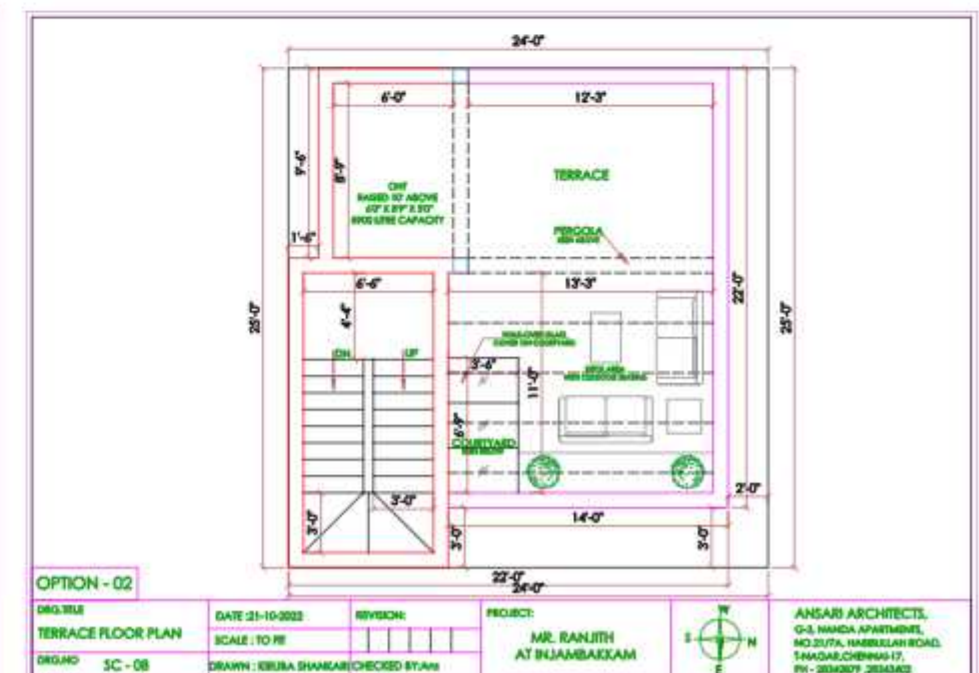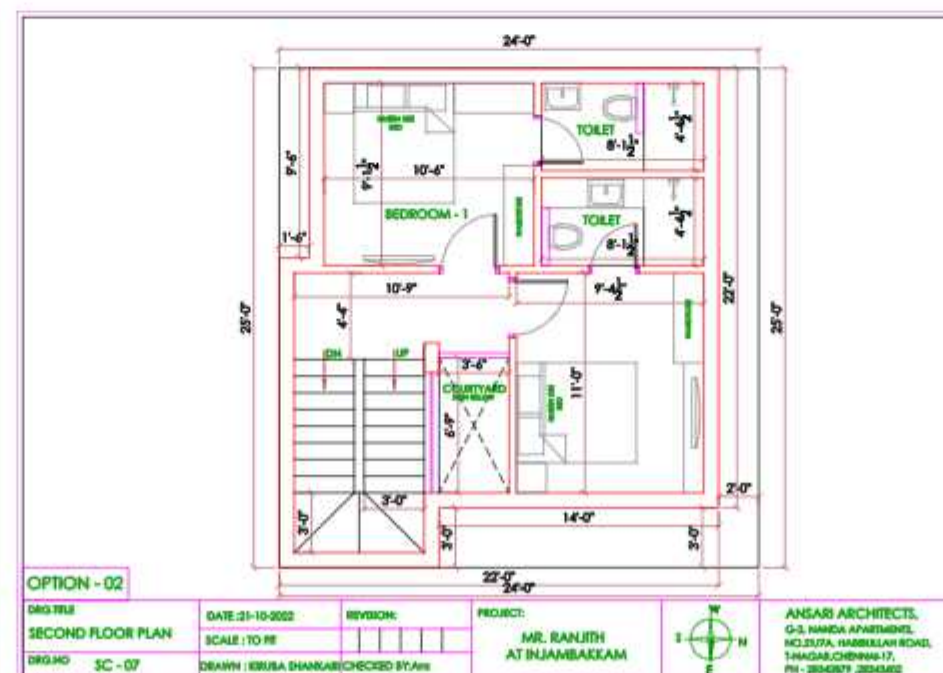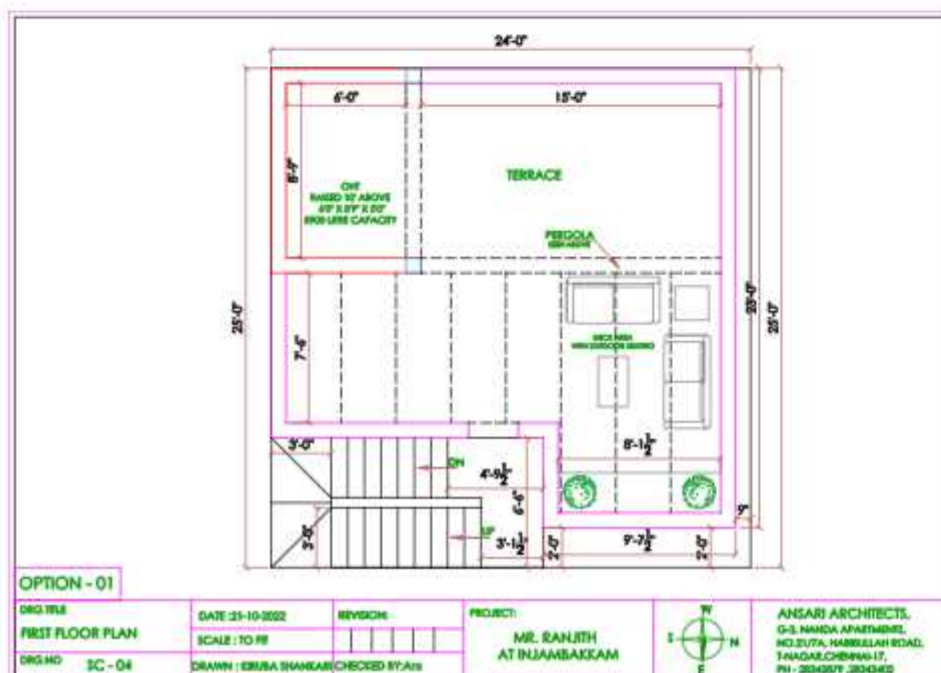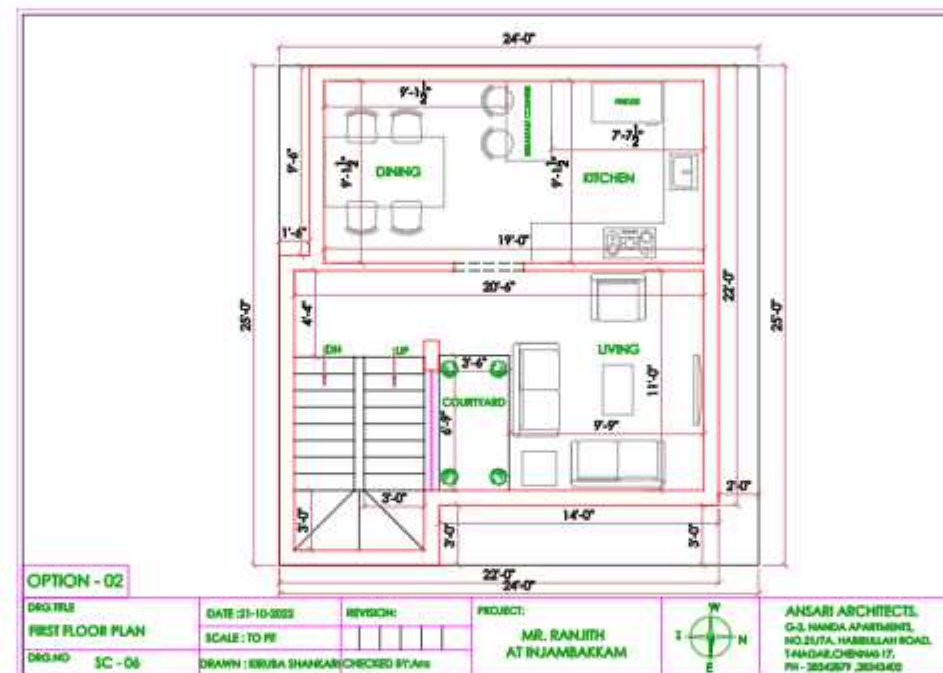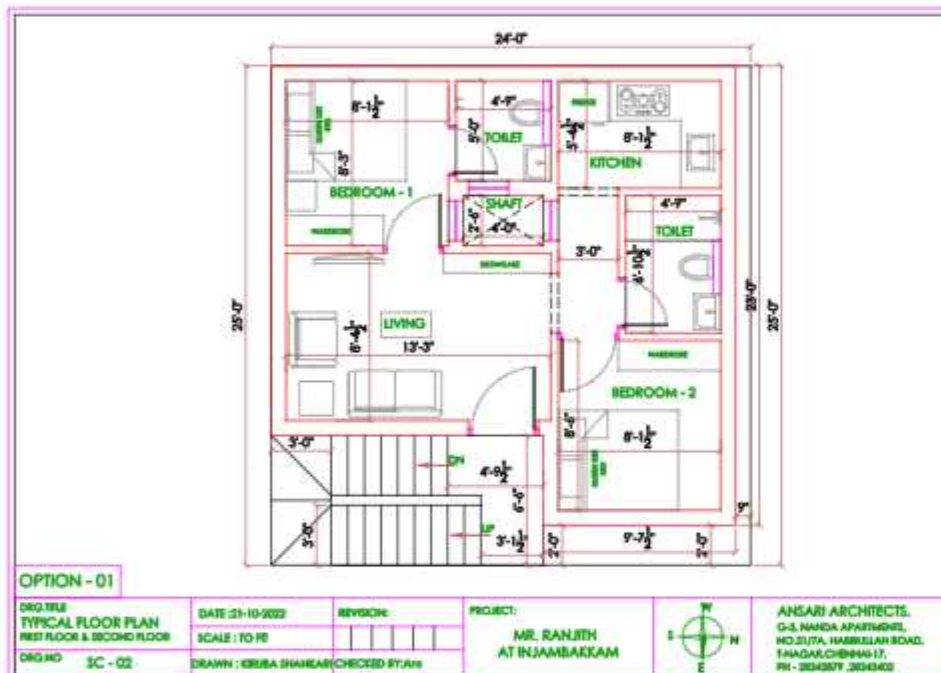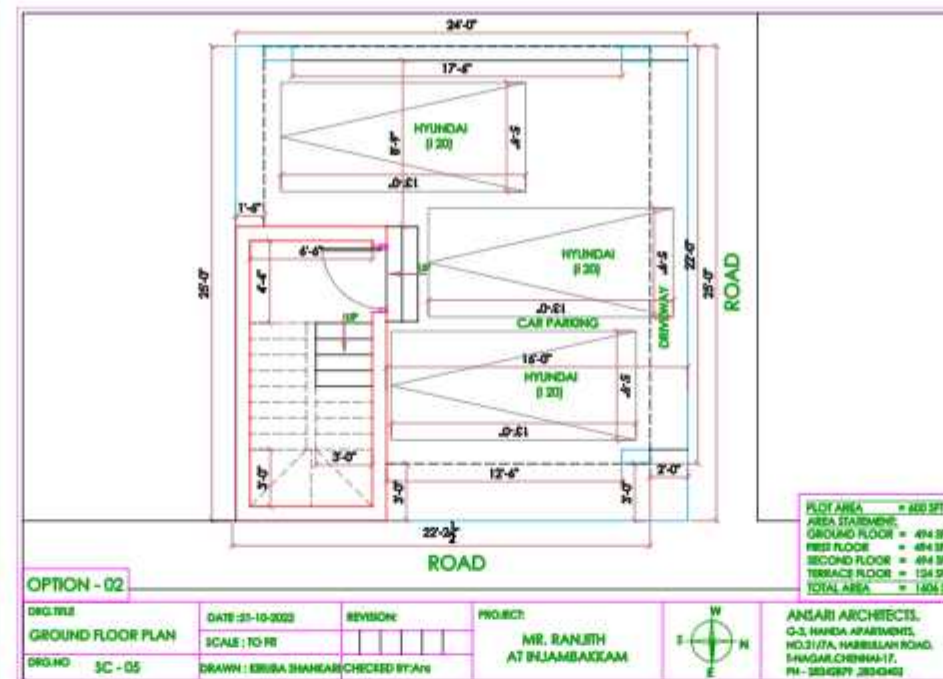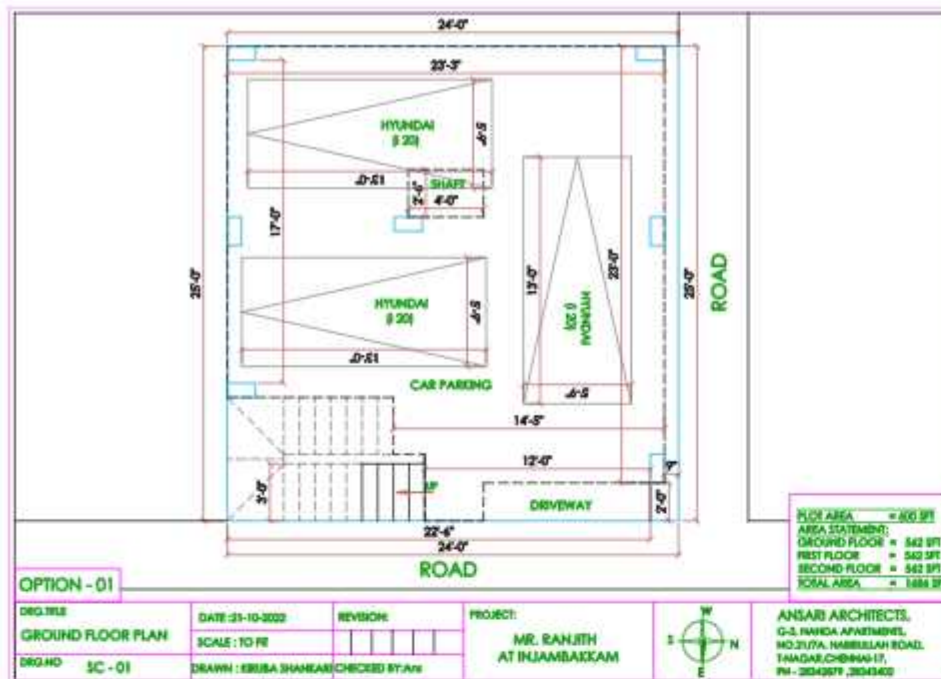

Mr. VIJAY RAAJAA AT BANGALORE - CLIENT BRIEF

Plot Area 4790 Sq. ft
GROUND FLOOR

- 3 Car Parking
- Formal Living
- Guest Bedroom with attached toilet
- Prayer room
- Office
- Home theatre
- Common toilet
- Swimming pool
- Servant room
- Servant's toilet
- Store room




FIRST FLOOR


- Living (Double Height)
- Dining
- Dry Kitchen (Open Kitchen)
- Wet Kitchen
- Utility
- Store
- Common toilet
- 2 Bedrooms
- With Walk in Wardrobe
- Attached Toilet
- Balcony
- Courtyard

SECOND FLOOR

- 3 Bedrooms
- With Walk in Wardrobe
- Attached Toilet
- Balcony


Garden near entrance, Exterior Staircase
Lift mandatory, Terrace Garden, Sit outs, Laundry
needed

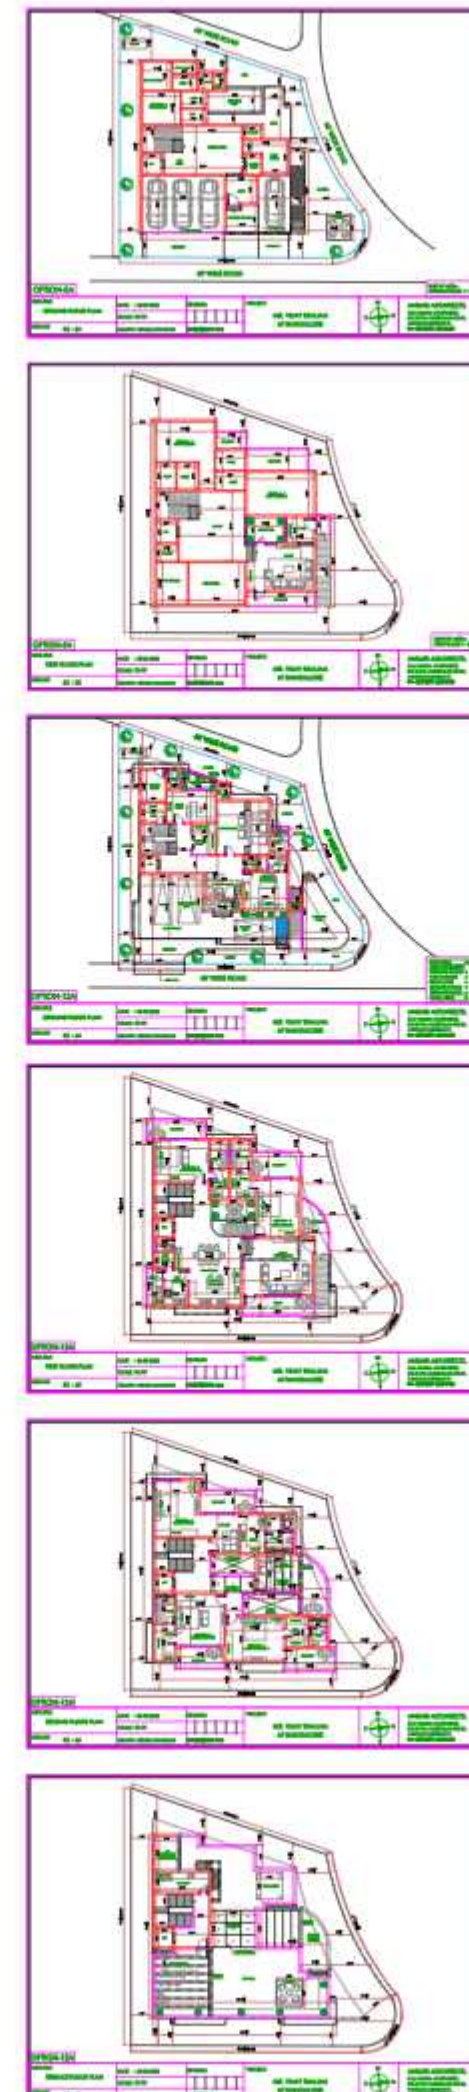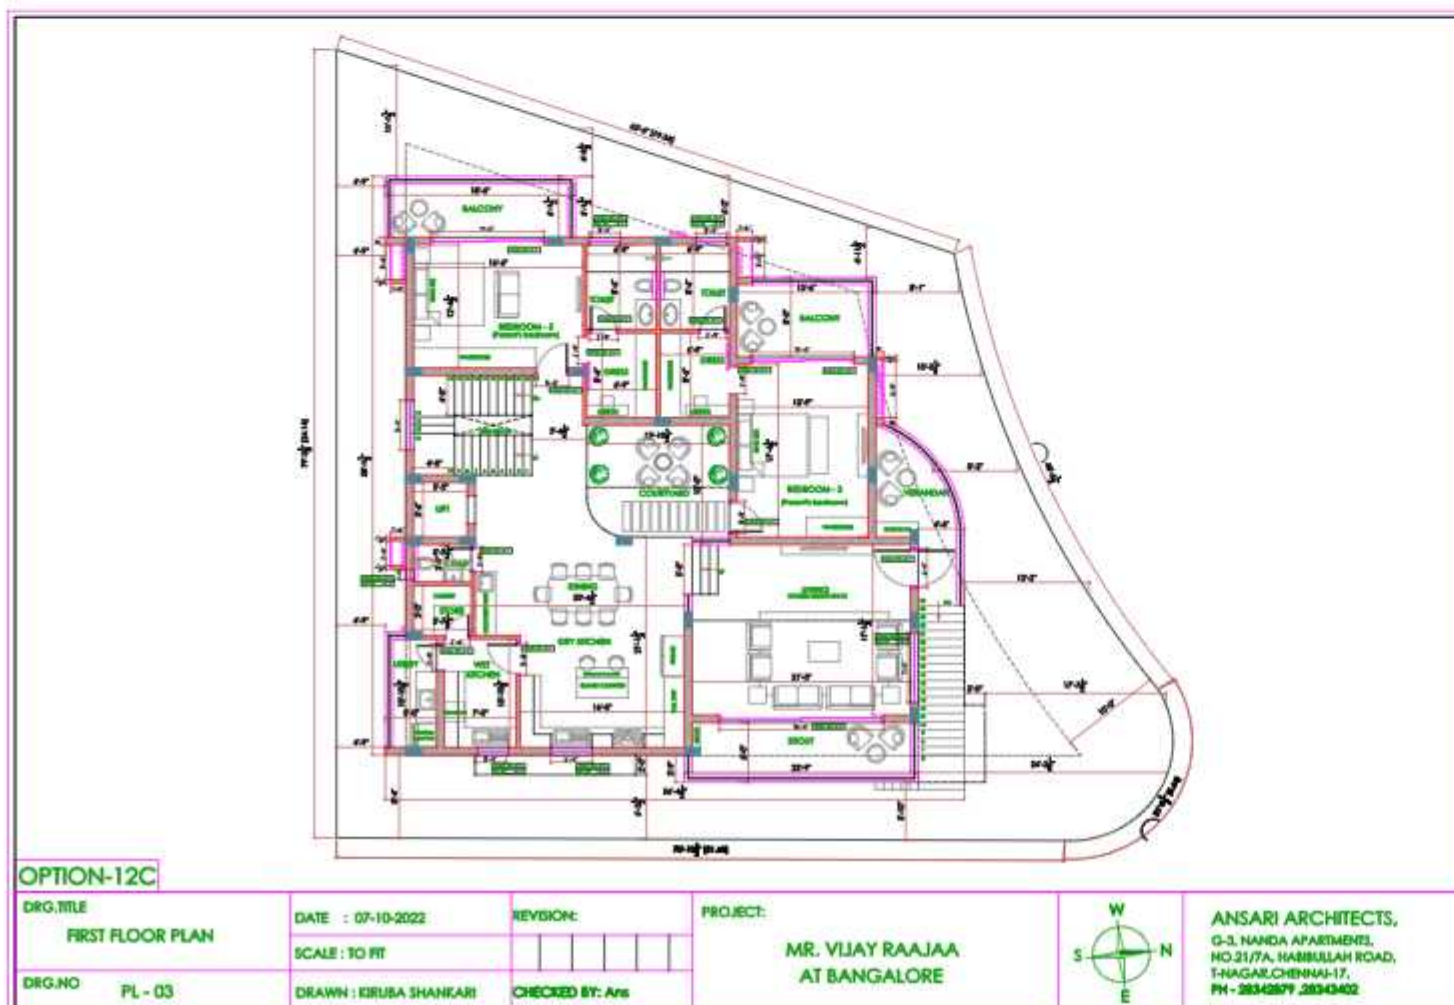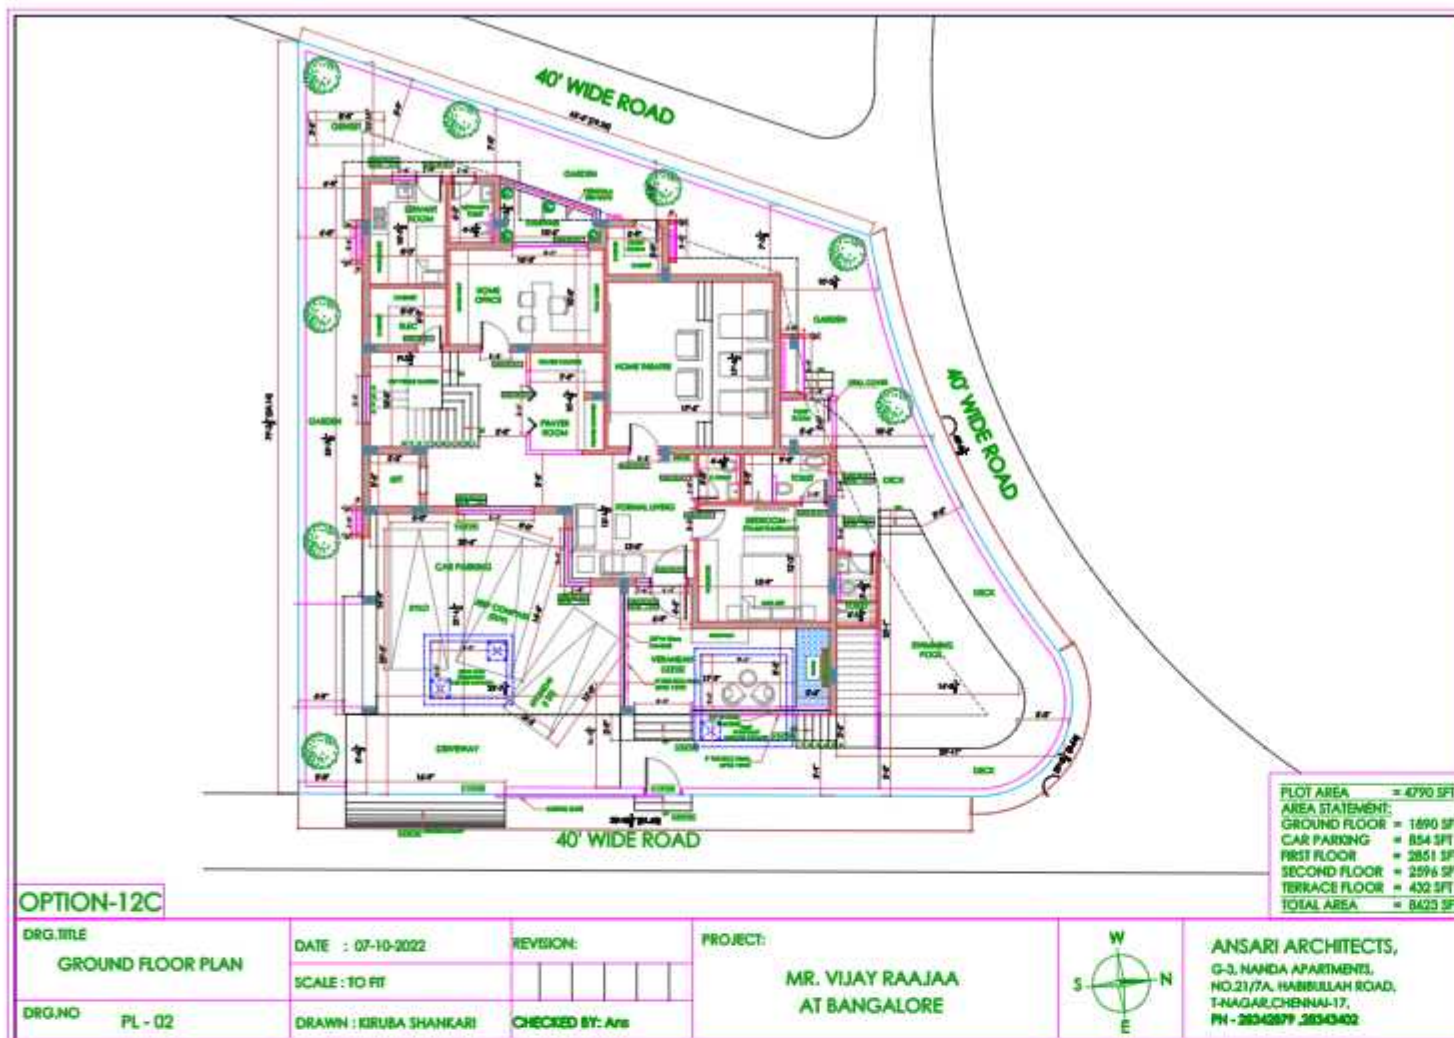

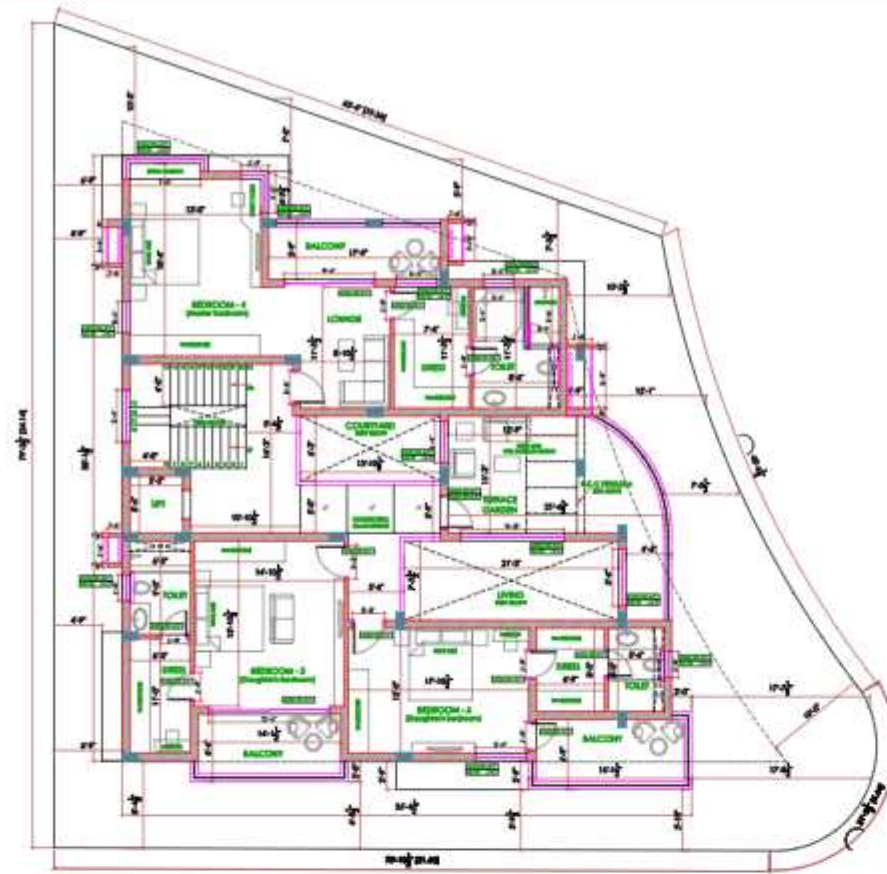


OPTION-12C

DRG. TITLE	DATE : 07-10-2022	REVISION:	PROJECT:
SECOND FLOOR PLAN	SCALE : TO FIT		MR. VIJAY RAAJAA AT BANGALORE
DRG. NO	DRAWN : KIRUBA SHANKARI	CHECKED BY: Ans	ANSARI ARCHITECTS, G-3, NANDA APARTMENTS, NO.21/7A, HAMBULLAH ROAD, T-NAGAR, CHENNAI-17, PH - 98542879, 98543402
PL - 04			

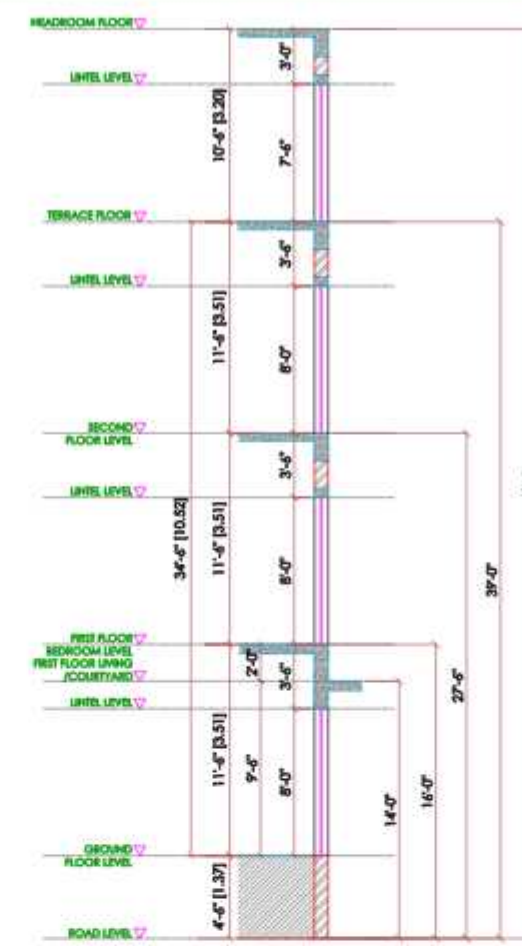


DRG. TITLE	DATE : 07-10-2022	REVISION:	PROJECT:
LEVEL DRAWING	SCALE : TO FIT		MR. VIJAY RAAJAA AT BANGALORE
DRG. NO	DRAWN : KIRUBA SHANKARI	CHECKED BY: Ans	ANSARI ARCHITECTS, G-3, NANDA APARTMENTS, NO.21/7A, HAMBULLAH ROAD, T-NAGAR, CHENNAI-17, PH - 98542879, 98543402
PL-01			

- Site is slightly odd shaped
- Setback of 7' - 10' is maintained all around the building from site
- Client was sure not to violate so was maintained properly with only permitted violations
- Client wanted a balance between formal, informal and recreational spaces.
- They also wanted interesting green spaces, connecting spaces, etc.,
- Skylight presence in the toilets for natural light to enter
- Next to scheme plans spaces are made welcoming, warmer, cozy etc., in interior stages of design.

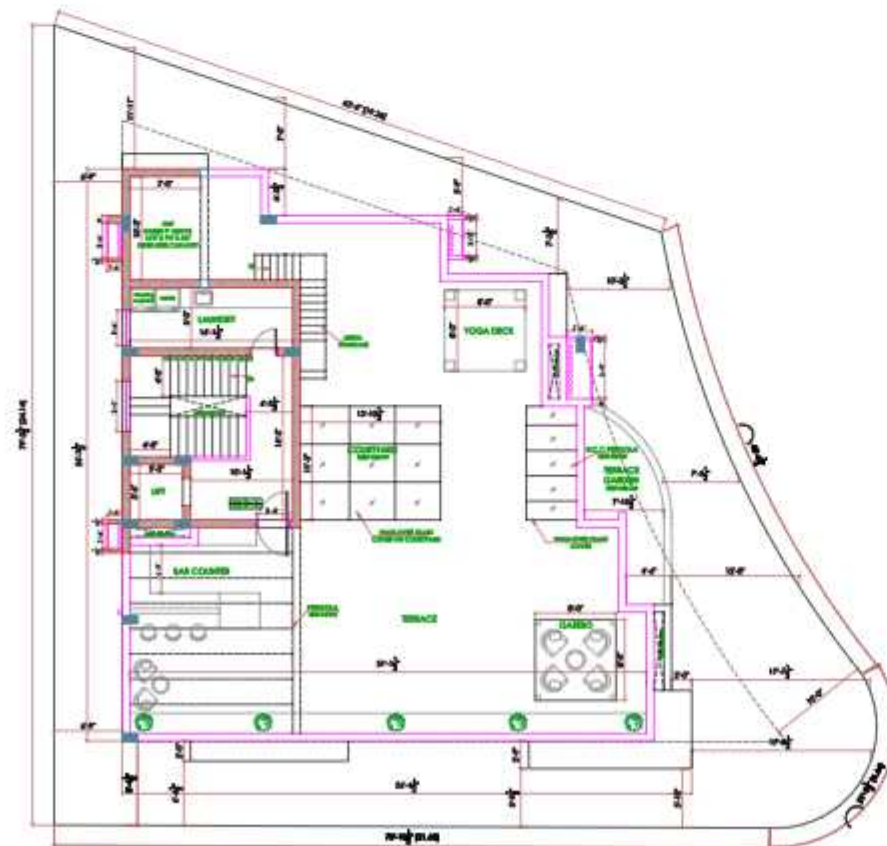

OPTION-12C

DRG. TITLE	DATE : 07-10-2022	REVISION:	PROJECT:
TERRACE FLOOR PLAN	SCALE : TO FIT		MR. VIJAY RAAJAA AT BANGALORE
DRG. NO	DRAWN : KIRUBA SHANKARI	CHECKED BY: Ans	ANSARI ARCHITECTS, G-3, NANDA APARTMENTS, NO.21/7A, HAMBULLAH ROAD, T-NAGAR, CHENNAI-17, PH - 98542879, 98543402
PL - 05			

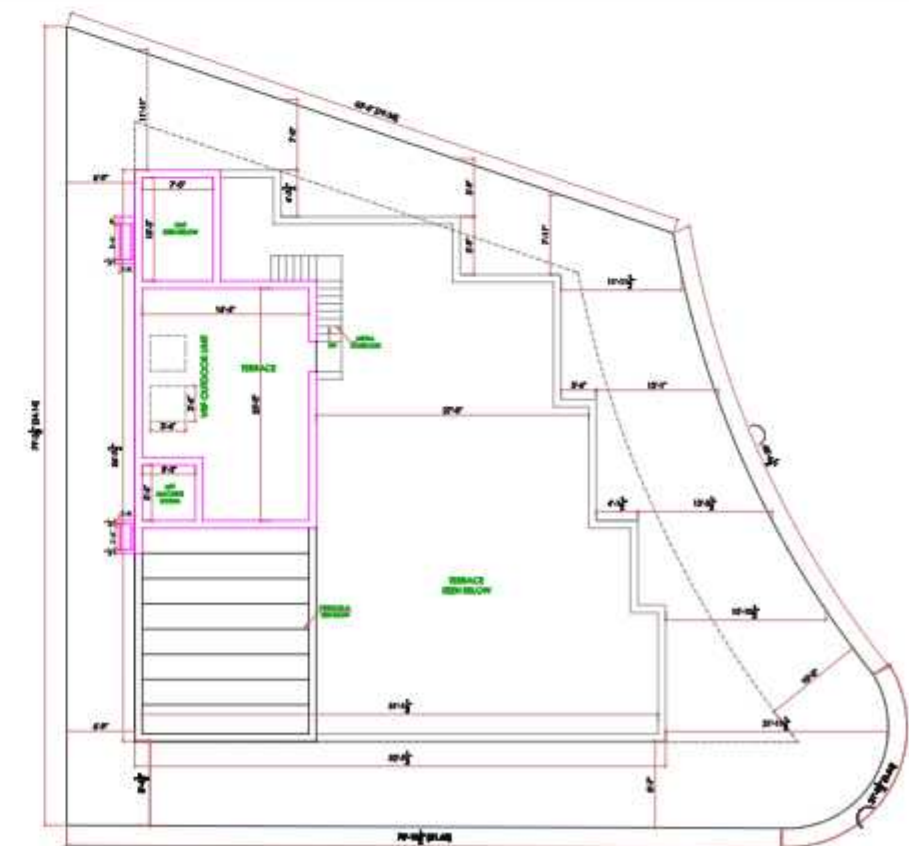

OPTION-12C

DRG. TITLE	DATE : 07-10-2022	REVISION:	PROJECT:
OHT PLAN	SCALE : TO FIT		MR. VIJAY RAAJAA AT BANGALORE
DRG. NO	DRAWN : KIRUBA SHANKARI	CHECKED BY: Ans	ANSARI ARCHITECTS, G-3, NANDA APARTMENTS, NO.21/7A, HAMBULLAH ROAD, T-NAGAR, CHENNAI-17, PH - 98542879, 98543402
PL - 06			

MR.ANANDHAKUMAR

AT SAIDAPET - CLIENT BRIEF

Plot Area 1539 Sq. ft

Stilt + 3

GROUND FLOOR

- 3 Car Parking

- Servant room

- Servant's toilet

FIRST FLOOR (3BHK)

Rental Portion

- Living

- Dining

- Kitchen

- Utility

- 3 Bedrooms with toilet

SECOND FLOOR

- Foyer

- Living with balcony

- Puja attached to living

- Courtyard with stone seating

- Dining

- Open Island Kitchen

- Utility

- Compact Guest Bedroom

- with attached toilet

THIRD FLOOR

- 3 Bedrooms







- With Walk in Wardrobe




- And attached toilet

Existing Borewell to be retained

Lift provision mandatory.

Plans previously done for G+3 were revised to G+1 due to several reasons and which can be built in the future.

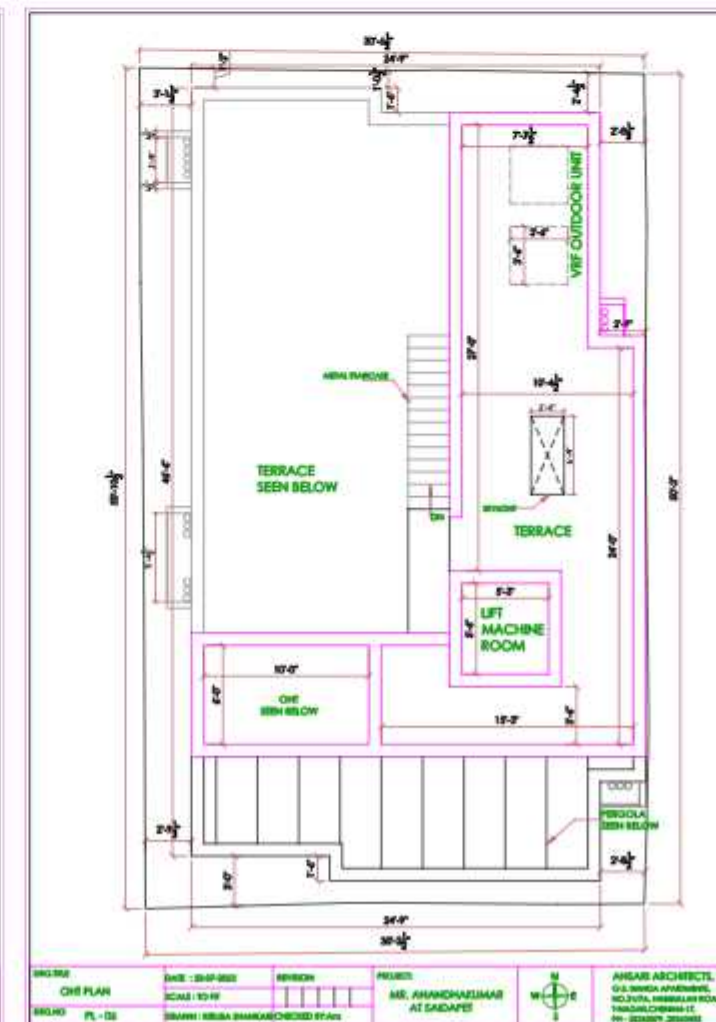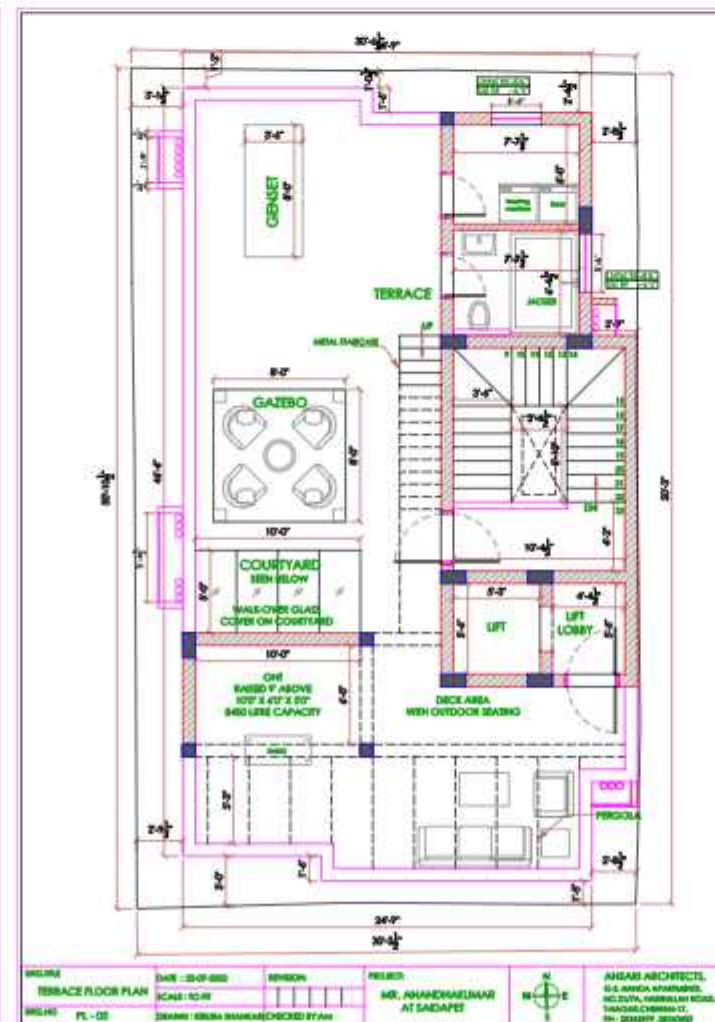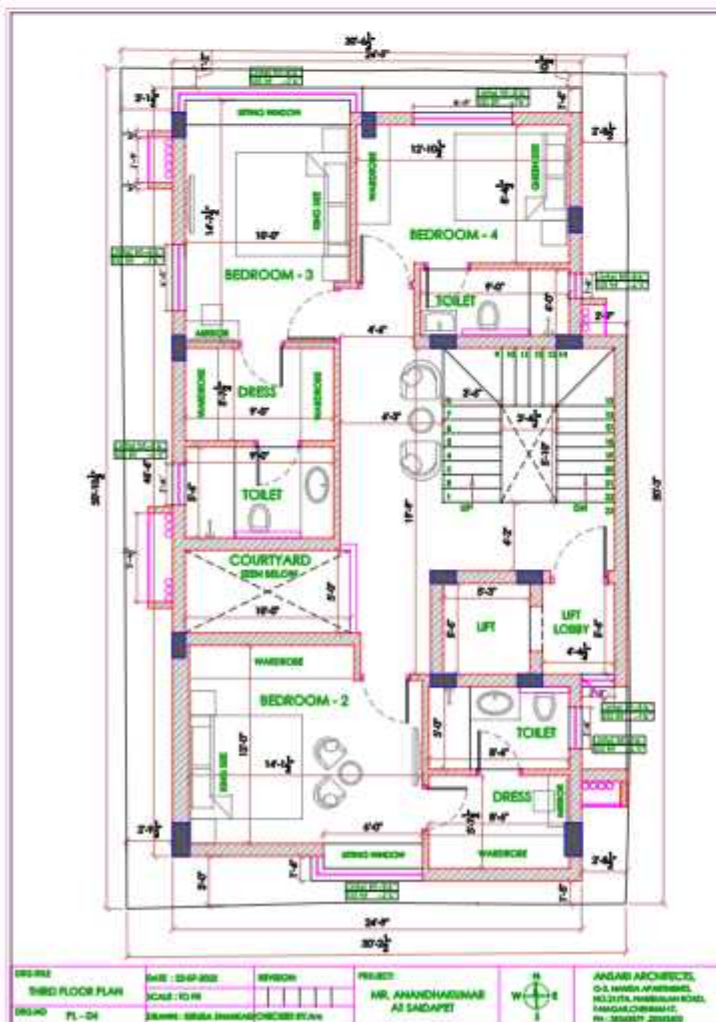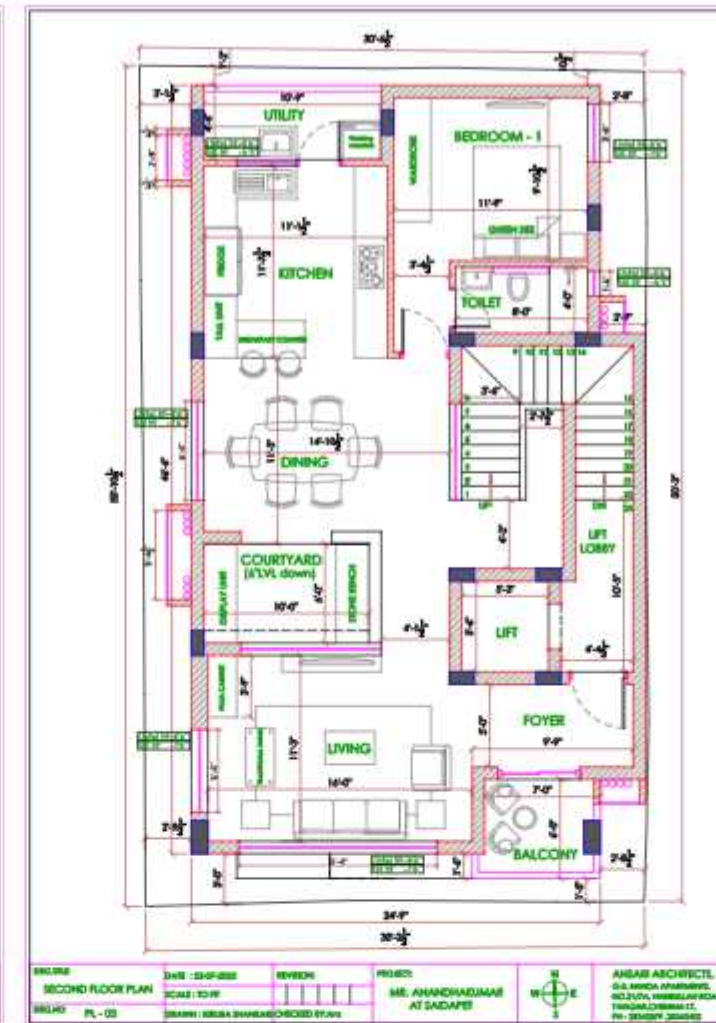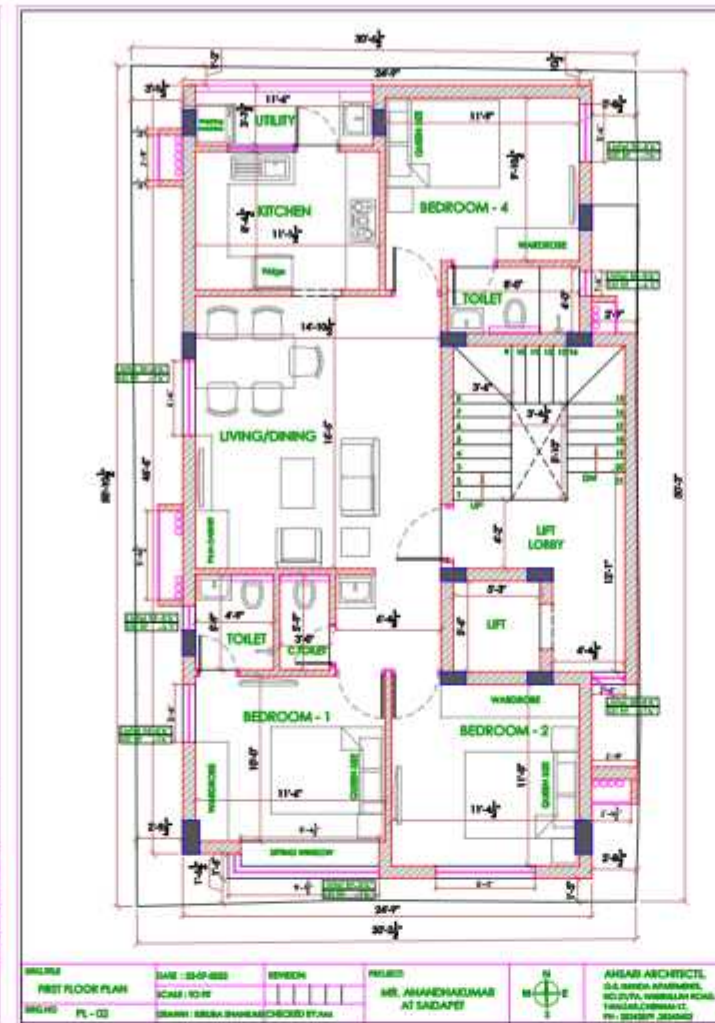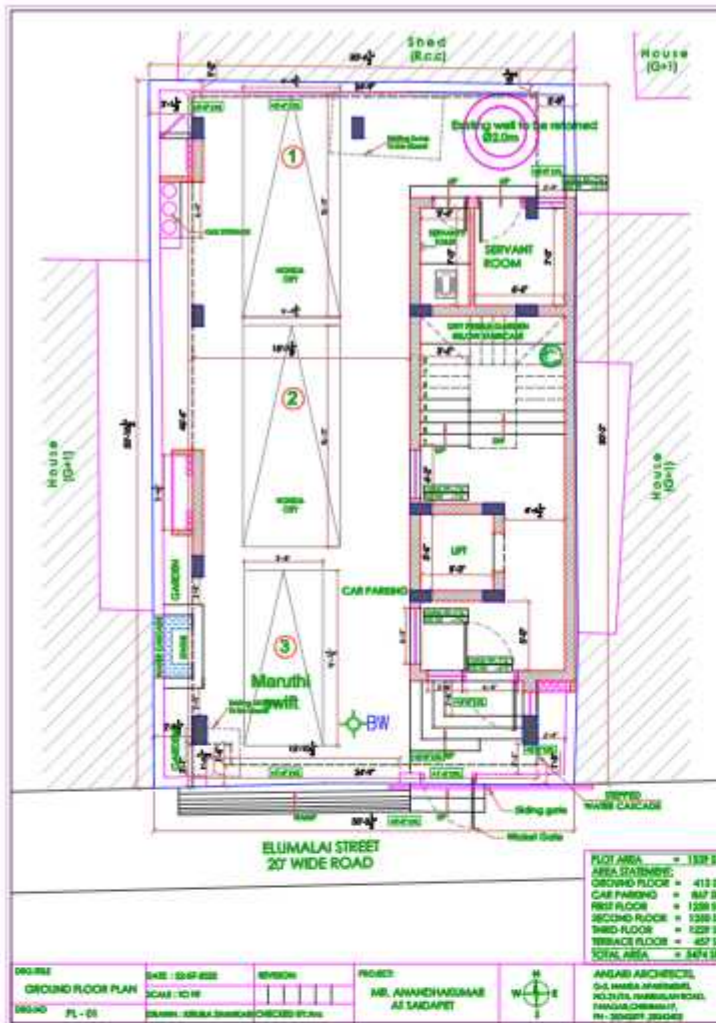

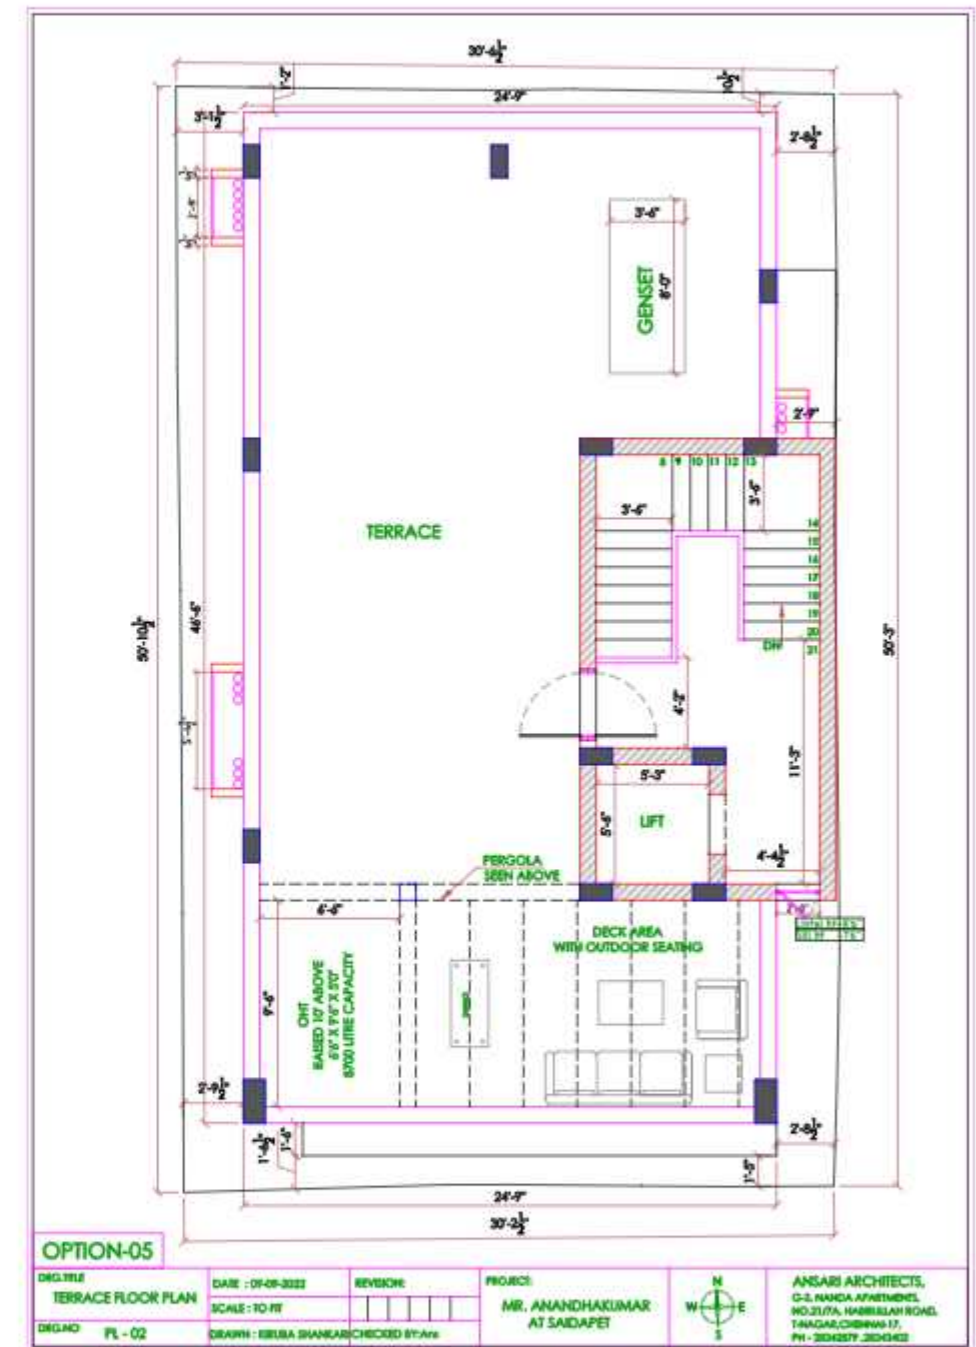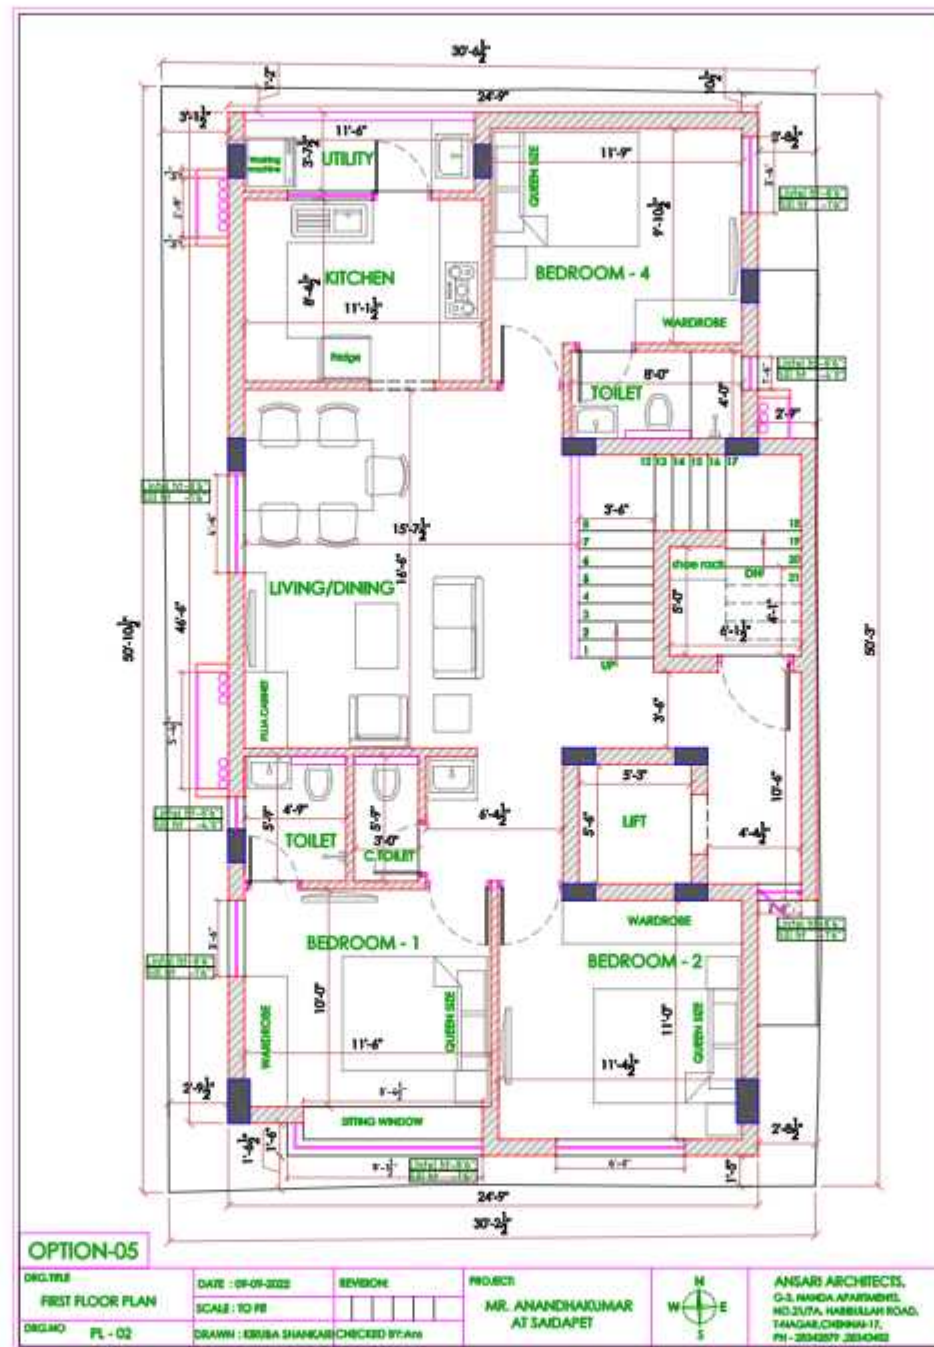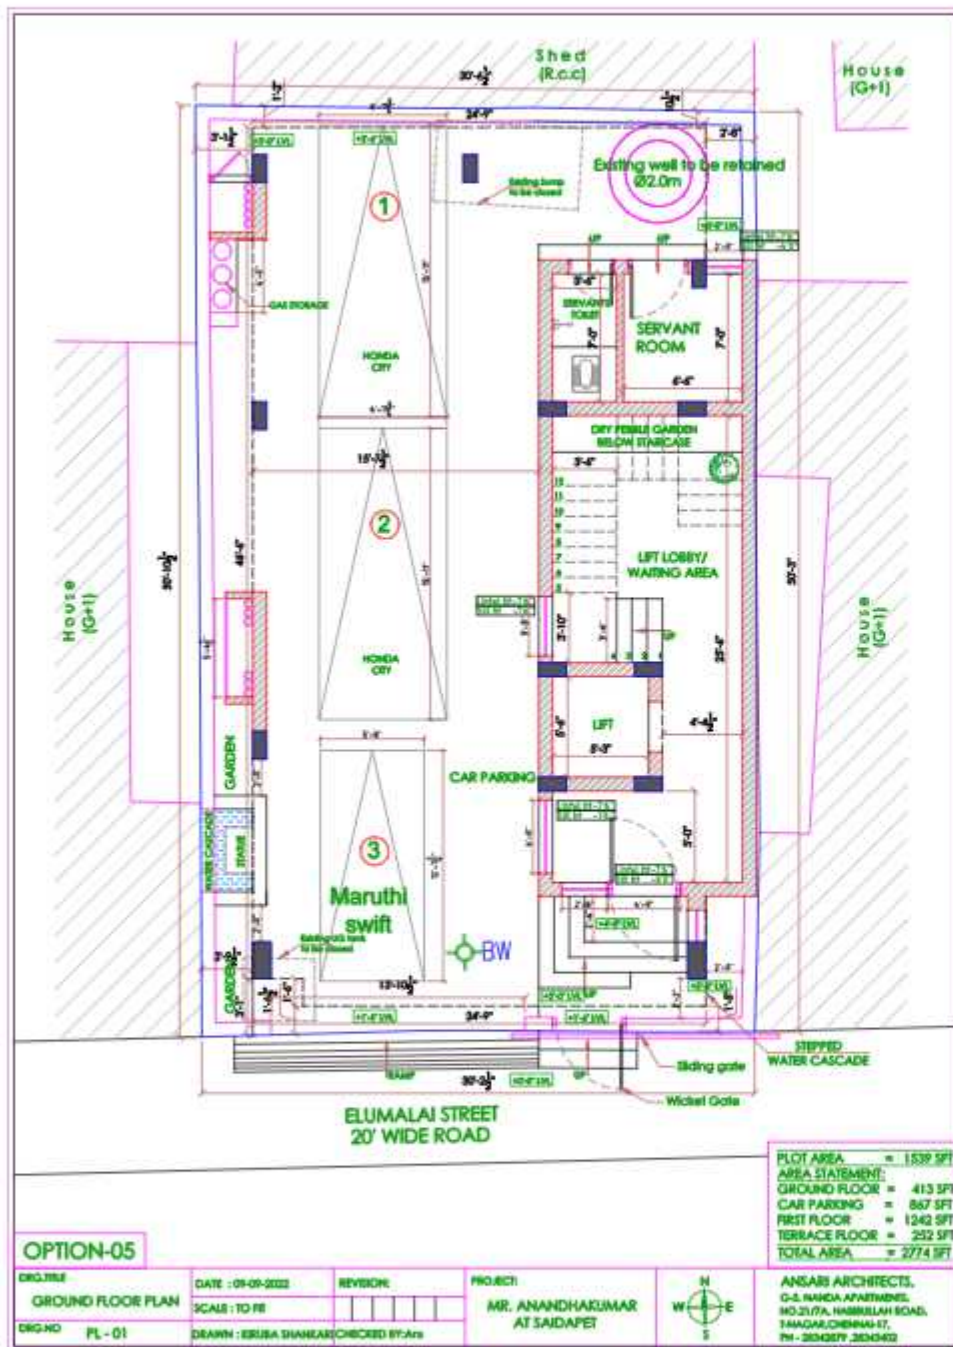

FINALISED OPTIONS

Mrs. VANSHIKA AT MADIPAKKAM - CLIENT BRIEF

Plot Area 2407 Sq. ft - G+1

GROUND FLOOR

- 2 Car Parking
- Foyer
- Living
- Dining
- Open Kitchen with Breakfast counter
- Utility
- Store room
- Courtyard with Sitout
- Small Bedroom with attached toilet
- Pooja room









FIRST FLOOR

- 2 Master Bedrooms
- With Walk in Wardrobe
- Attached Toilet
- Balcony
- Home Theatre

Plans can be tried even without home theatre in case of spaciousness

Sitting window mandatory in both the master bedrooms

Spacious bathrooms with bathtub.

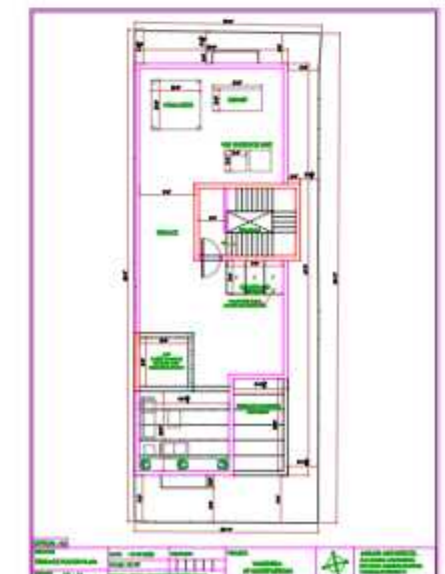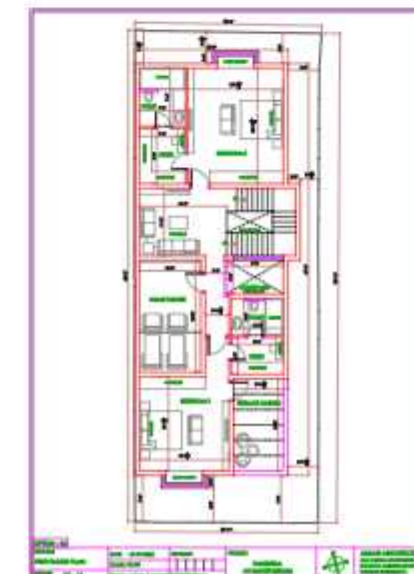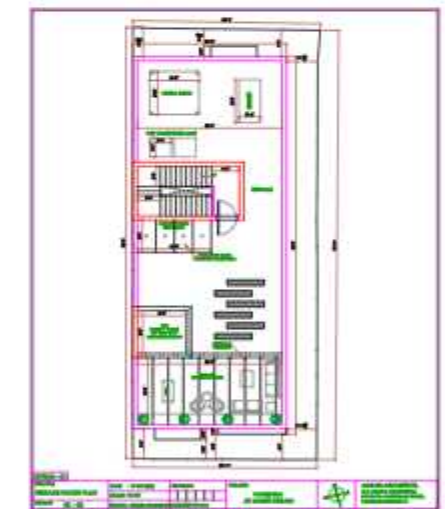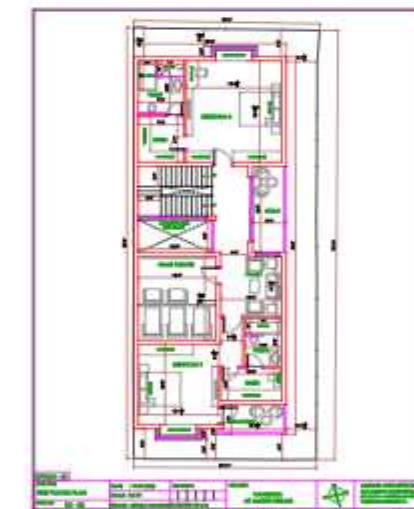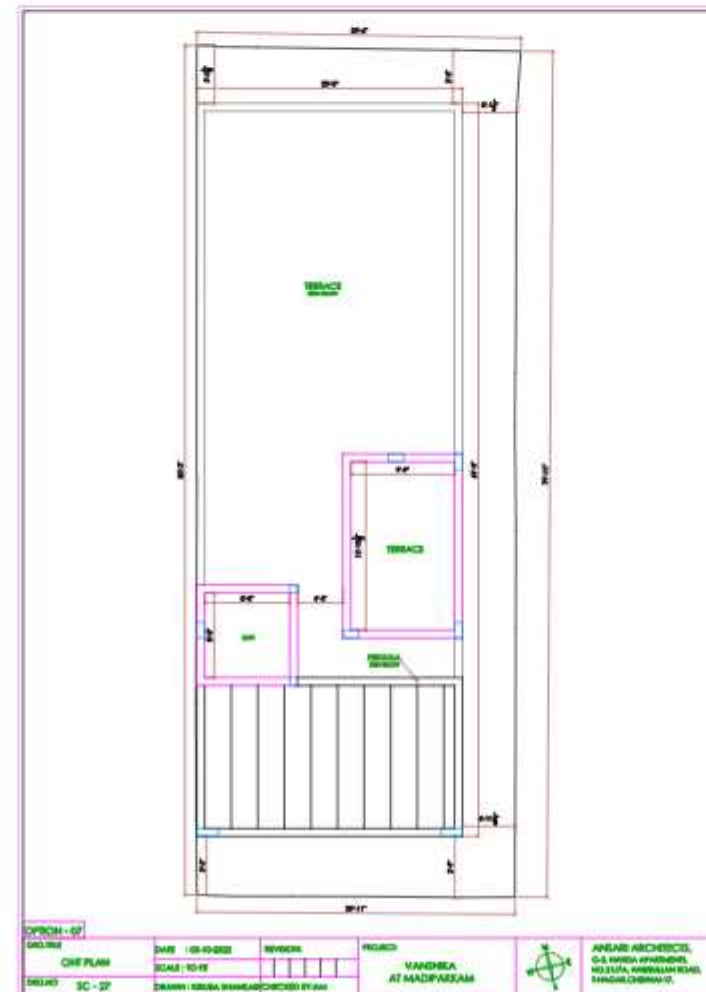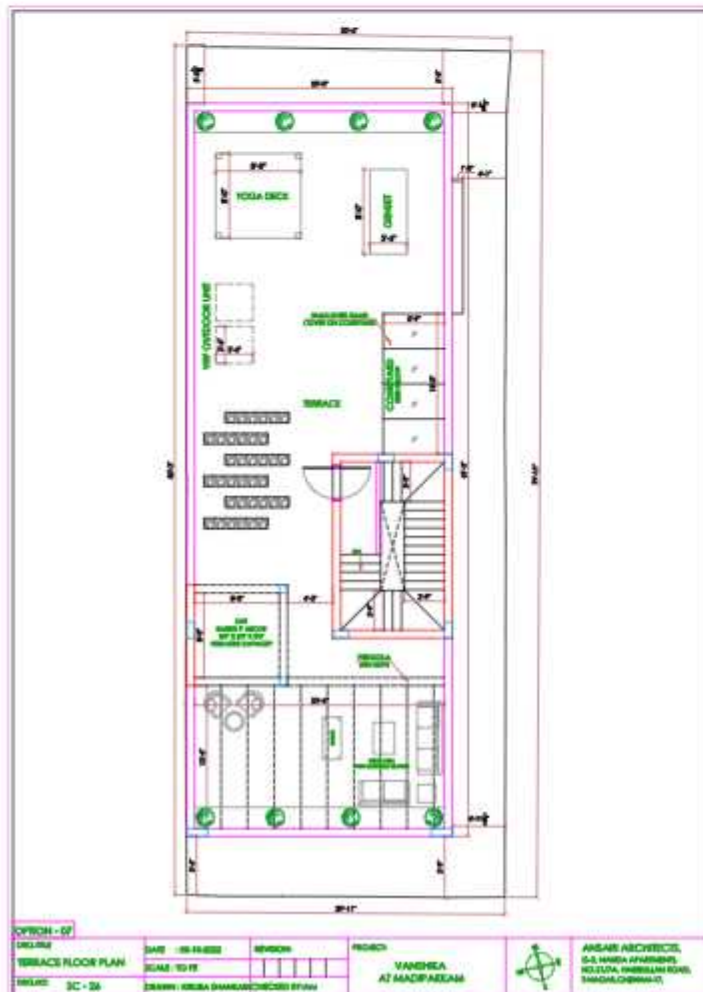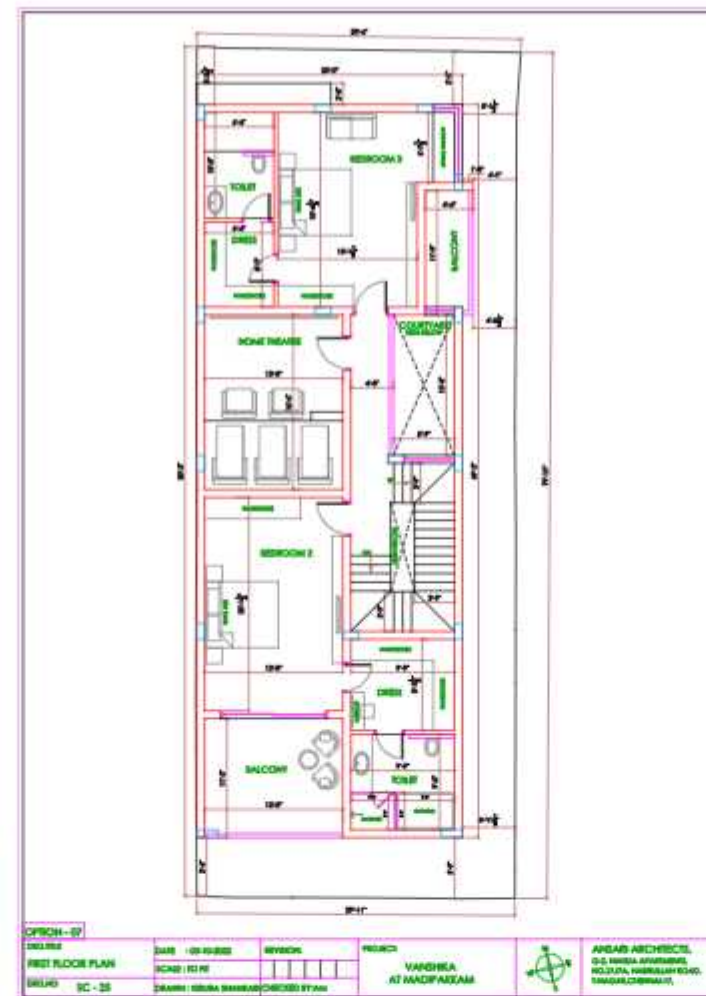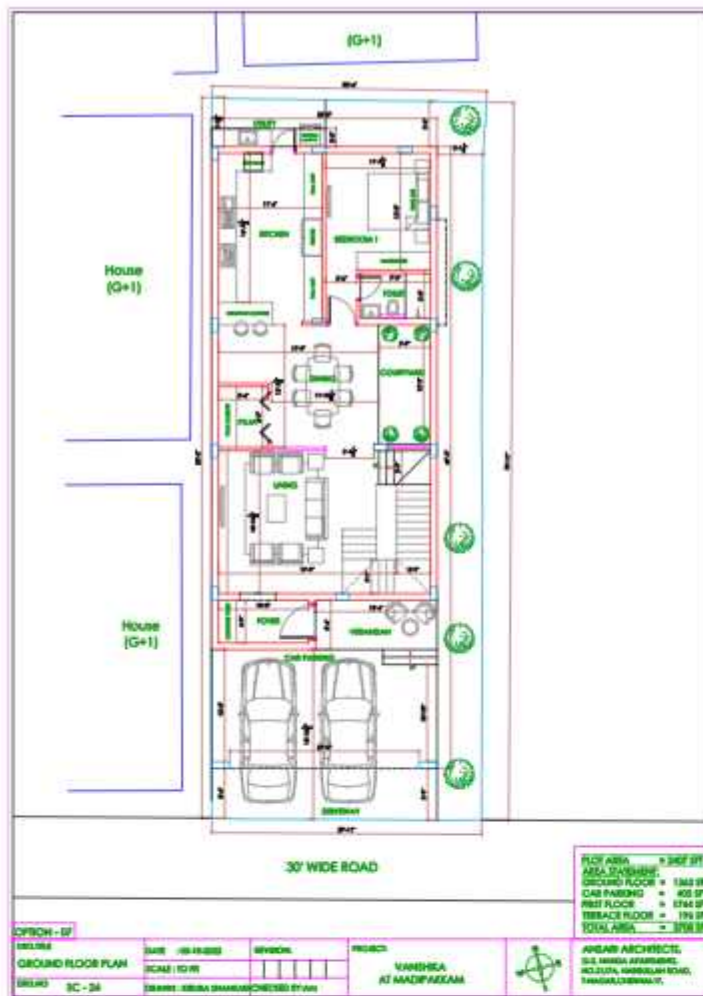

Plot Area 2289 Sq. ft
GROUND FLOOR

- Living
- Dining
- Kitchen
- Utility
- Common toilet
- Courtyard
- Pooja Room

- 2 Large Bedrooms
- With Walk in Wardrobe
- Attached Toilet
- Balcony

OPTION - 11B

GROUND FLOOR PLAN

SCALE: 10:1

DATE: 03-10-2022






DESIGN: SHUBA SHANKAR CHOCKKOTI AP/Ar

PROJECT: MUTHUSWAMY AT MAMBANAM

AREA SUMMARY:

- AREA SUMMARY = 10,000 SQ. FT.
- GROUND FLOOR = 4,000 SQ. FT.
- CAR PARKING = 1,200 SQ. FT.
- FIRST FLOOR = 1,513 SQ. FT.
- SECOND FLOOR = 1,485 SQ. FT.
- THIRD FLOOR = 287 SQ. FT.
- TOTAL AREA = 7,285 SQ. FT.

ANAND ARCHITECTS
 6/4, NORTON STREET, 1ST FLOOR, ANNAMALAI, MADURAI, TAMIL NADU, INDIA
 TEL: 0452-2555555, FAX: 0452-2555555

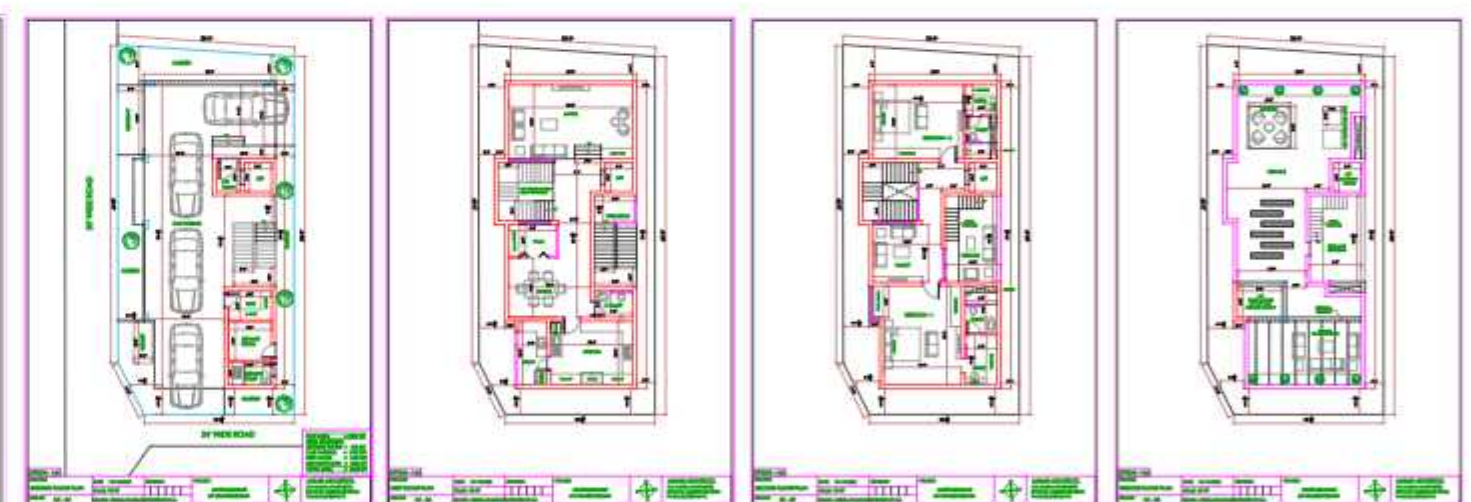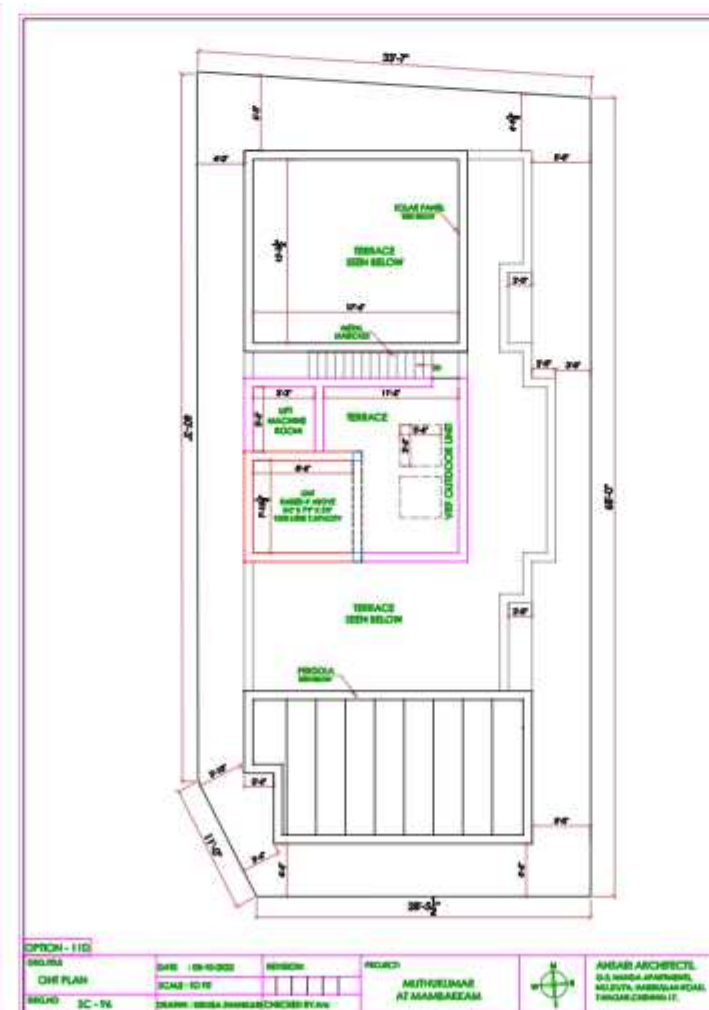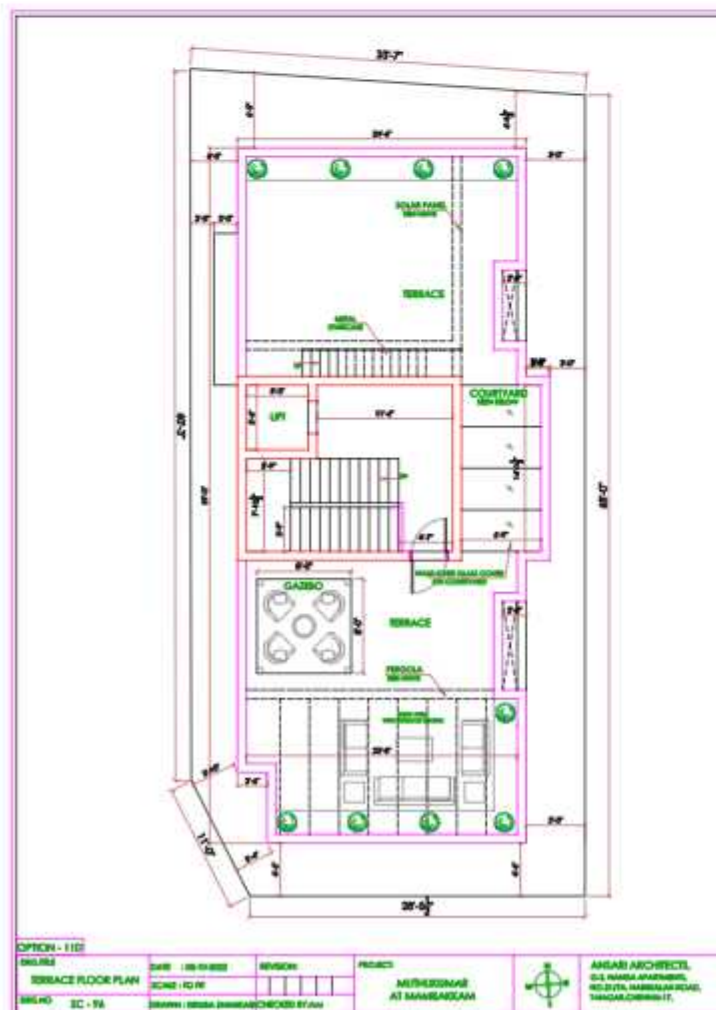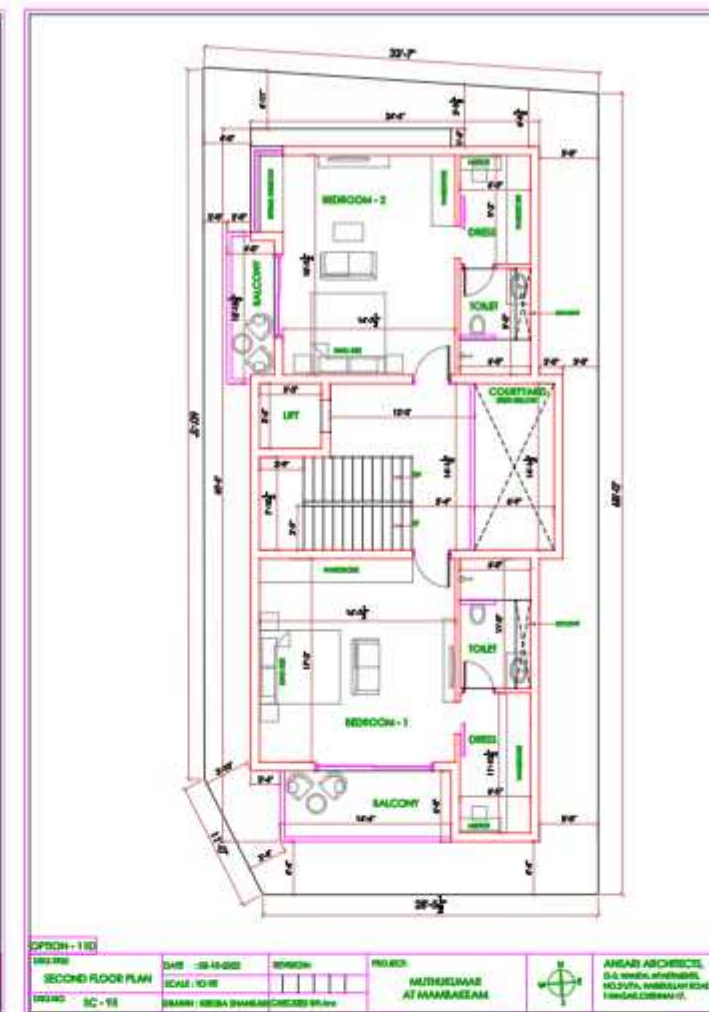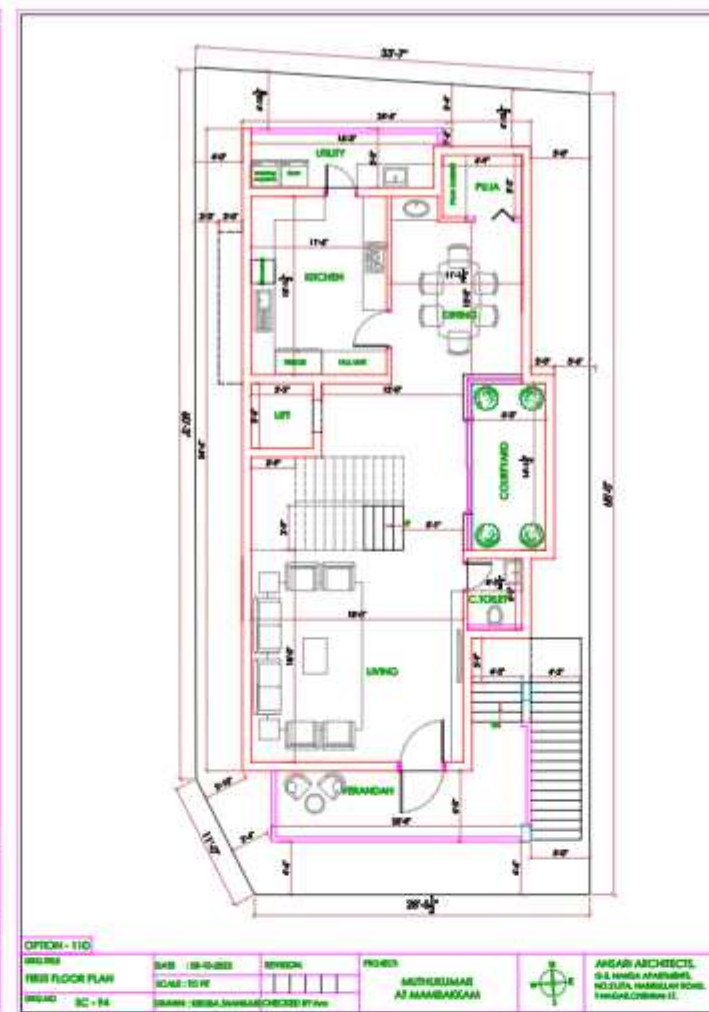

Mrs. SWAPNA PRATAP AT UTHANDI - CLIENT BRIEF

Plot Area 2550 Sq. ft

GROUND FLOOR (Individual house for Parents)













- 2 Car Parking
- Living cum Dining
- Kitchen
- Utility
- 2 Bedrooms with attached toilets





FIRST FLOOR

- Large Living
- Dining
- Open Kitchen with Breakfast counter
- Utility
- Bedroom with attached toilet and sitting window
- Courtyard

SECOND FLOOR

- Family
- Pooja Room
- 2 Bedrooms with attached toilets, 1 with balcony others with sitting window
- Lift mandatory.

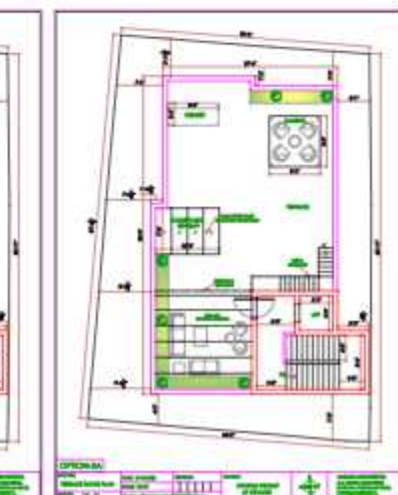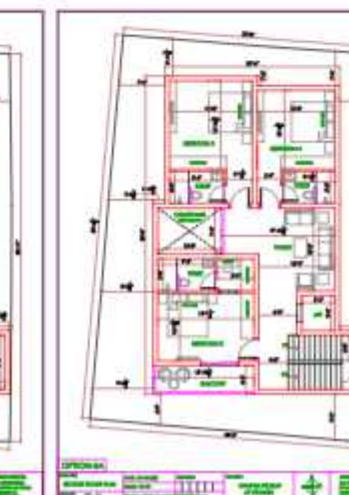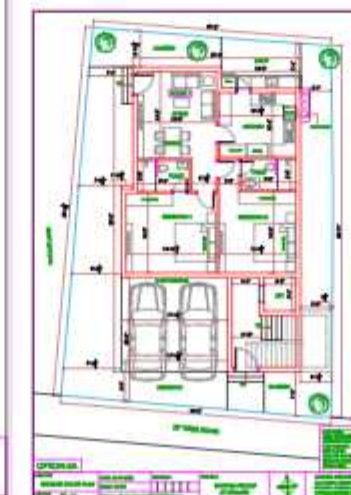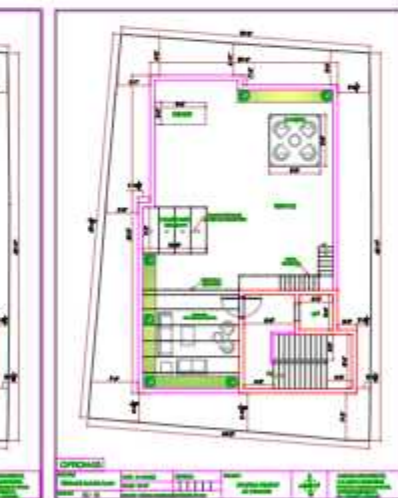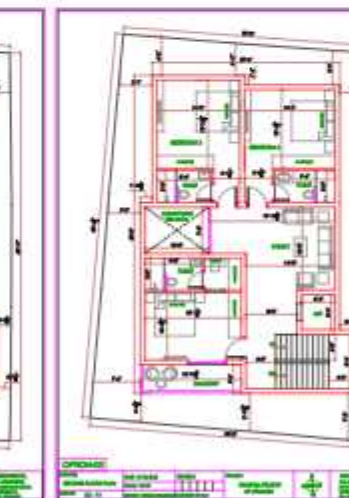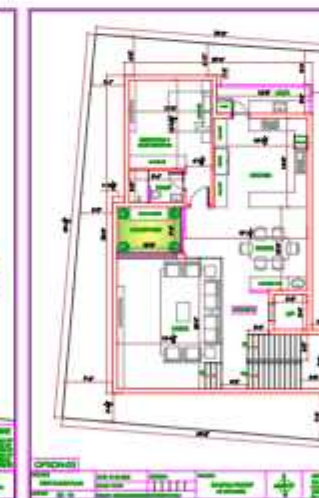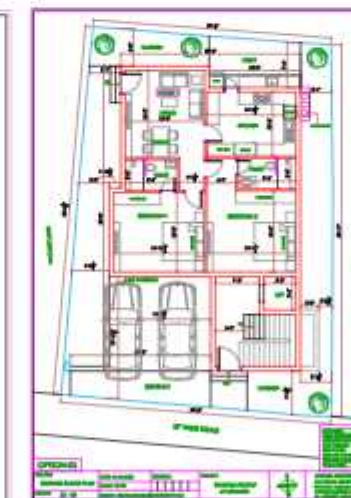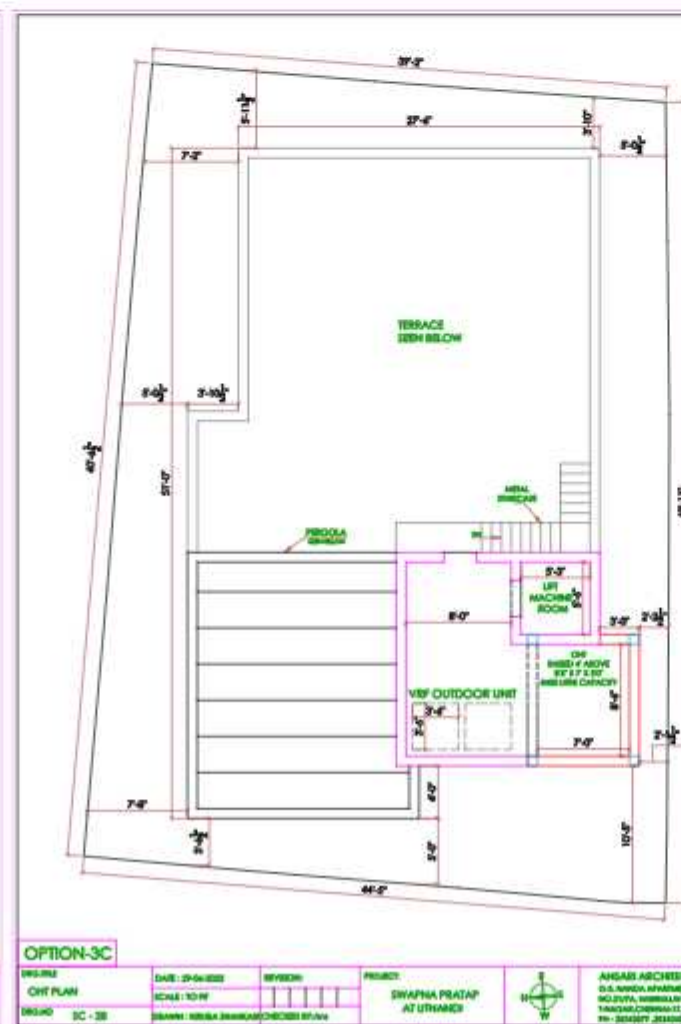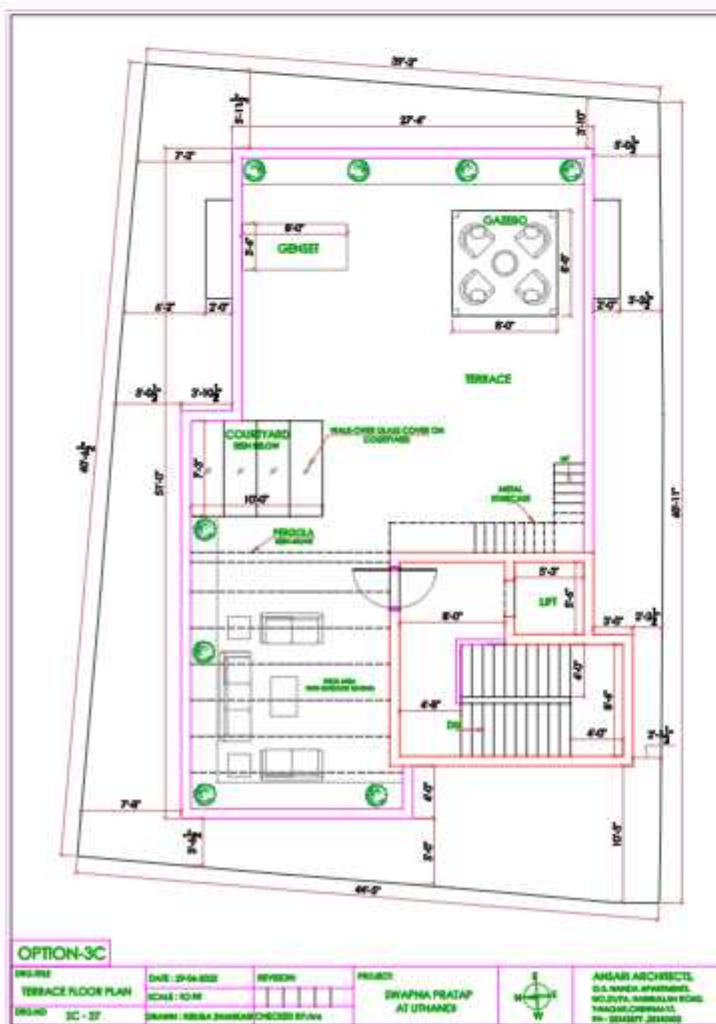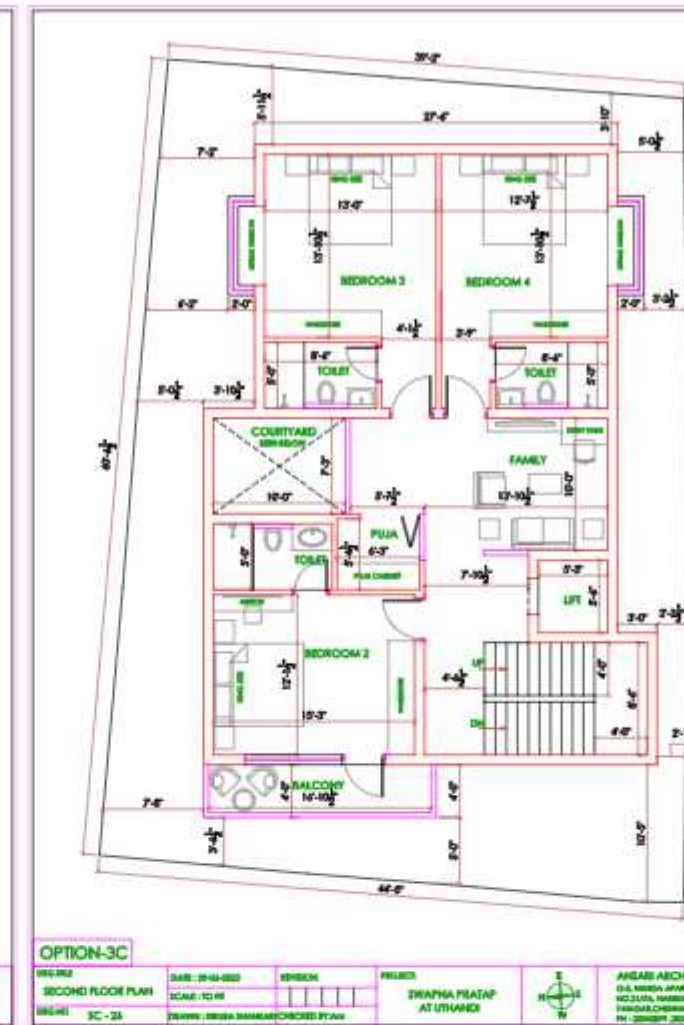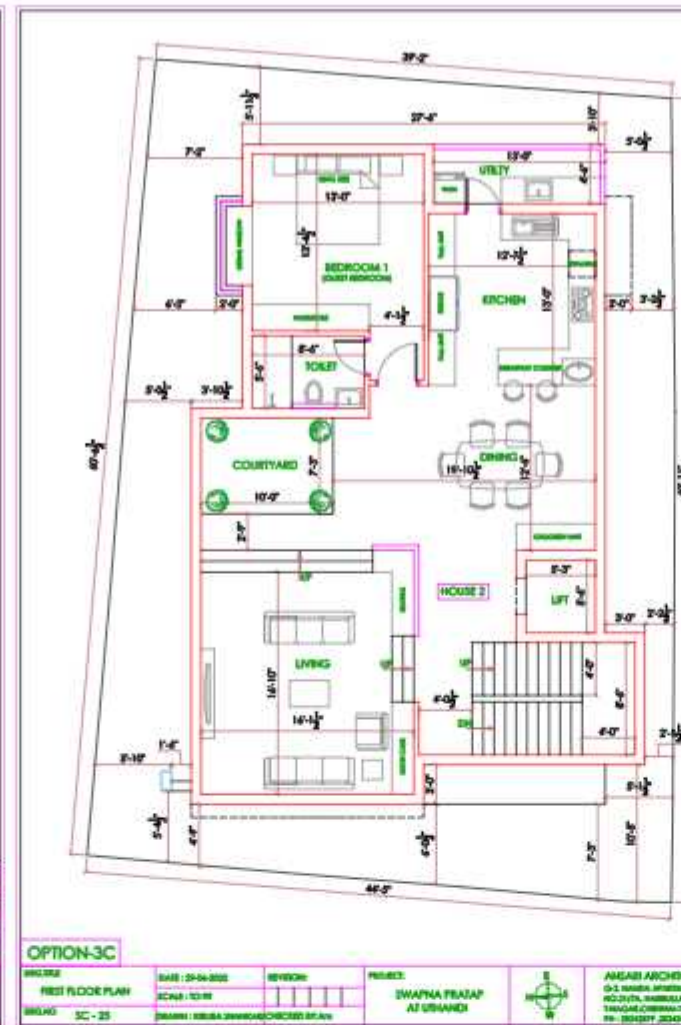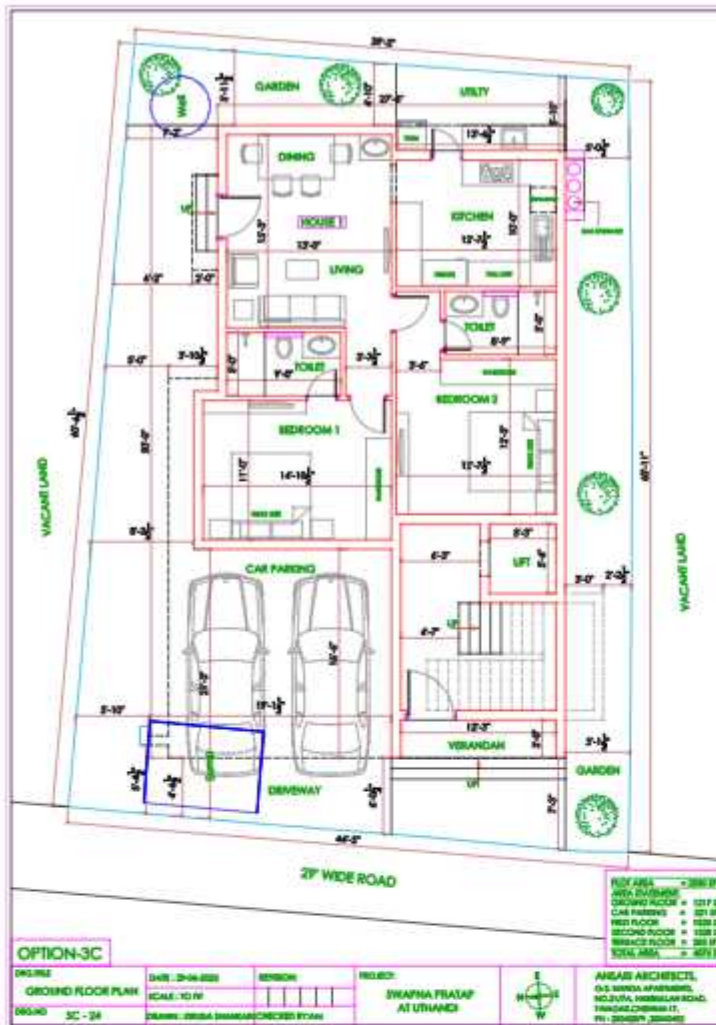

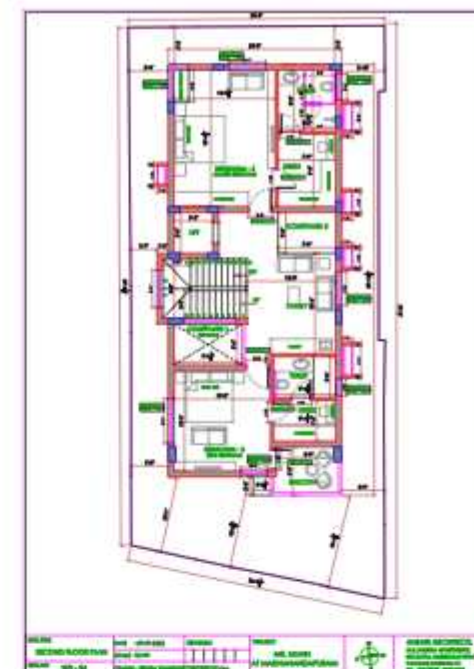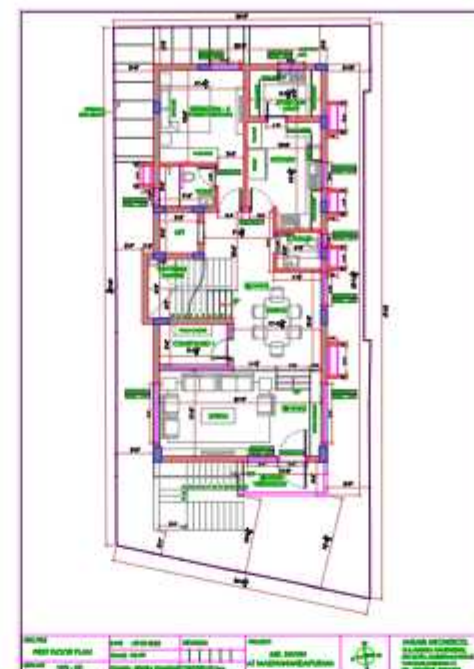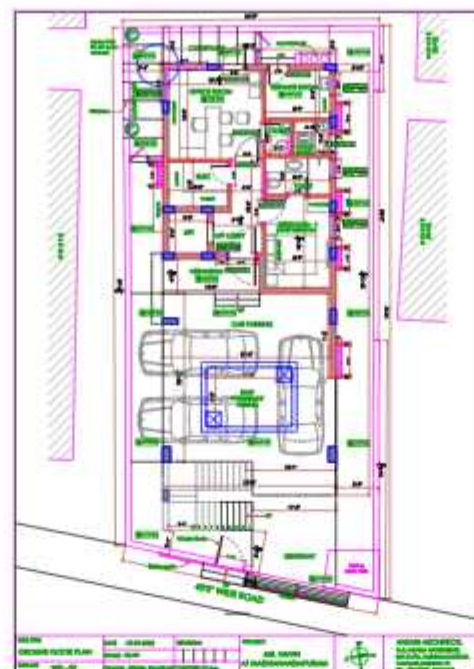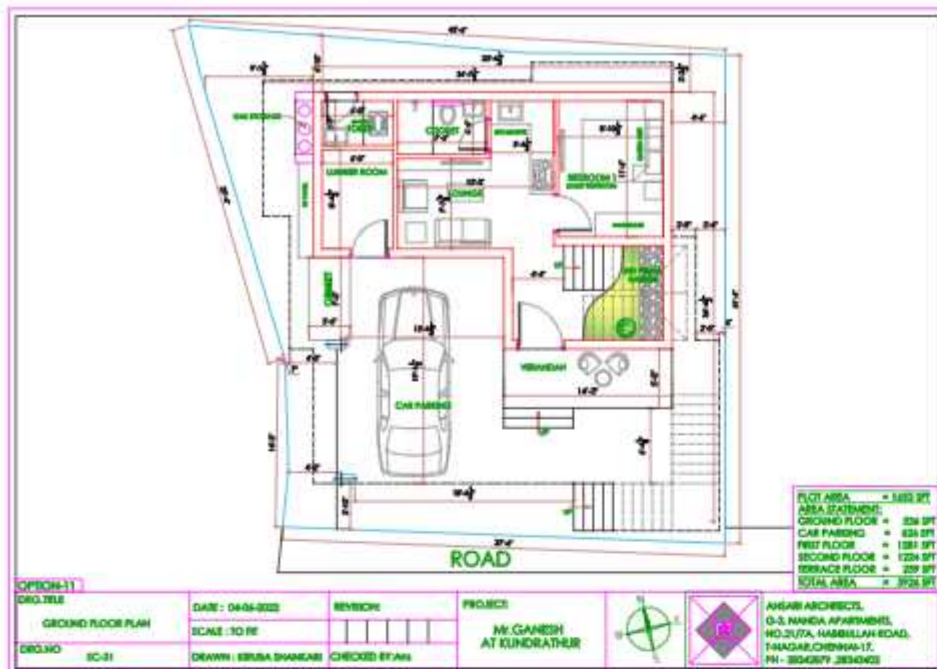

Mr. GANESH AT KUNDRATHUR

Plot Area 1653 Sq. ft
GROUND FLOOR







- Lounge
 - Store room
 - Kitchen
 - Common toilet
 - Bedroom
 - 1 Car Parking
- FIRST FLOOR**

- Foyer
 - Living
 - Dining
 - Kitchen
 - Utility
 - Bedroom with toilet
- SECOND FLOOR**


- Family
- Bedroom with toilet and walk in wardrobe
- Sitting window

Mr. NAVIN AT MADHANAN-DAPURAM


Scheme plans corrections

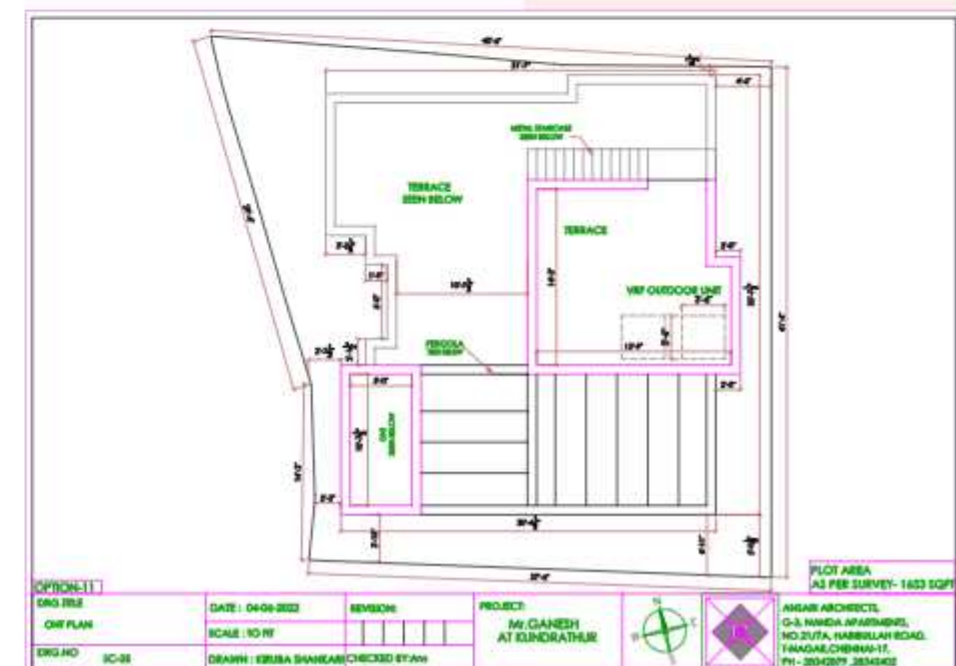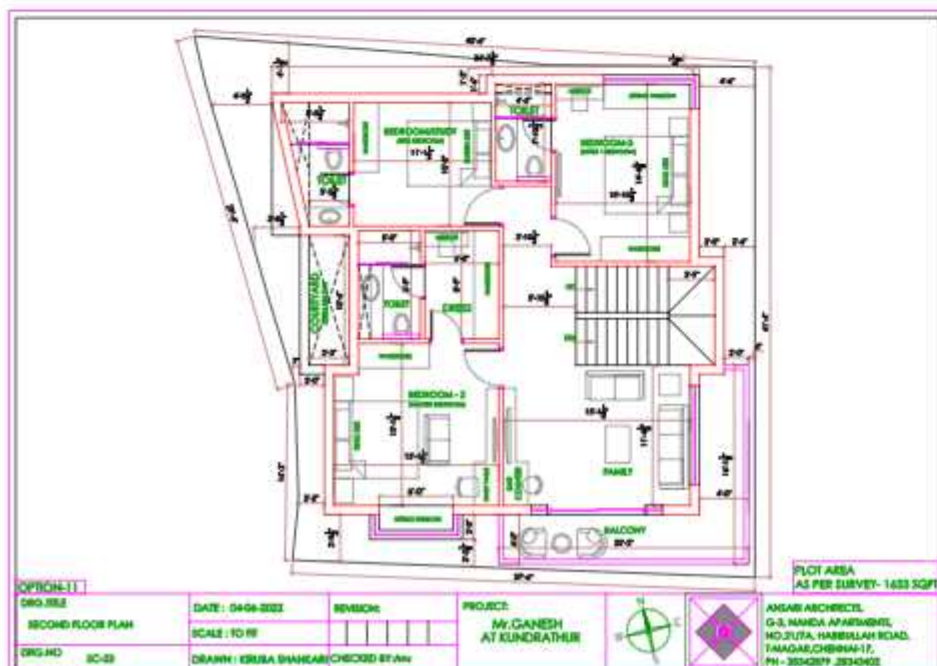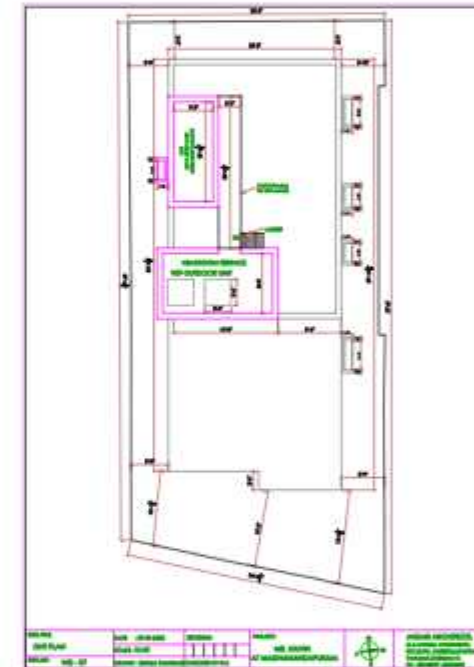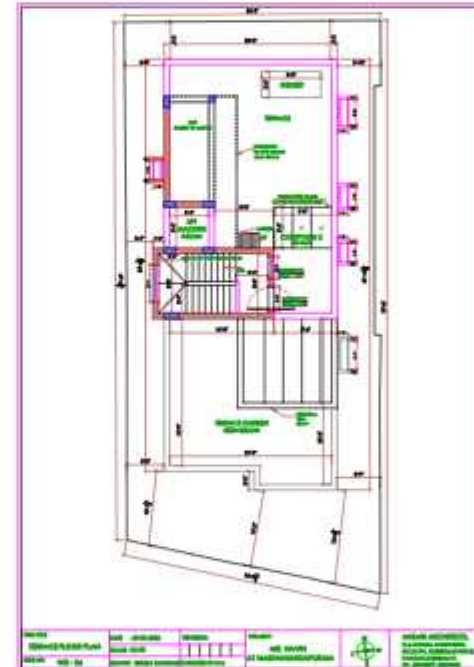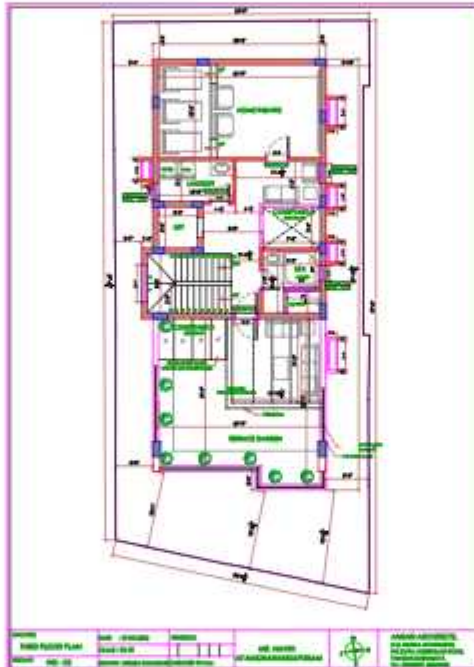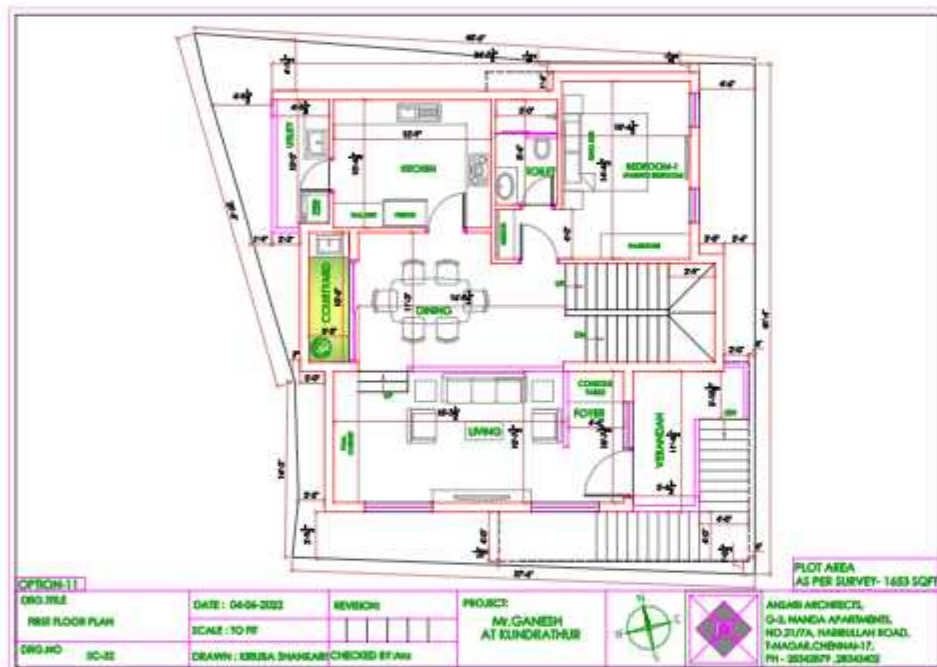

MR. PUGAZHENTHI AT IYYAPPANTHANGAL - Correcetions in the plan with columns, windows, ducts, sump etc.,

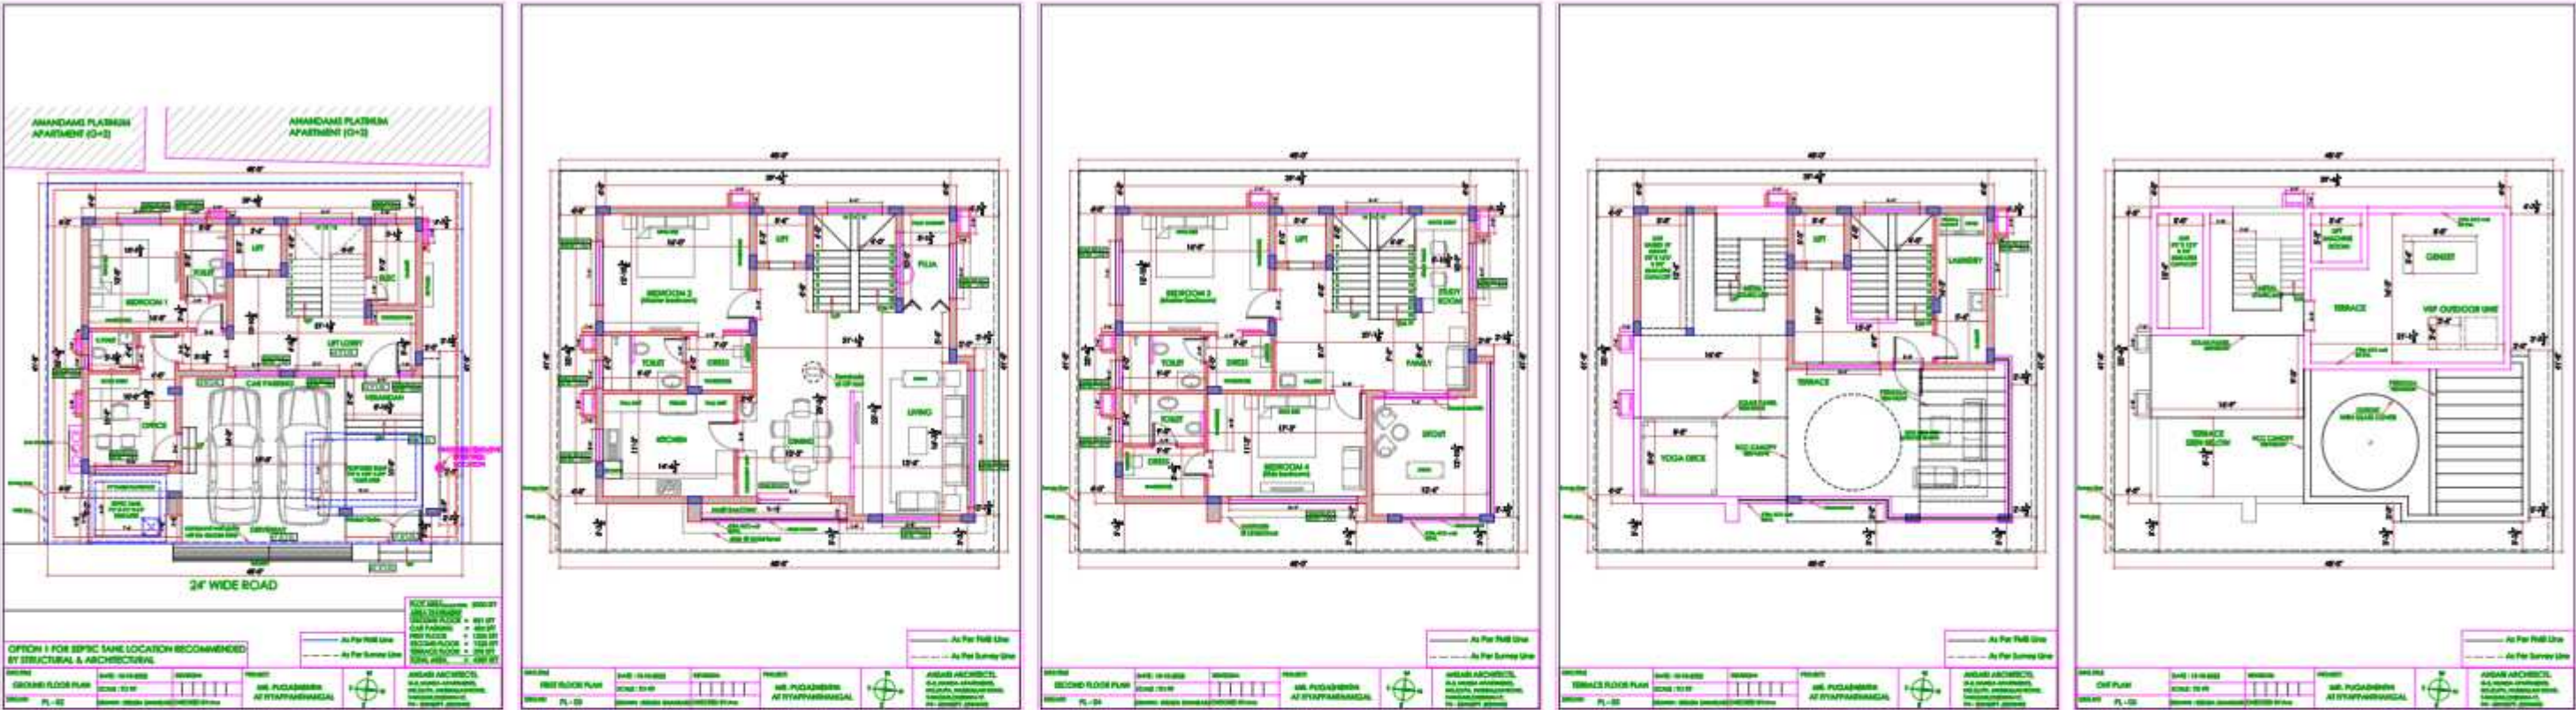

MR. RADHAKRISHNAN AT SIRKALI - Placement of windows, columns, levels, and other detailings.

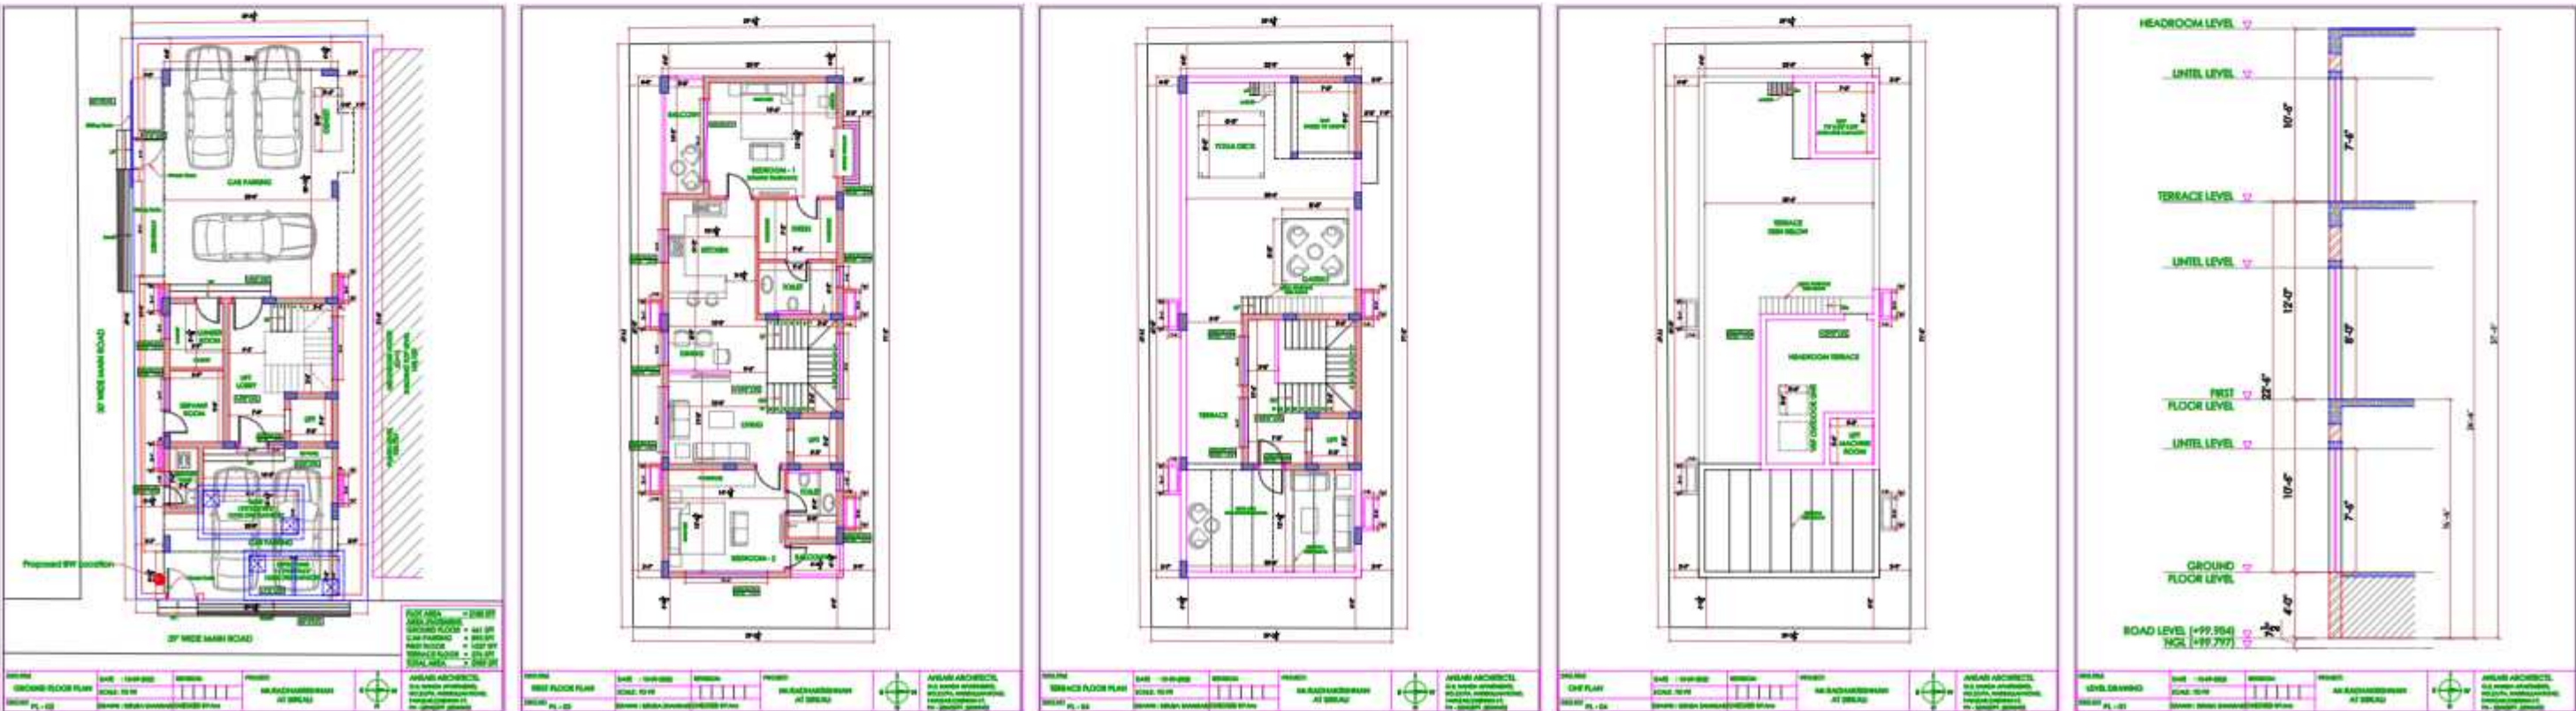

Mr. SAHUL'S RESIDENCE AT PUDUPAKKAM EXTERIOR ELEVATION



ANSARI
ARCHITECTS



MR. SAHUL'S RESIDENCE AT PUDUPAKKAM - CLIENT BRIEF

Plot Area 4466 Sq. ft
GROUND FLOOR

- 2 Car Parking
- Office Room
- Bedroom with attached toilet
- Common toilet

FIRST FLOOR

- Foyer
- Living
- Dining
- Kitchen
- Utility
- Bedroom with attached toilet
- Common toilet





COURTYARD

SECOND FLOOR

- Family
- 2 Bedrooms
- With Walk in Wardrobe
- Attached Toilet
- Terrace Garden
- Lift, Terrace Garden, Sit outs to be given.
- Exterior Staircase needed

EXTERIOR ELEVATION

- 4 options were given in case of design, color etc.,
- Client wanted not to increase the area so tried various options for the terrace garden area.
- Also wanted terrace garden to be simple and green, options were shown

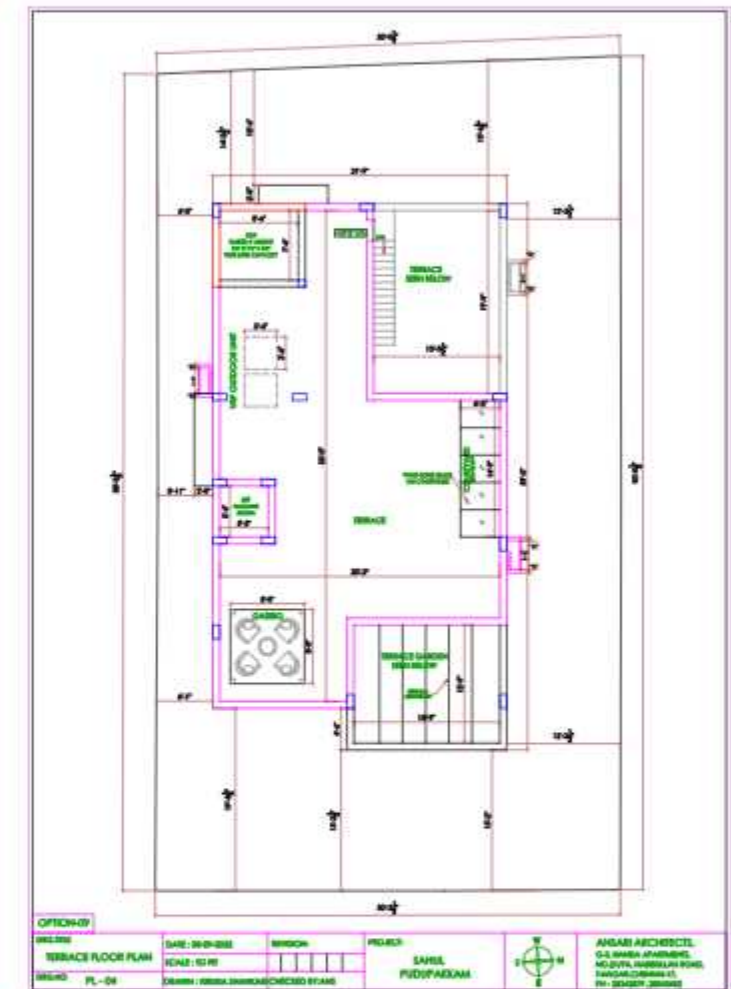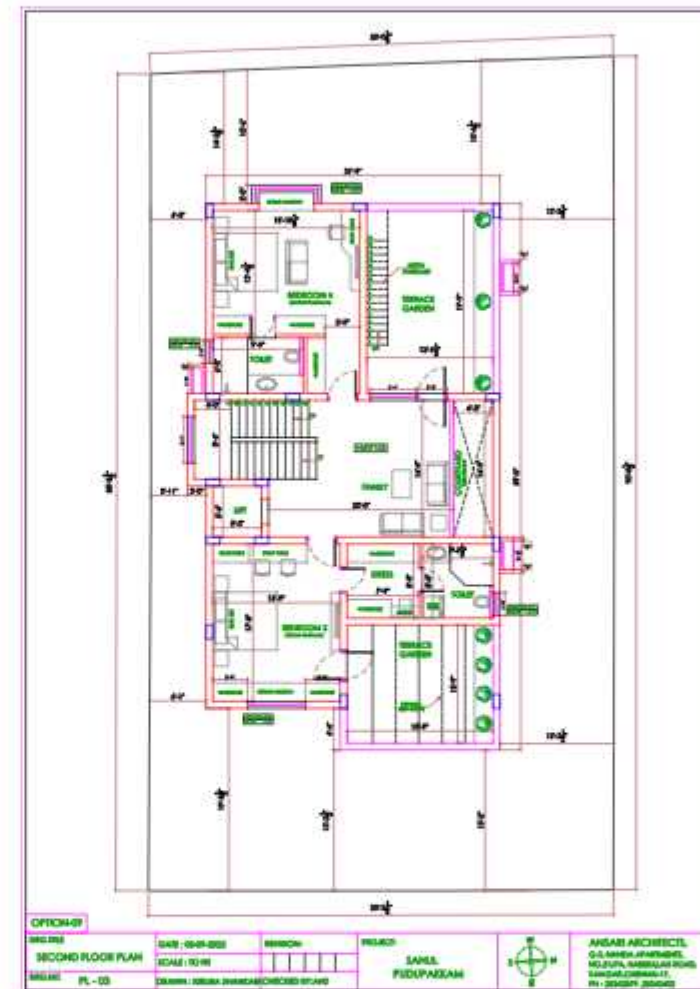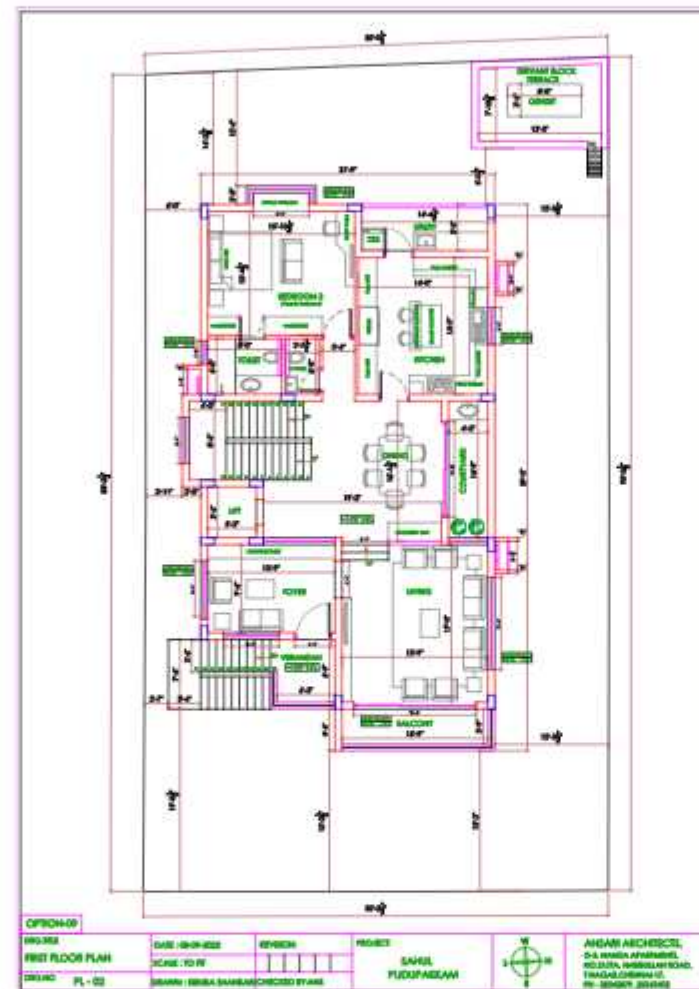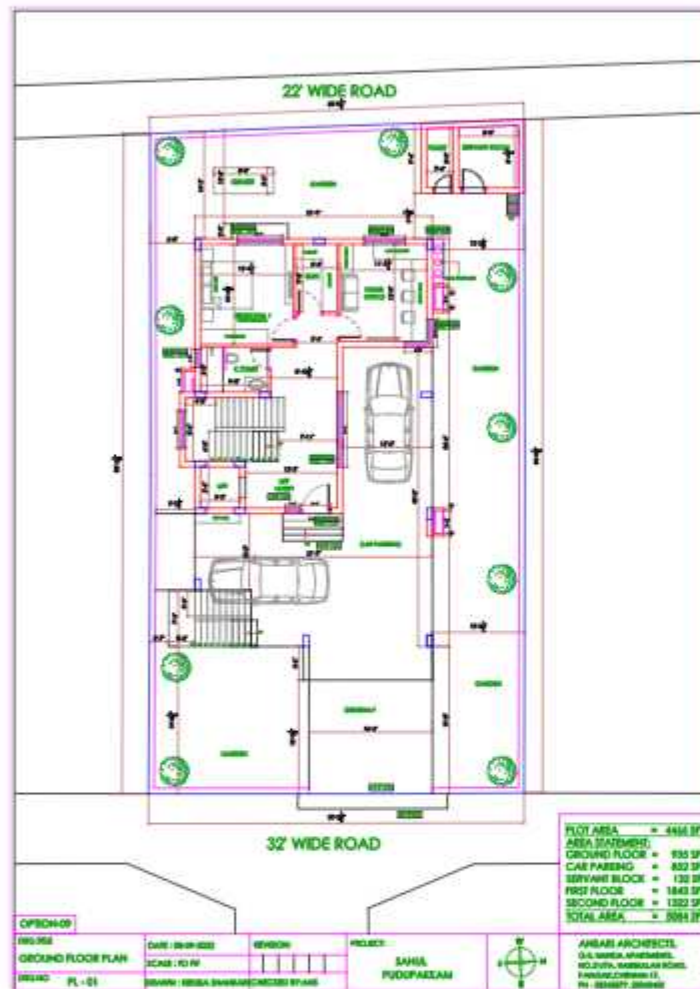

FINALISED OPTIONS

Mr. ANANDHAKUMAR AT MADIPAKKAM

Plot Area 2395 Sq. ft
GROUND FLOOR











- 3 Car Parking
 - Home Theatre
 - Small Gym
 - Common toilet
- FIRST FLOOR

- Living
- Dining
- Kitchen
- Utility
- Pooja room
- Bedroom with attached toilet
- Common toilet
- Courtyard
- Balcony

SECOND FLOOR

- Family
- 3 Bedrooms
- With Walk in Wardrobe
- Attached Toilet
- Balcony
- Terrace Garden
- Lift mandatory
- Laundry room

As per regulations, building is stuck to one side of the plot where the nearby building is also as high as it therefore designed accordingly incase of lighting, ventilation, privacy etc.,

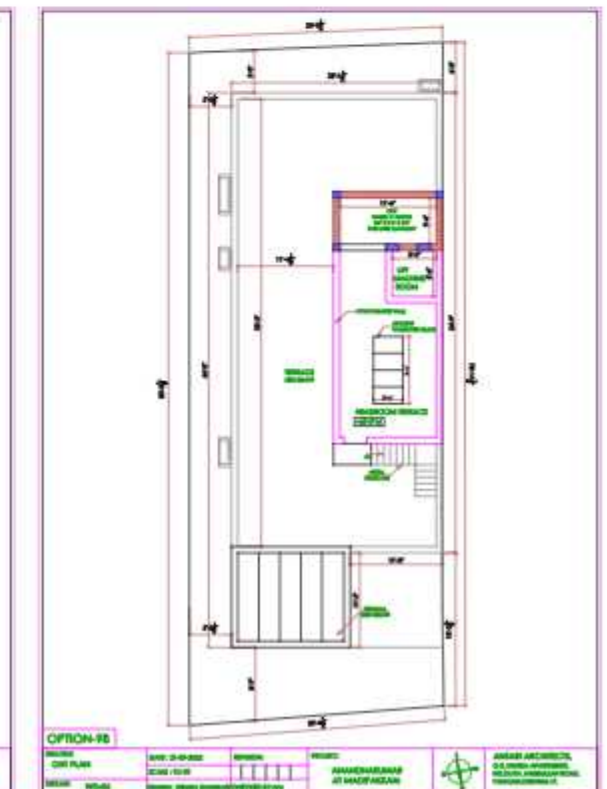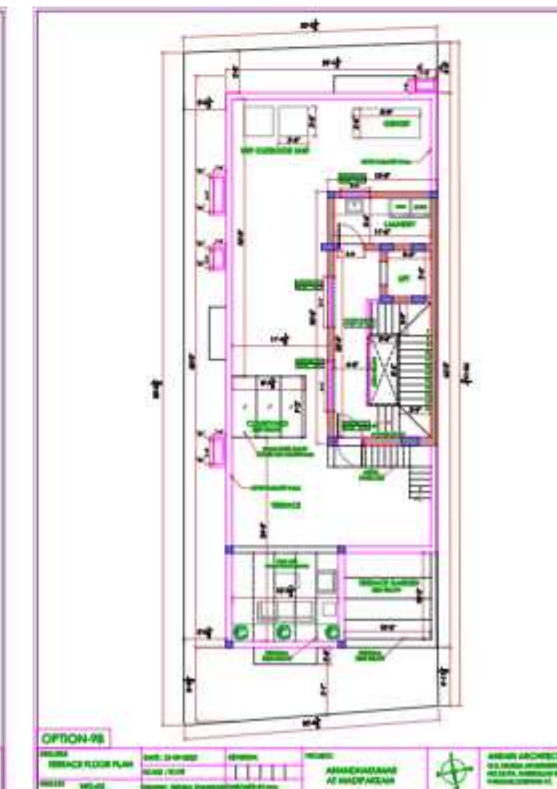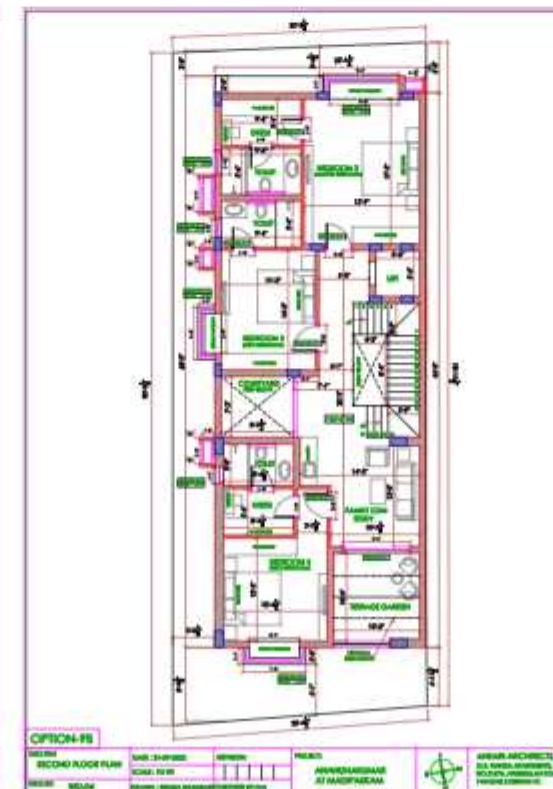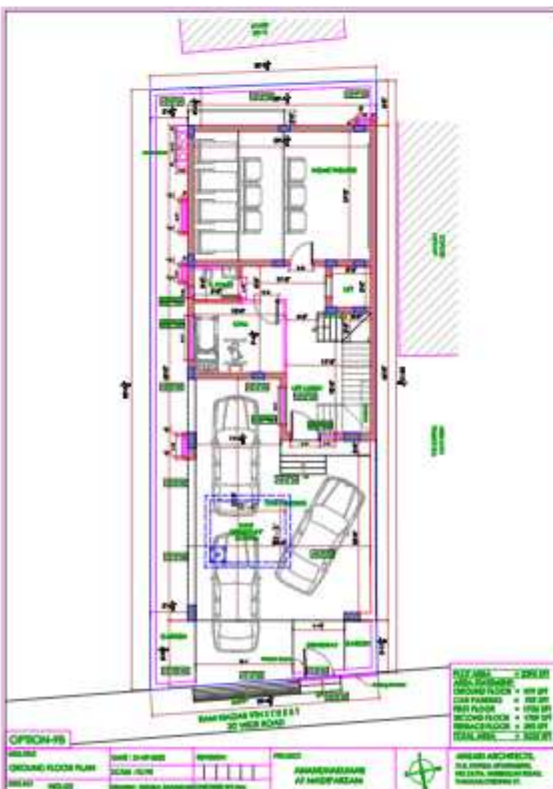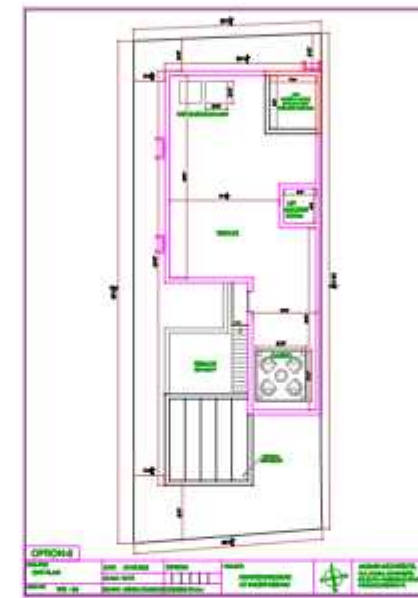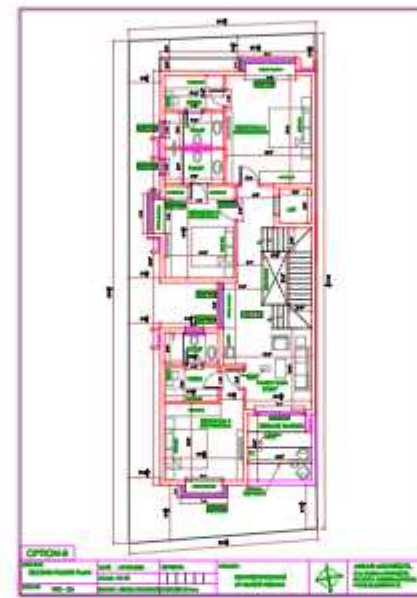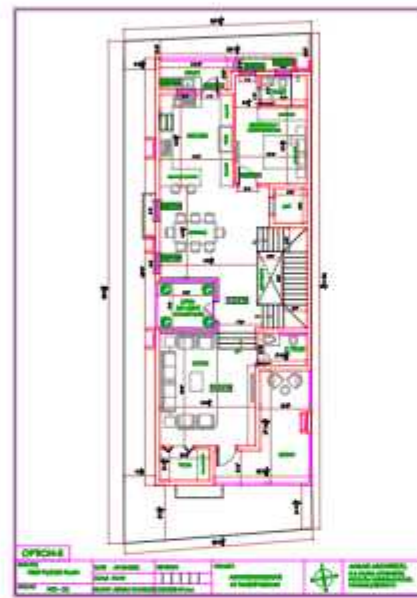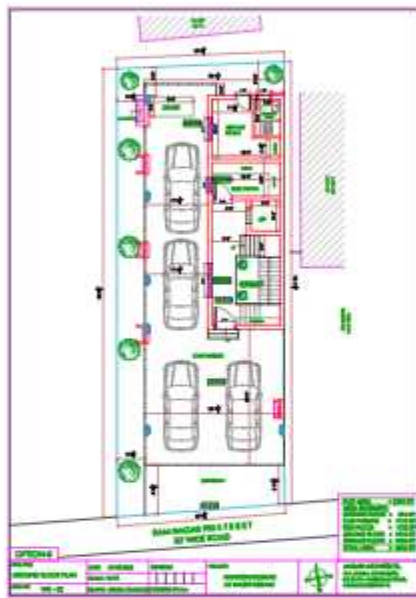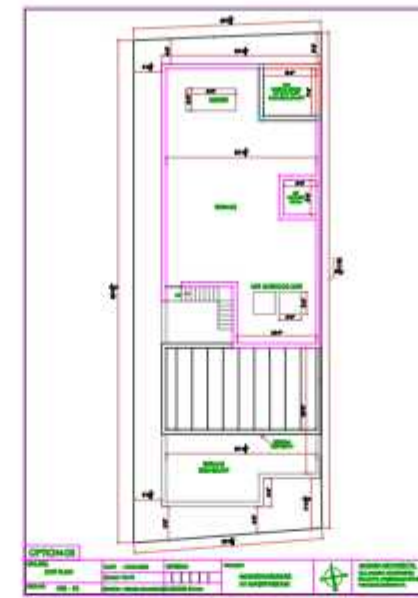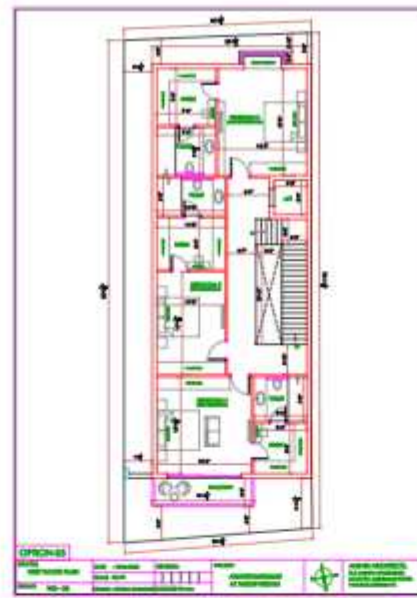

FINALISED OPTIONS



PREVIOUS OPTIONS



ANSARITM
ARCHITECTS

MR. THANIGAIVEL AT CUDDALORE



ANSARI ARCHITECTS



MR. NANDHAKUMAR AT VIRUDHUNAGAR




MR. NANDHAKUMAR AT VIRUDHUNAGAR





MR. NANDHAKUMAR AT VIRUDHUNAGAR



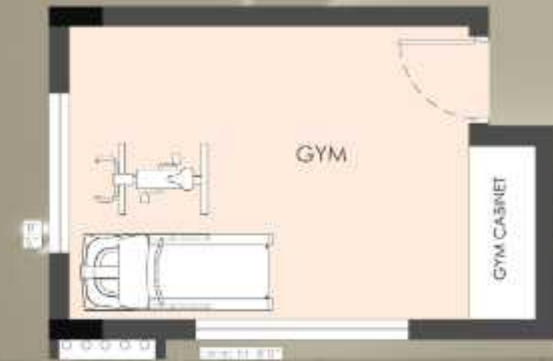


INTERIOR MARKOUT DRAWING / FURNITURE LAYOUT



- This drawing is done basically for finalizing the furniture layout before stepping into the interior stage of designing.
- In this drawing, dimensions of all the fixed furniture from the wall to another nearby unit will be marked in the plan.
- Also movable furniture will be mentioned in the same.




MRS. ABHINAYAA RESIDENCE AT KOTTIVAKKAM - Interior Markout Drawing

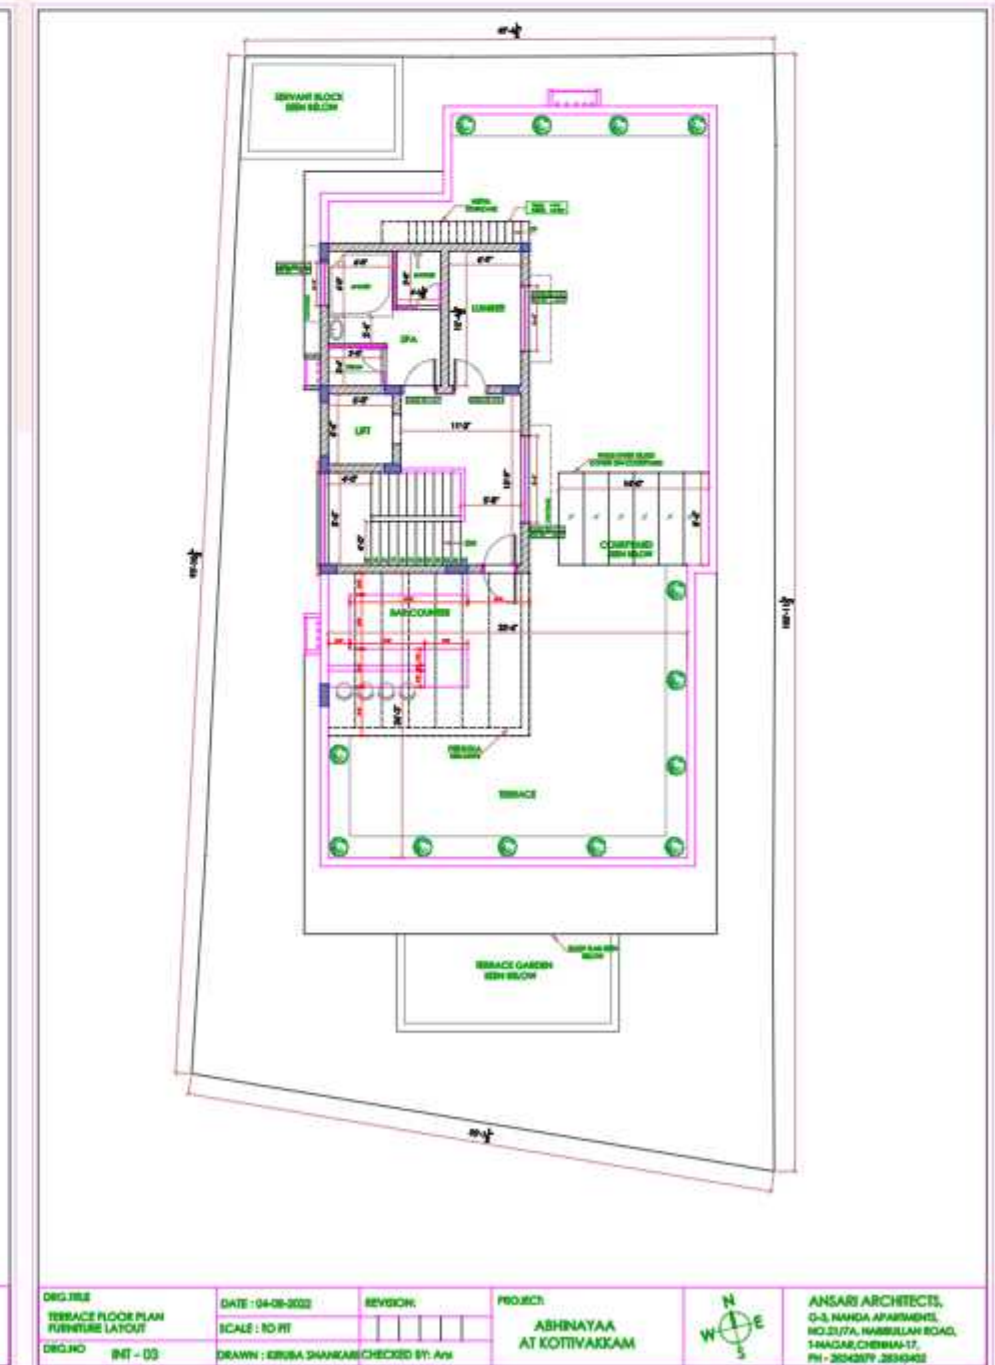
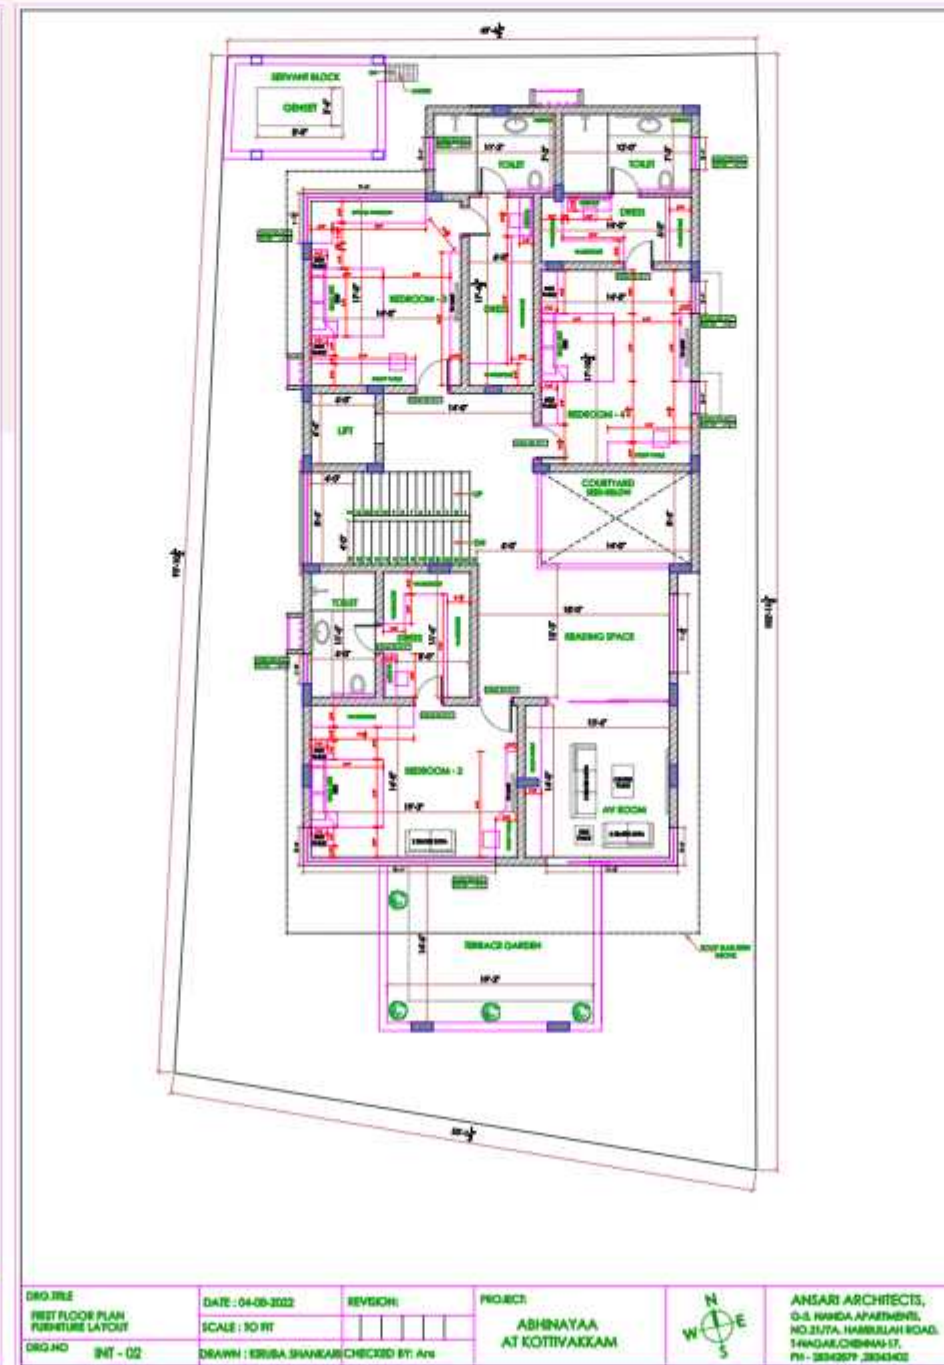
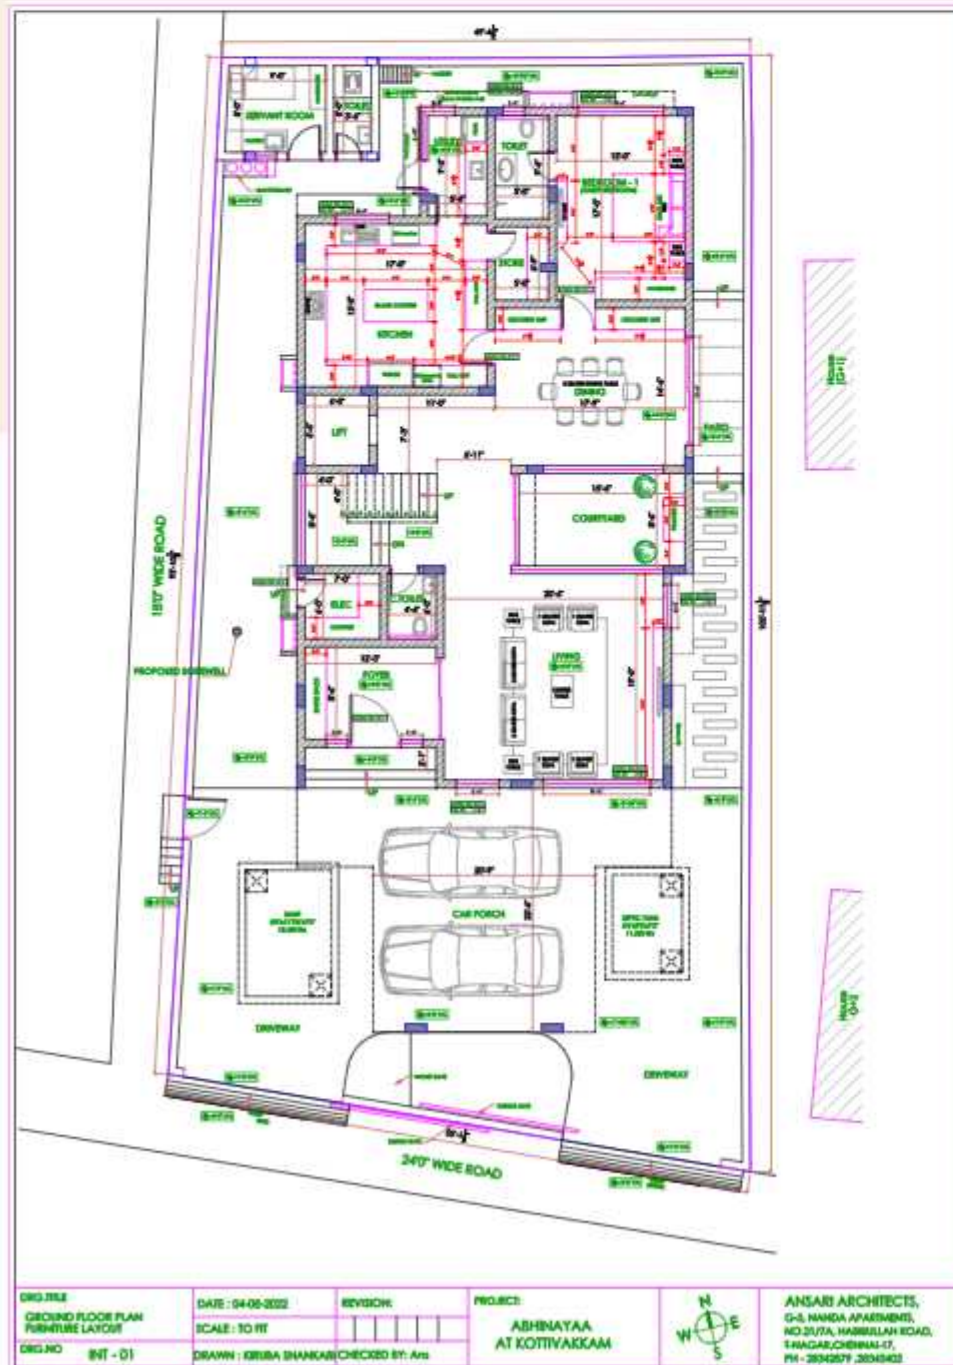




MR. MELVIN RESIDENCE AT AVADI - Interior Markout Drawing

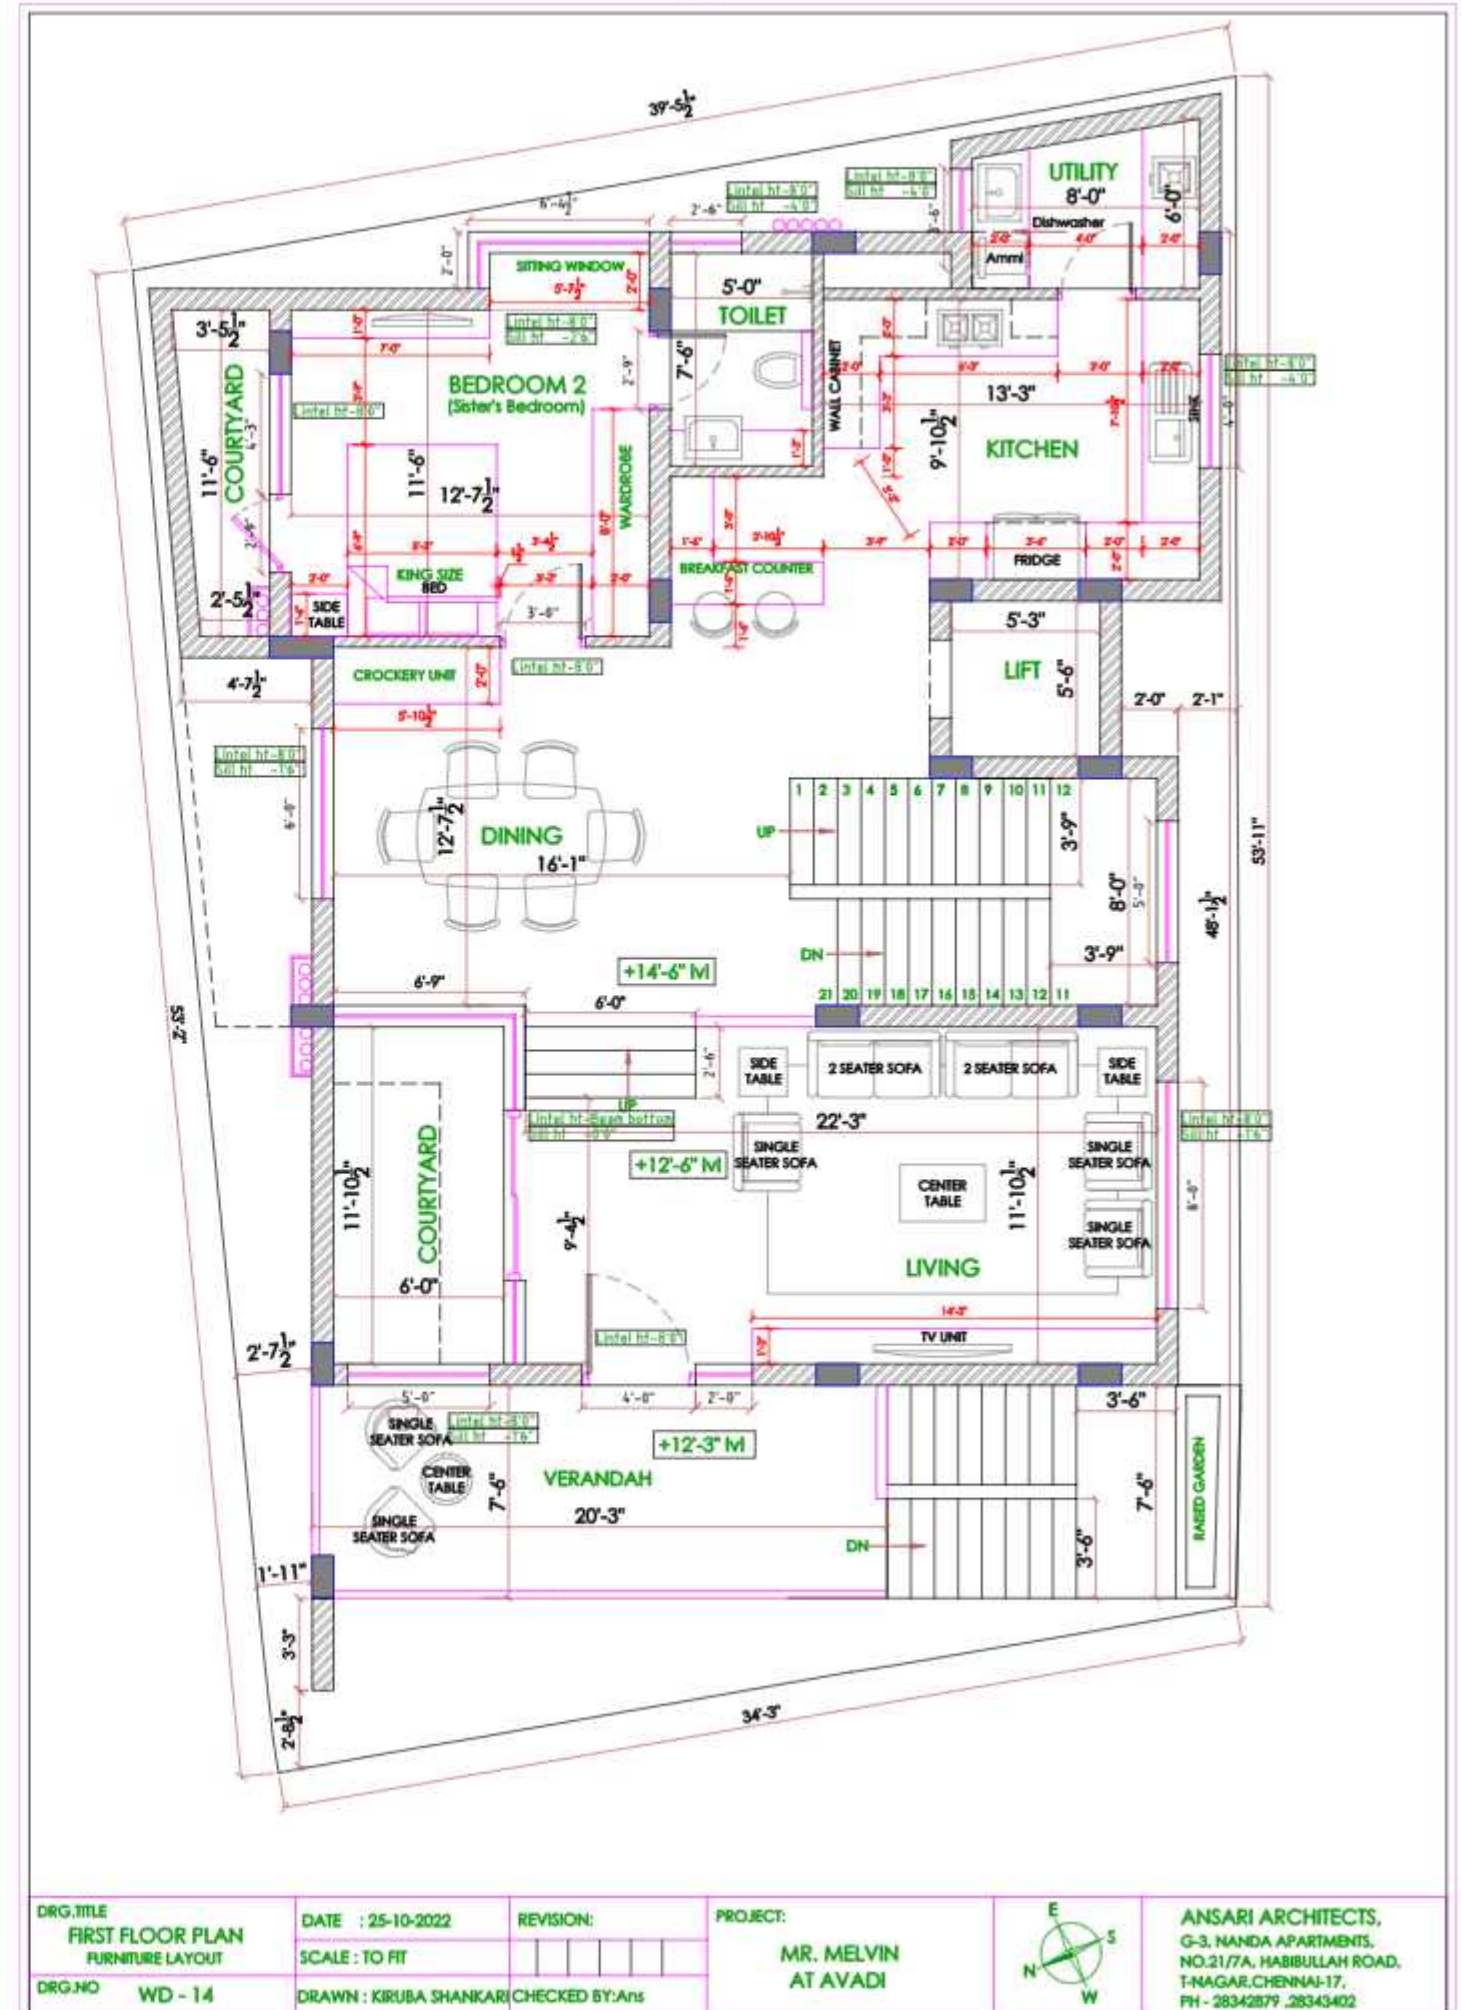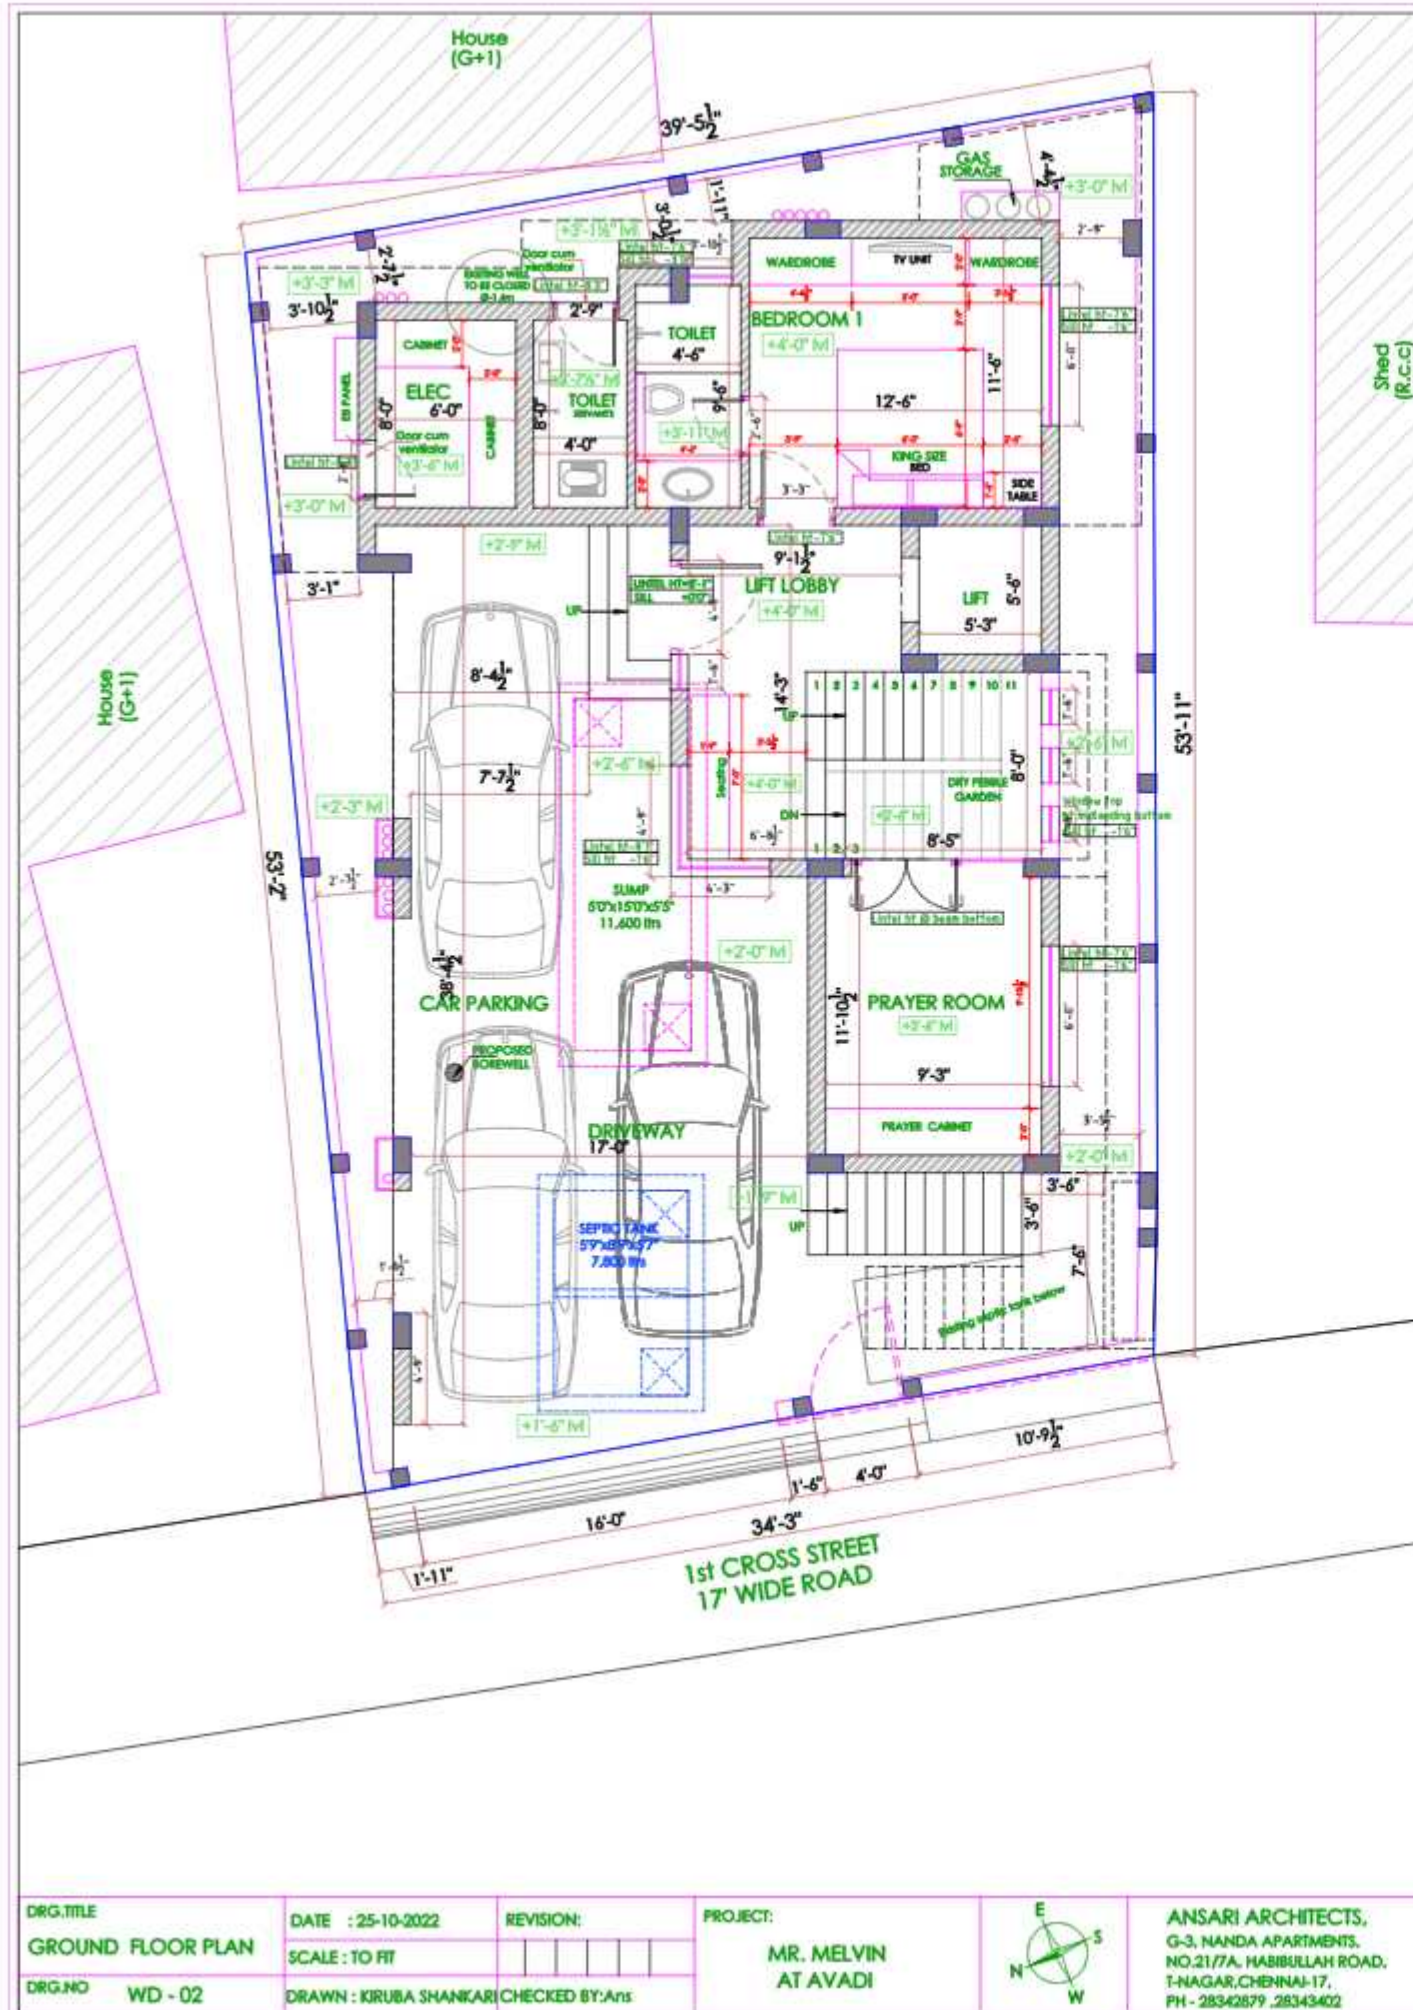

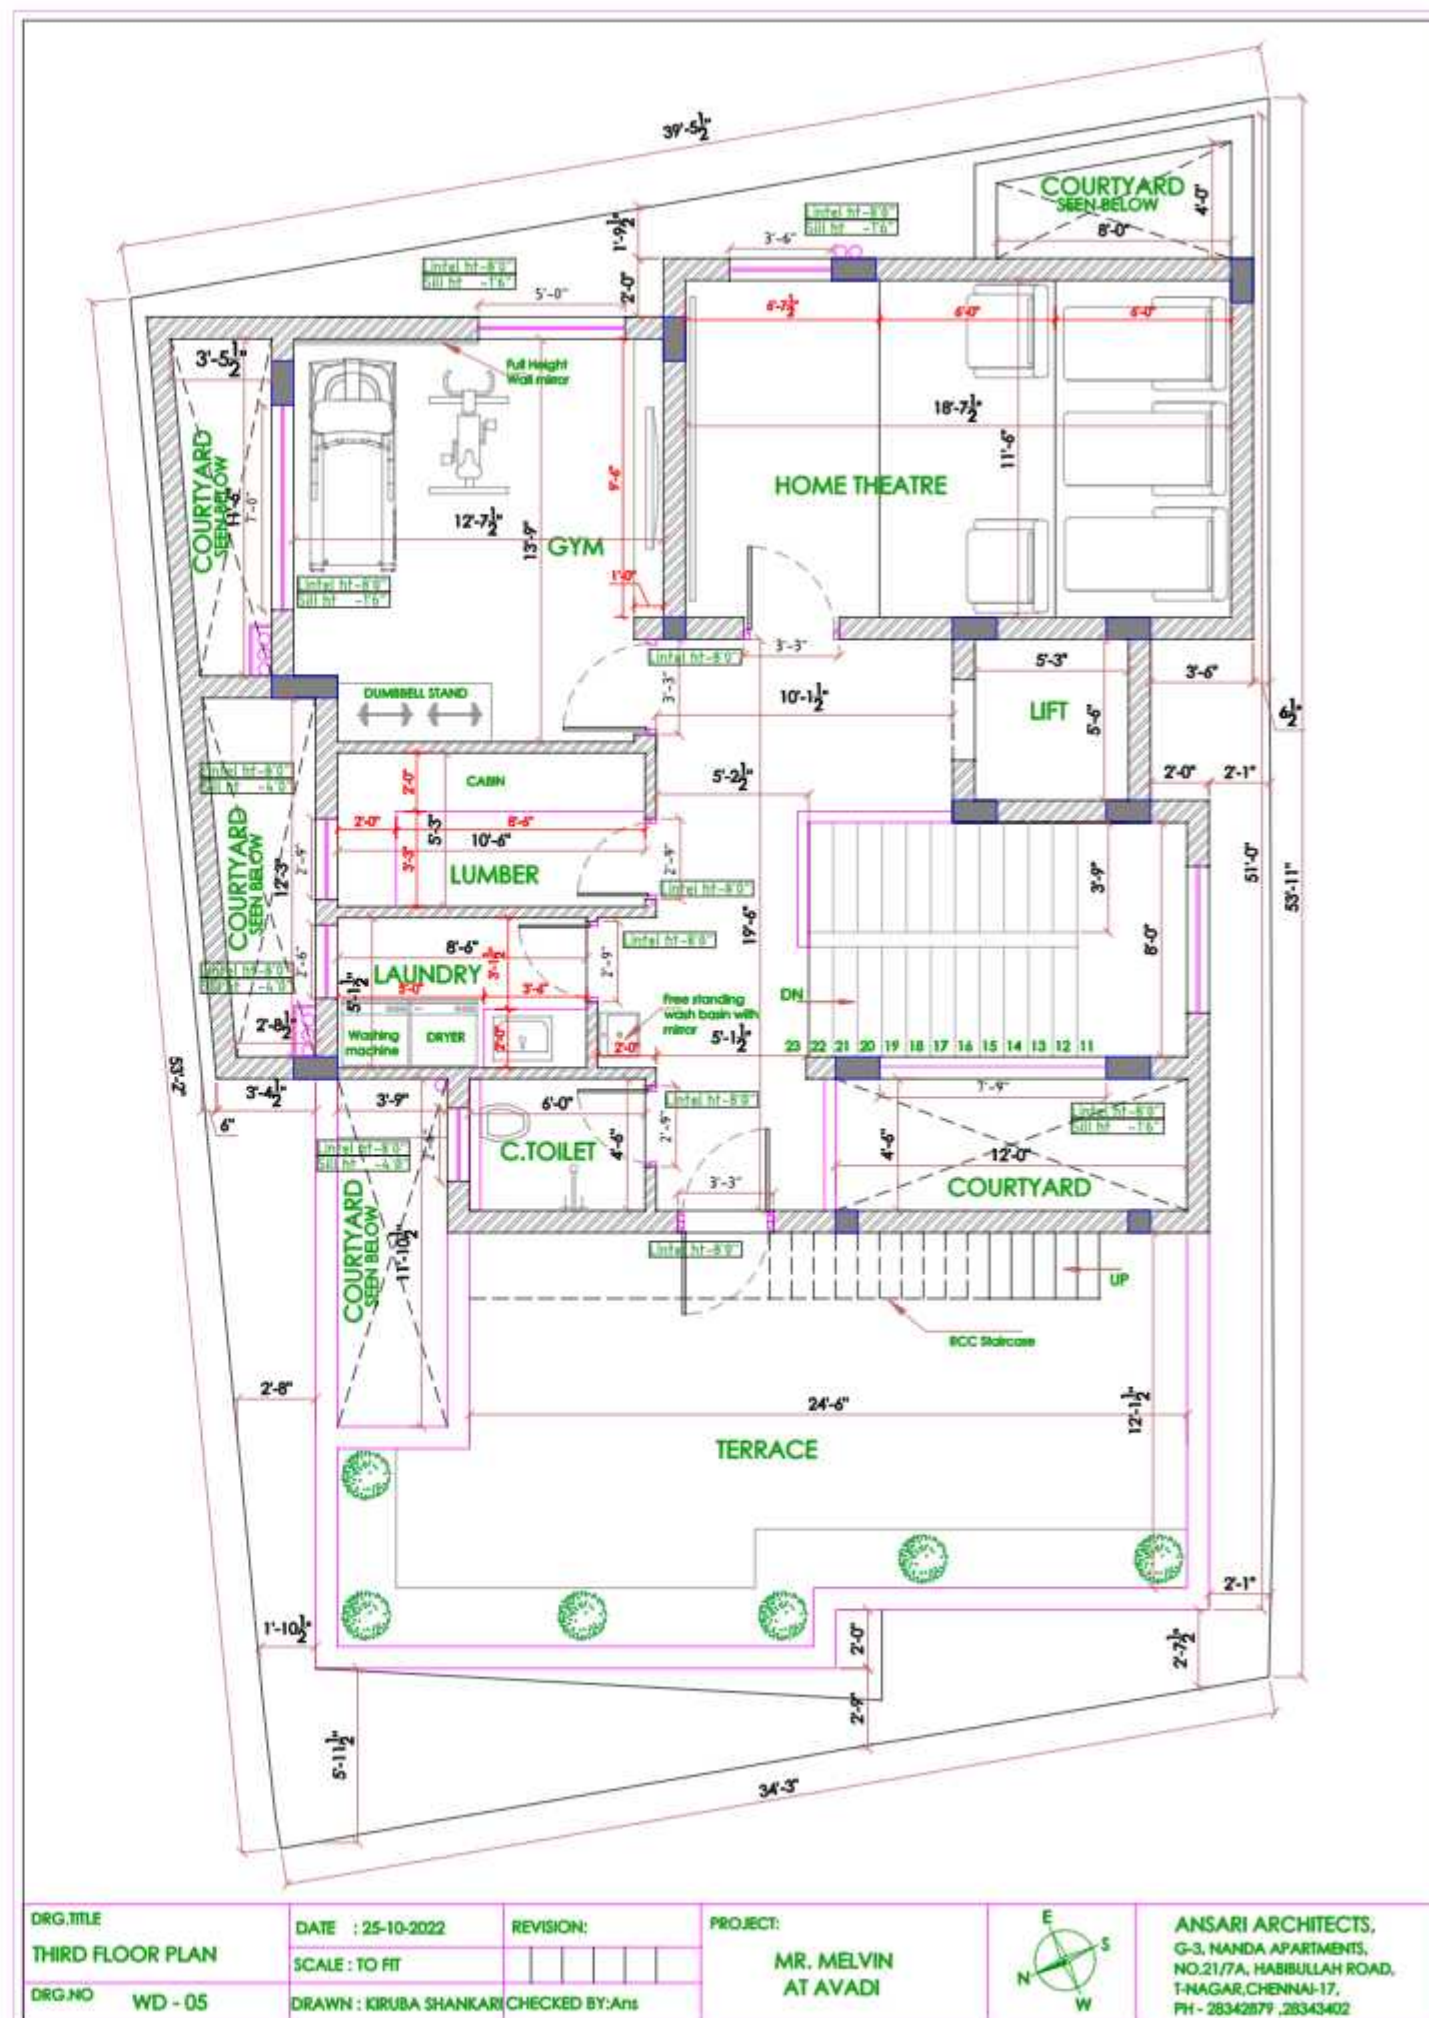

MR. RAJASEKARAN RESIDENCE AT MEHTA NAGAR - Interior Markout Drawing

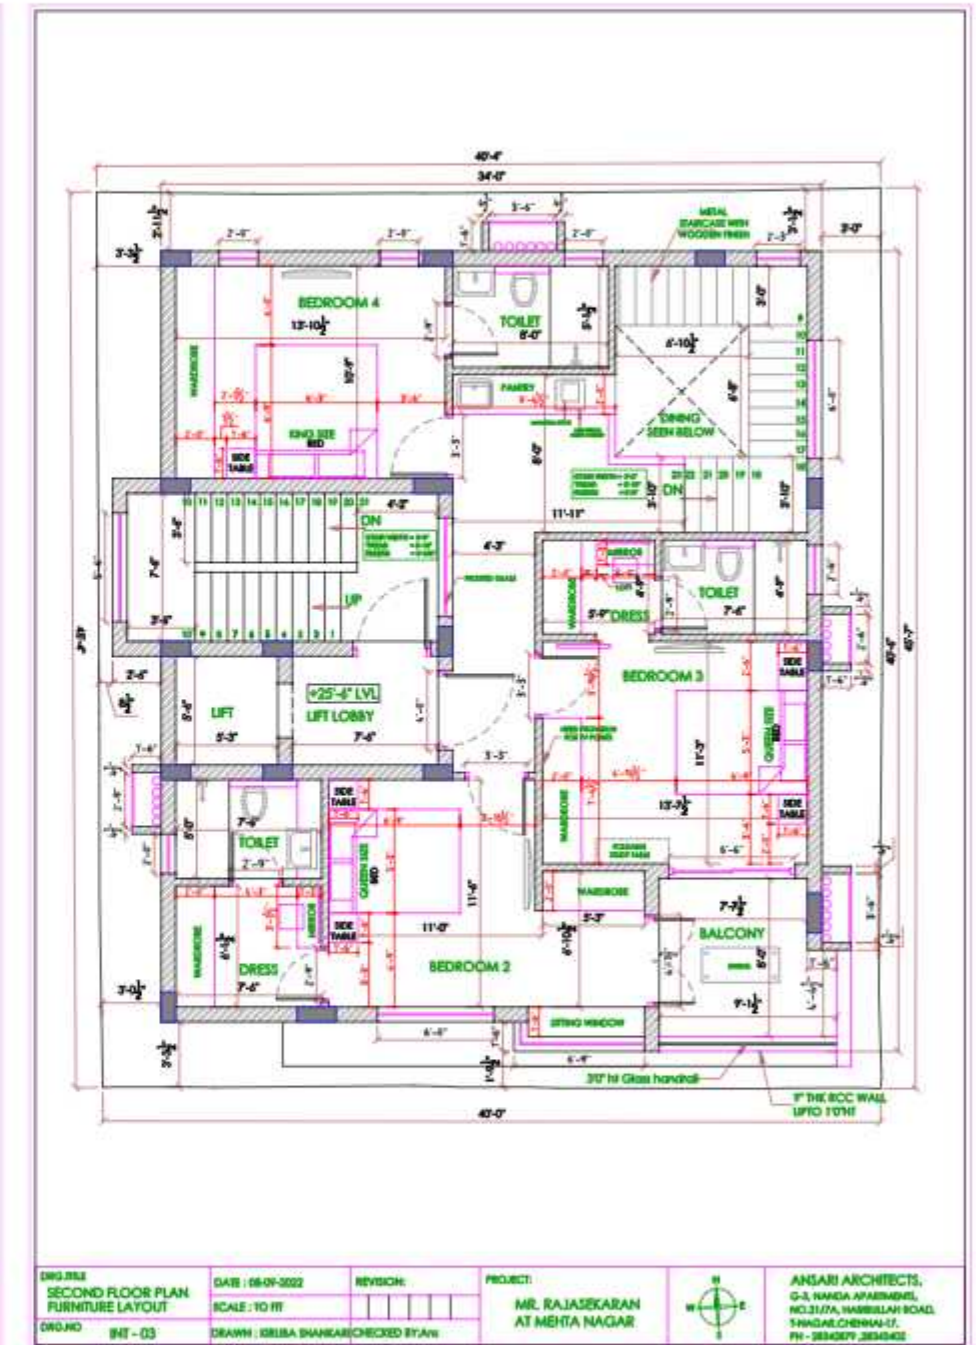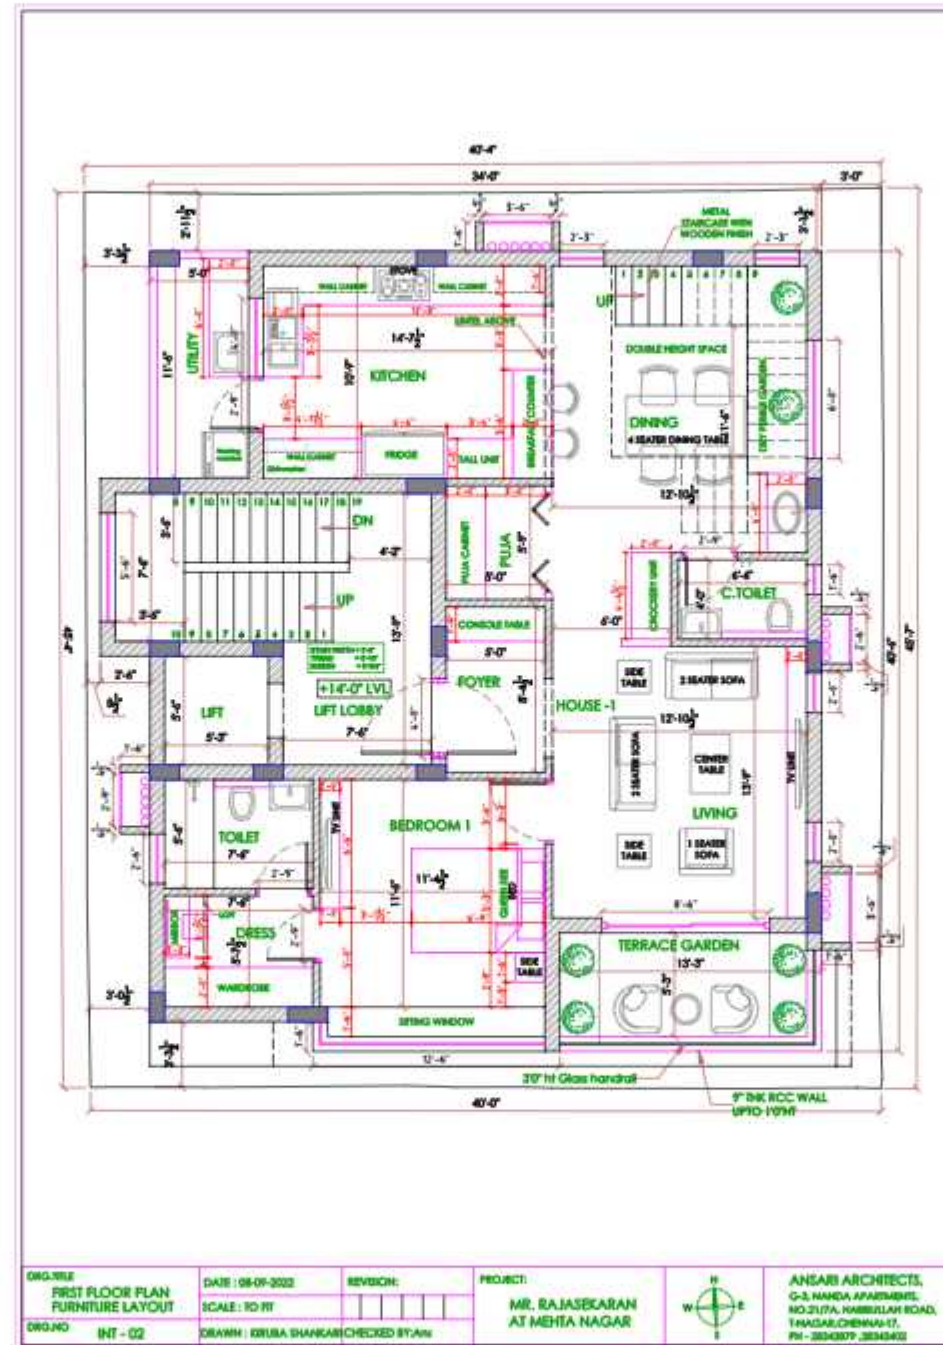
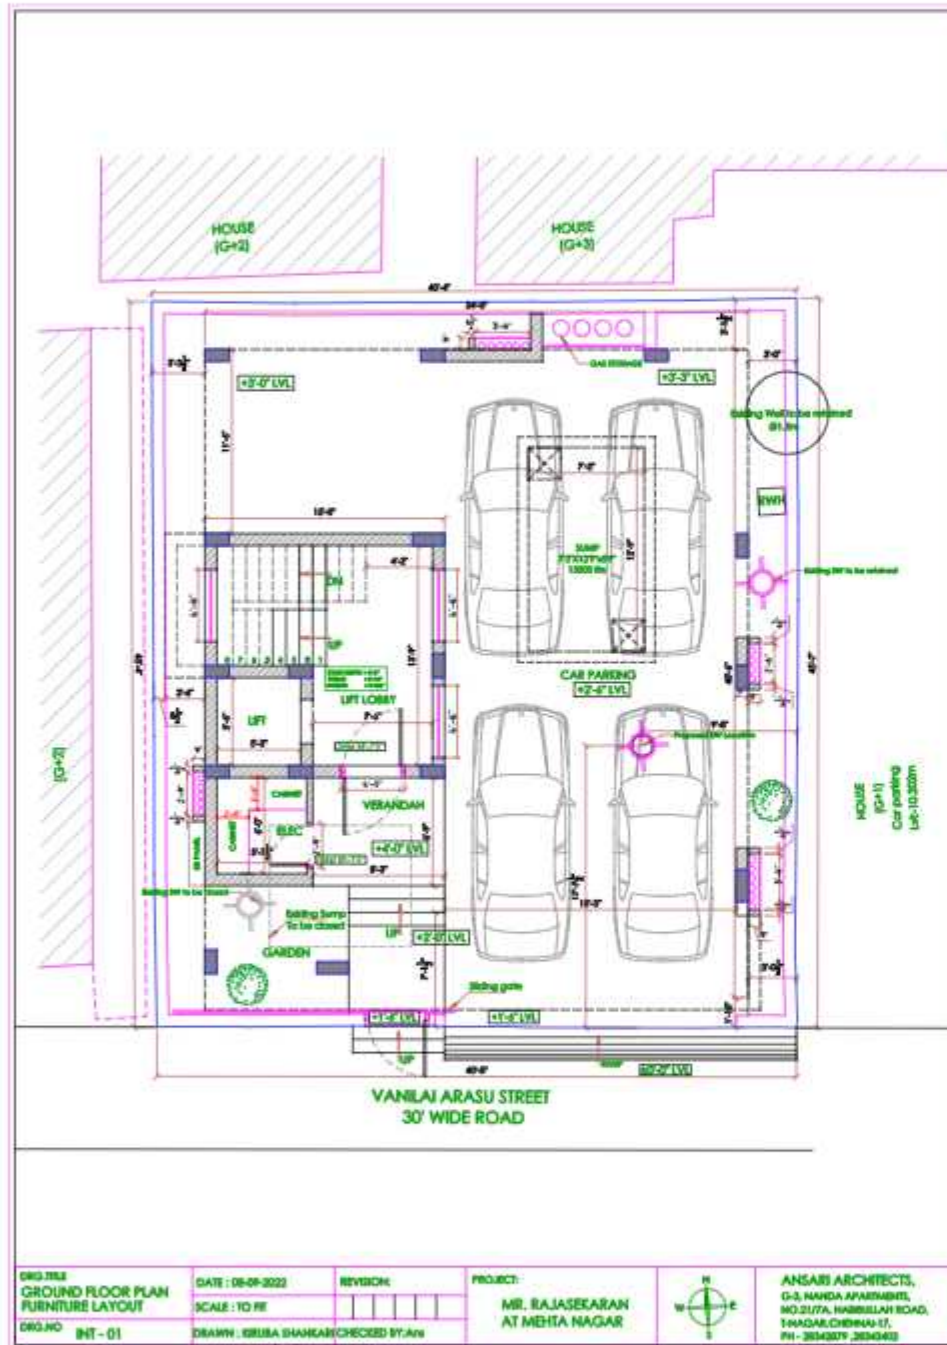


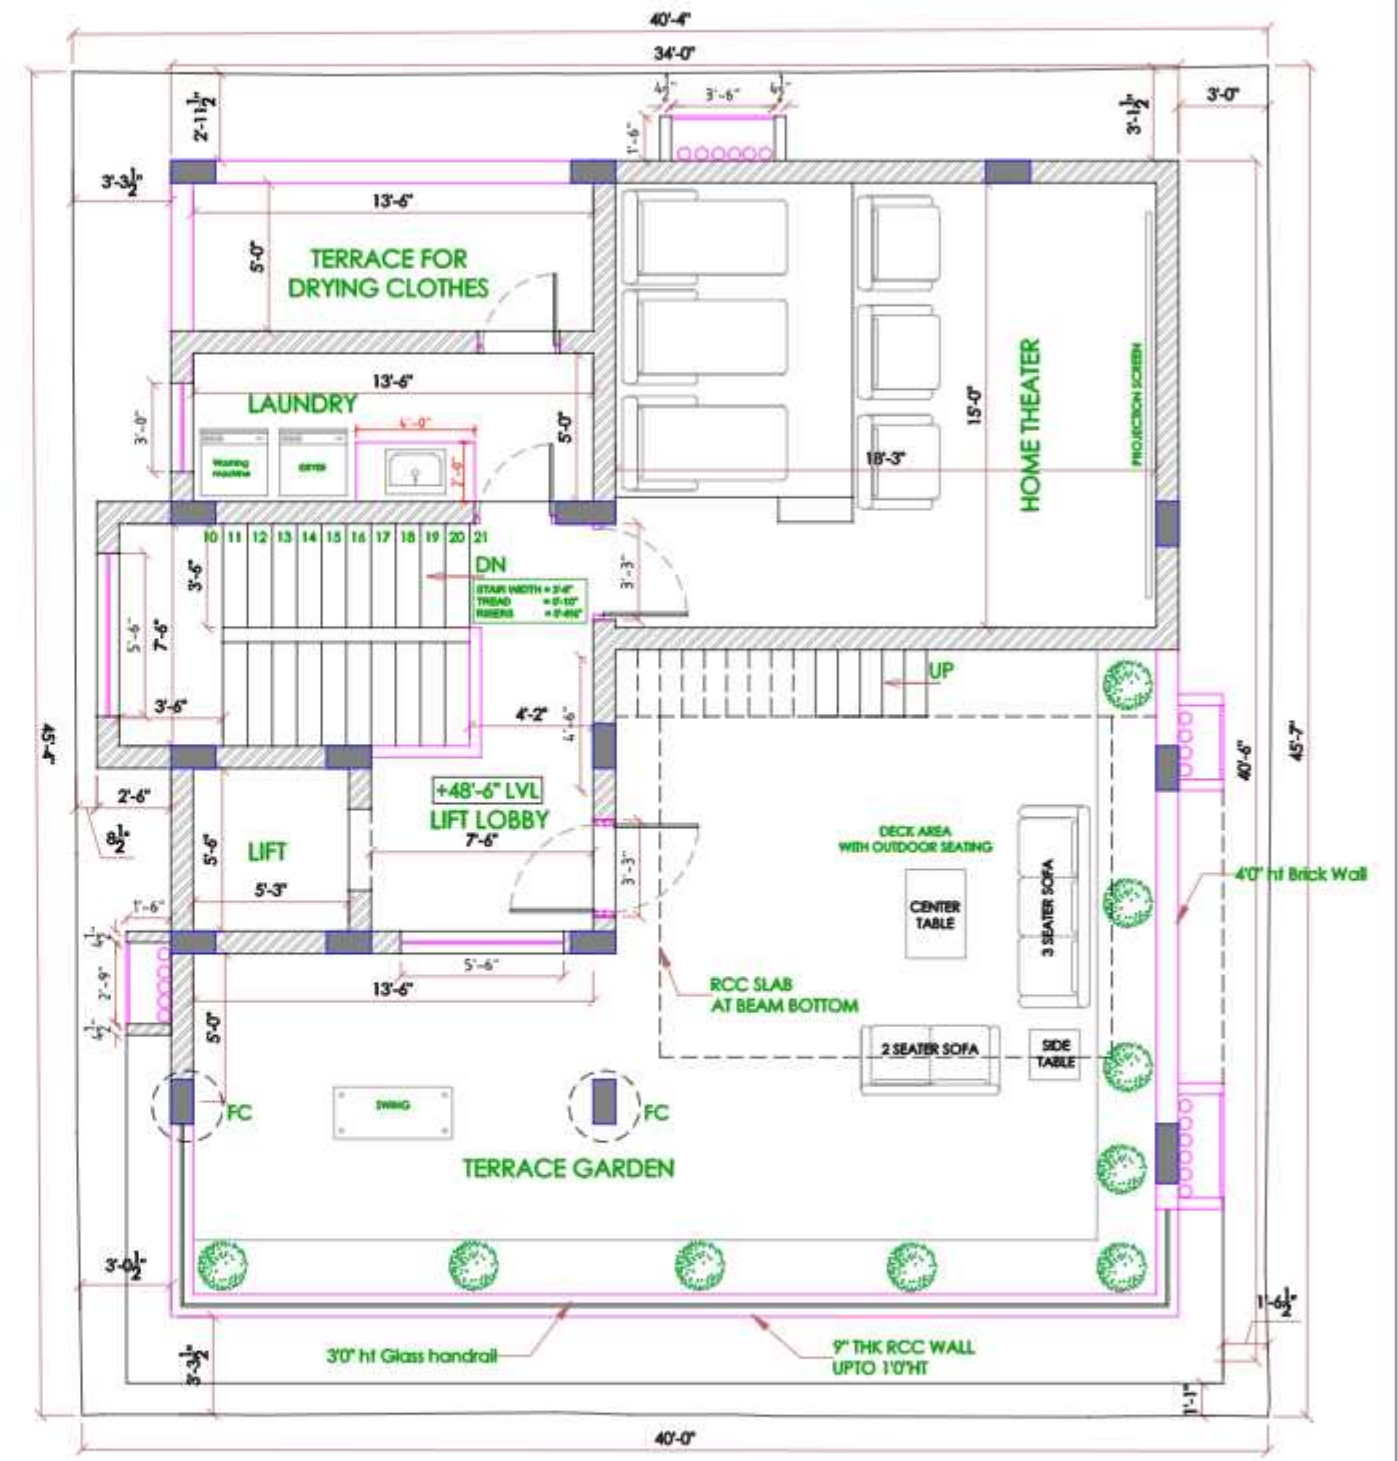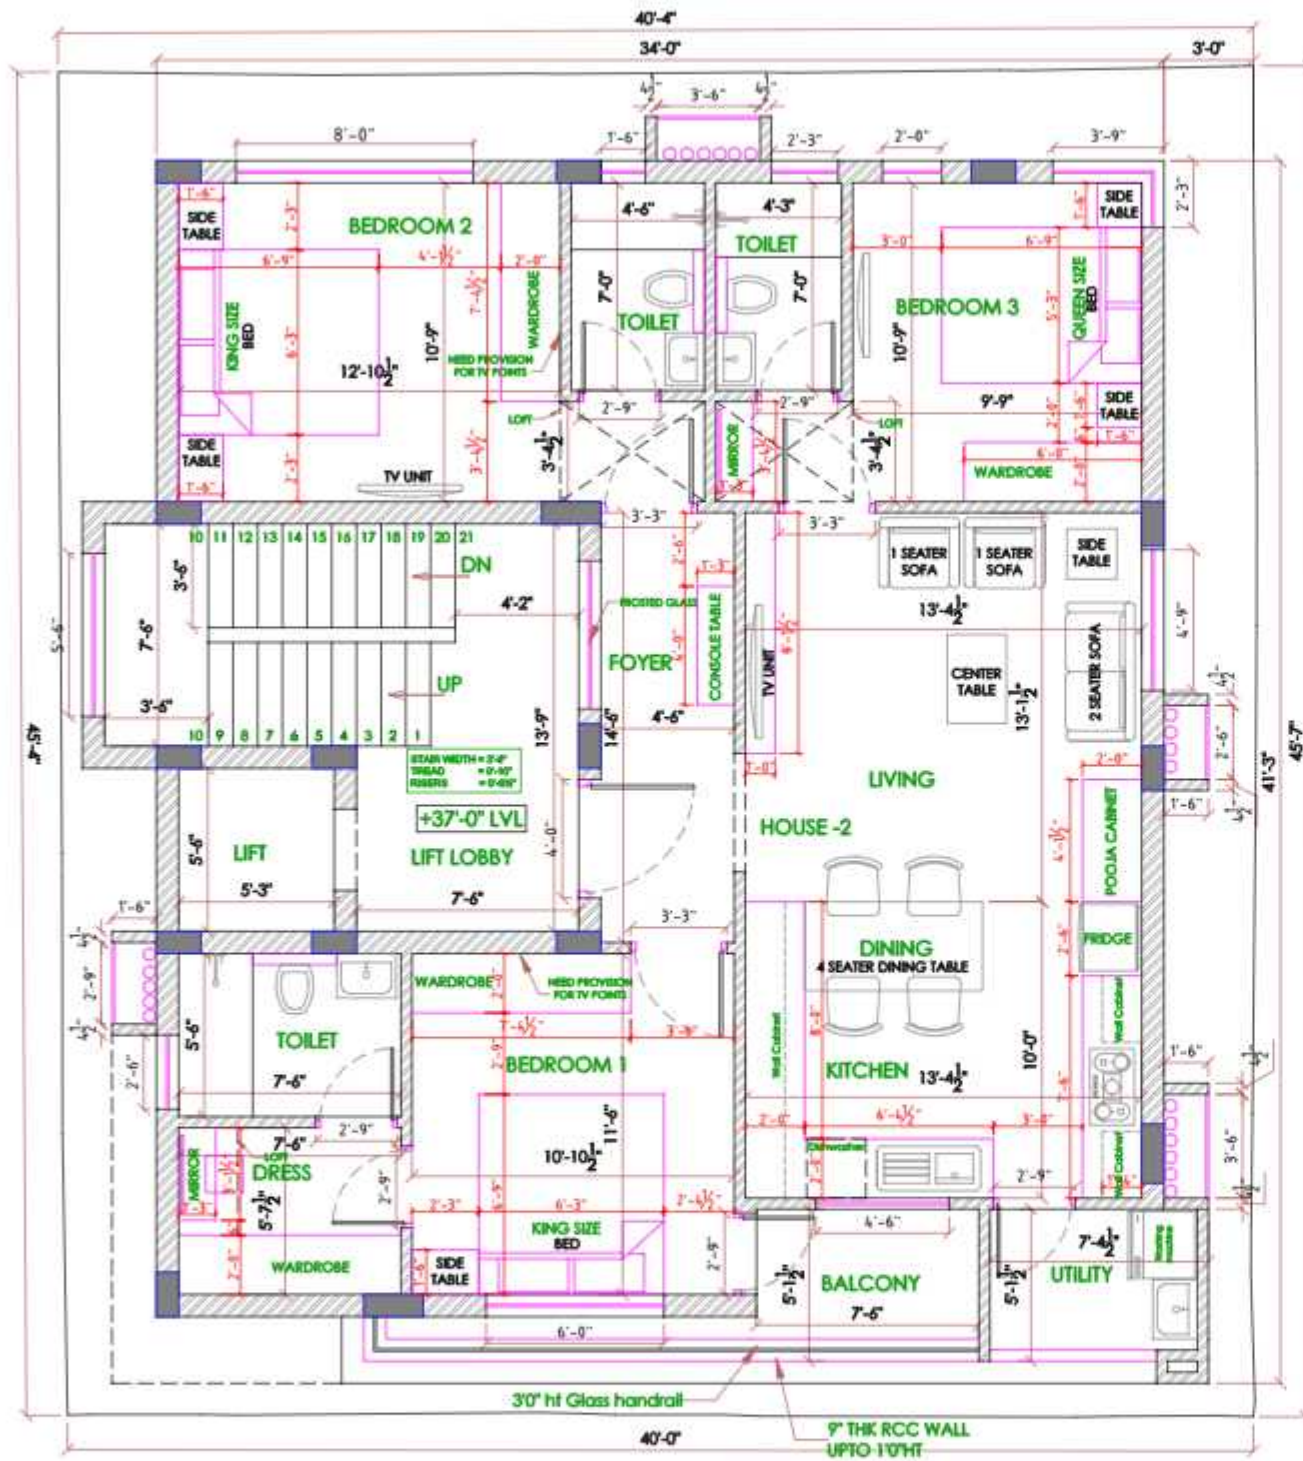

DRG.TITLE THIRD FLOOR PLAN FURNITURE LAYOUT	DATE : 08-09-2022	REVISION:	PROJECT: MR. RAJASEKARAN AT MEHTA NAGAR	ANSARI ARCHITECTS, G-3, NANDA APARTMENTS, NO.21/7A, HABIBULLAH ROAD, T-NAGAR, CHENNAI-17, PH - 28342879, 28343402
DRG.NO INT - 04	DRAWN : KIRUBA SHANKARI CHECKED BY:Ans			

DRG.TITLE TERRACE FLOOR PLAN FURNITURE LAYOUT	DATE : 08-09-2022	REVISION:	PROJECT: MR. RAJASEKARAN AT MEHTA NAGAR	ANSARI ARCHITECTS, G-3, NANDA APARTMENTS, NO.21/7A, HABIBULLAH ROAD, T-NAGAR, CHENNAI-17, PH - 28342879, 28343402
DRG.NO INT - 05	DRAWN : KIRUBA SHANKARI CHECKED BY:Ans			

MR. SENTHAMIZH SELVAN RESIDENCE AT THIRUVARUR - Interior Markout Drawing

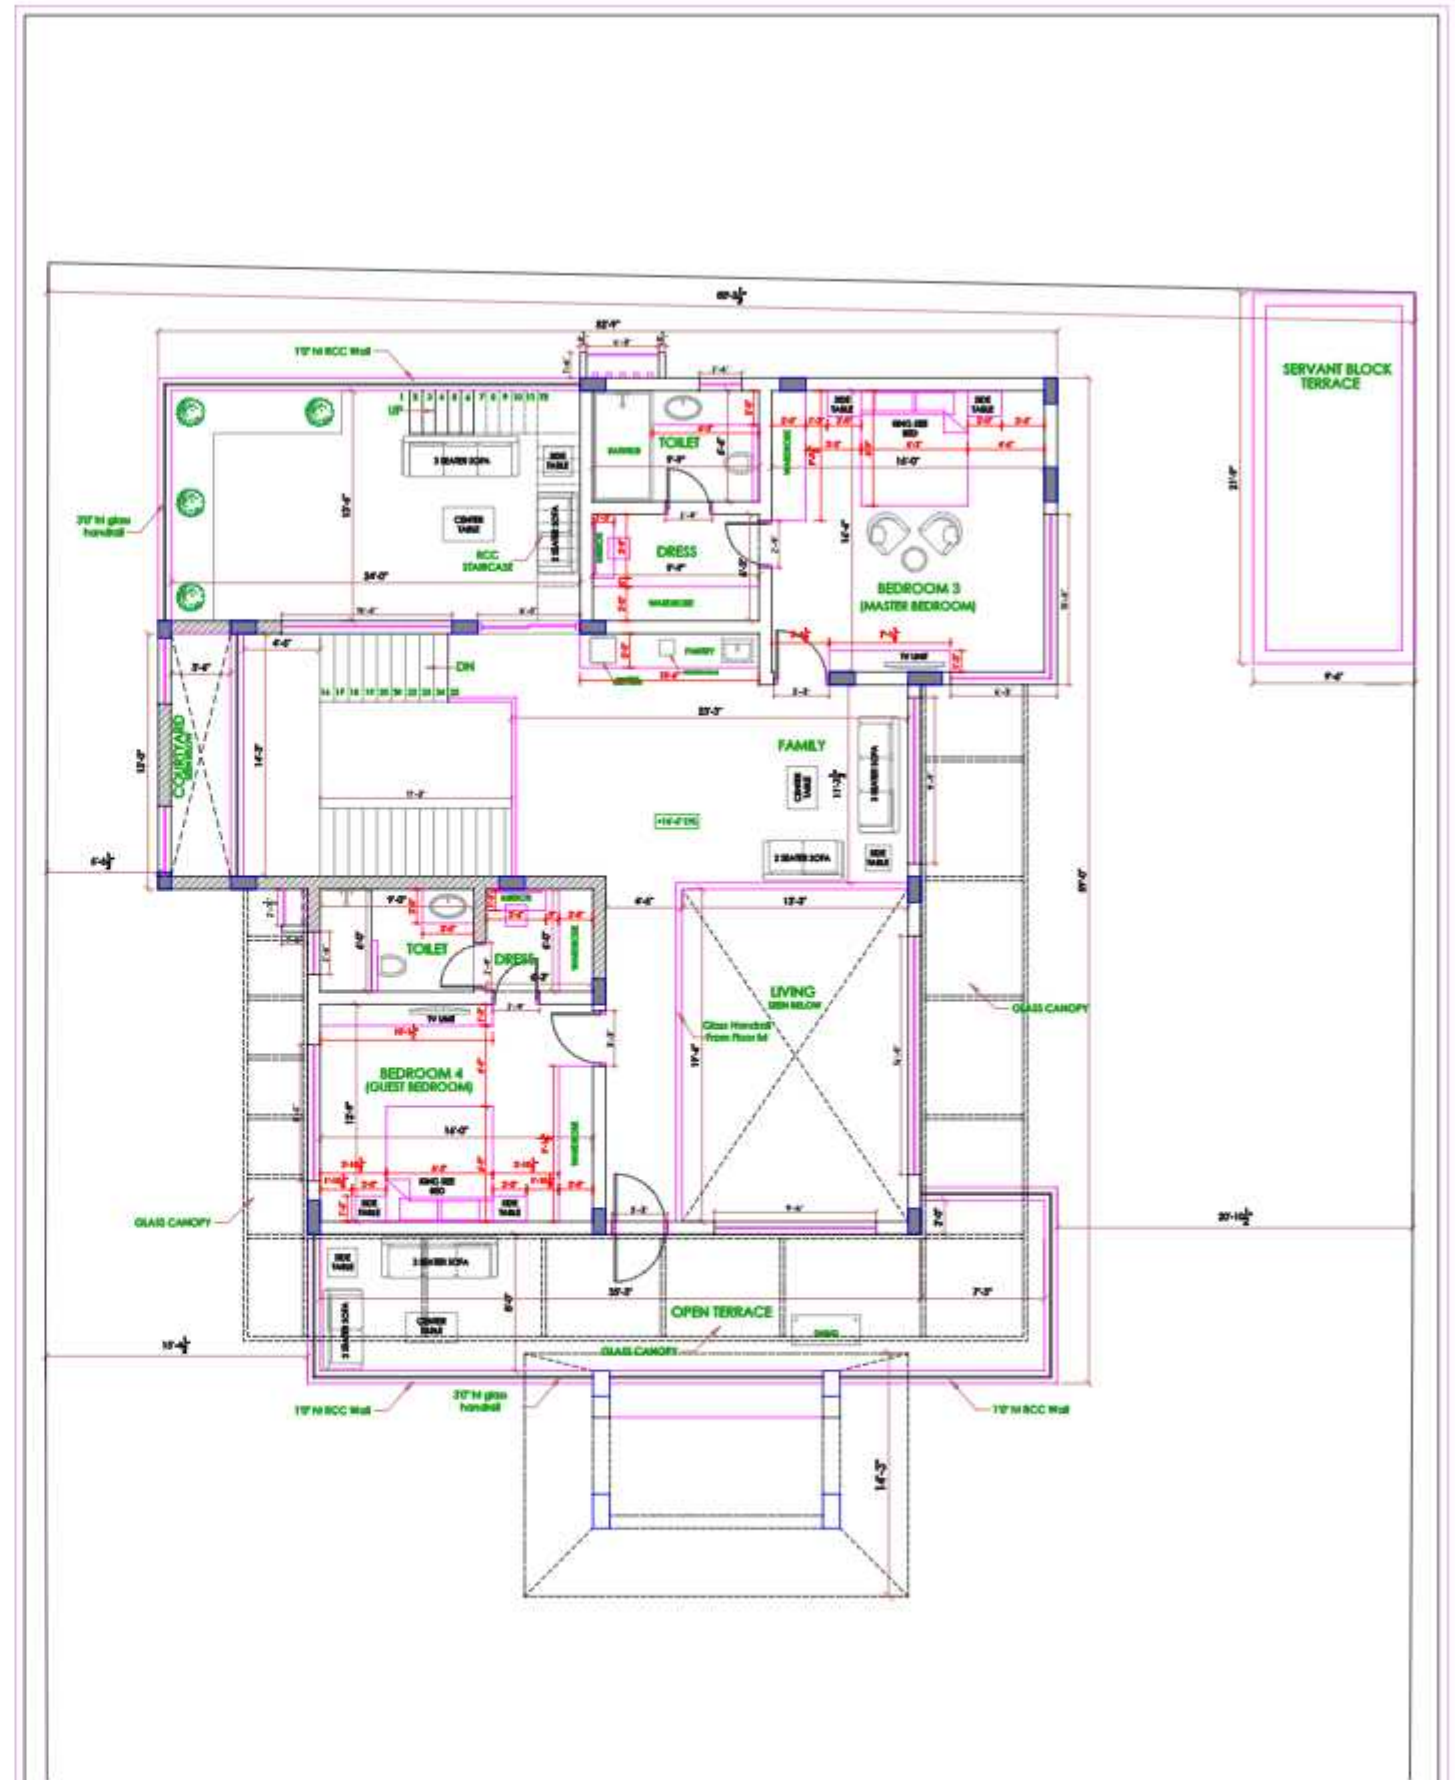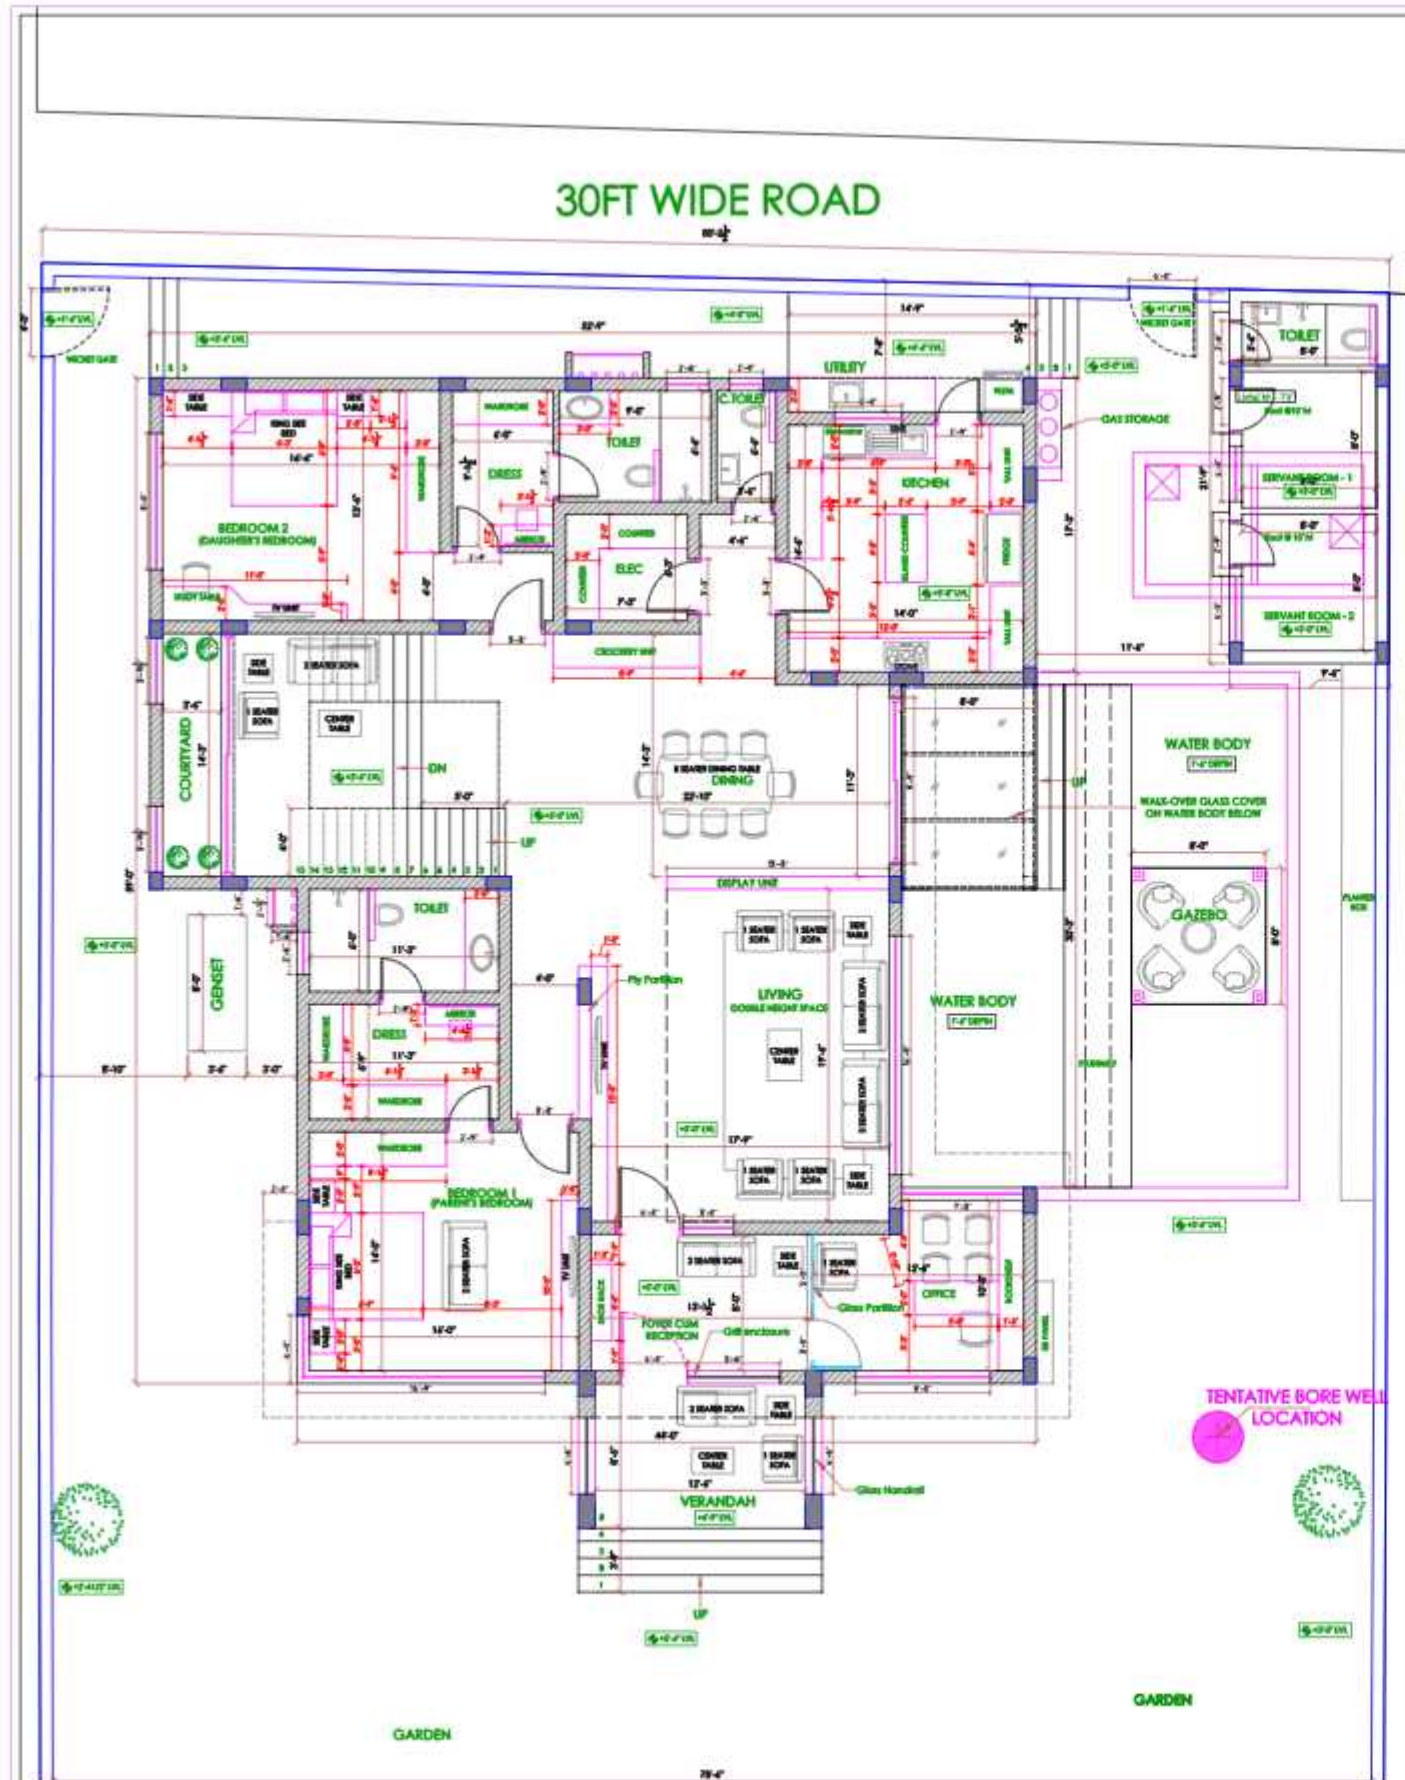

DRG.TITLE
GROUND FLOOR PLAN
FURNITURE LAYOUT

DATE : 07-09-2022

REVISION:

PROJECT:
Mr. SENTHAMIZH SELVAN
AT THIRUVARUR



ANSARI ARCHITECTS,
G-3, NANDA APARTMENTS,
NO.21/7A, HABIBULLAH ROAD,
T-NAGAR, CHENNAI-17,
PH - 28342879, 28343402

DRG.NO
INT - 01

DRAWN : KIRUBA SHANKARI CHECKED BY: Anil

DRG.TITLE
FIRST FLOOR PLAN
FURNITURE LAYOUT

DATE : 07-09-2022

REVISION:

PROJECT:
Mr. SENTHAMIZH SELVAN
AT THIRUVARUR







ANSARI ARCHITECTS,
G-3, NANDA APARTMENTS,
NO.21/7A, HABIBULLAH ROAD,
T-NAGAR, CHENNAI-17,
PH - 28342879, 28343402

DRG.NO
INT - 02

DRAWN : KIRUBA SHANKARI CHECKED BY: Anil

MR. BATHRAGIRI RESIDENCE AT KOLATHUR - Interior Markout Drawing

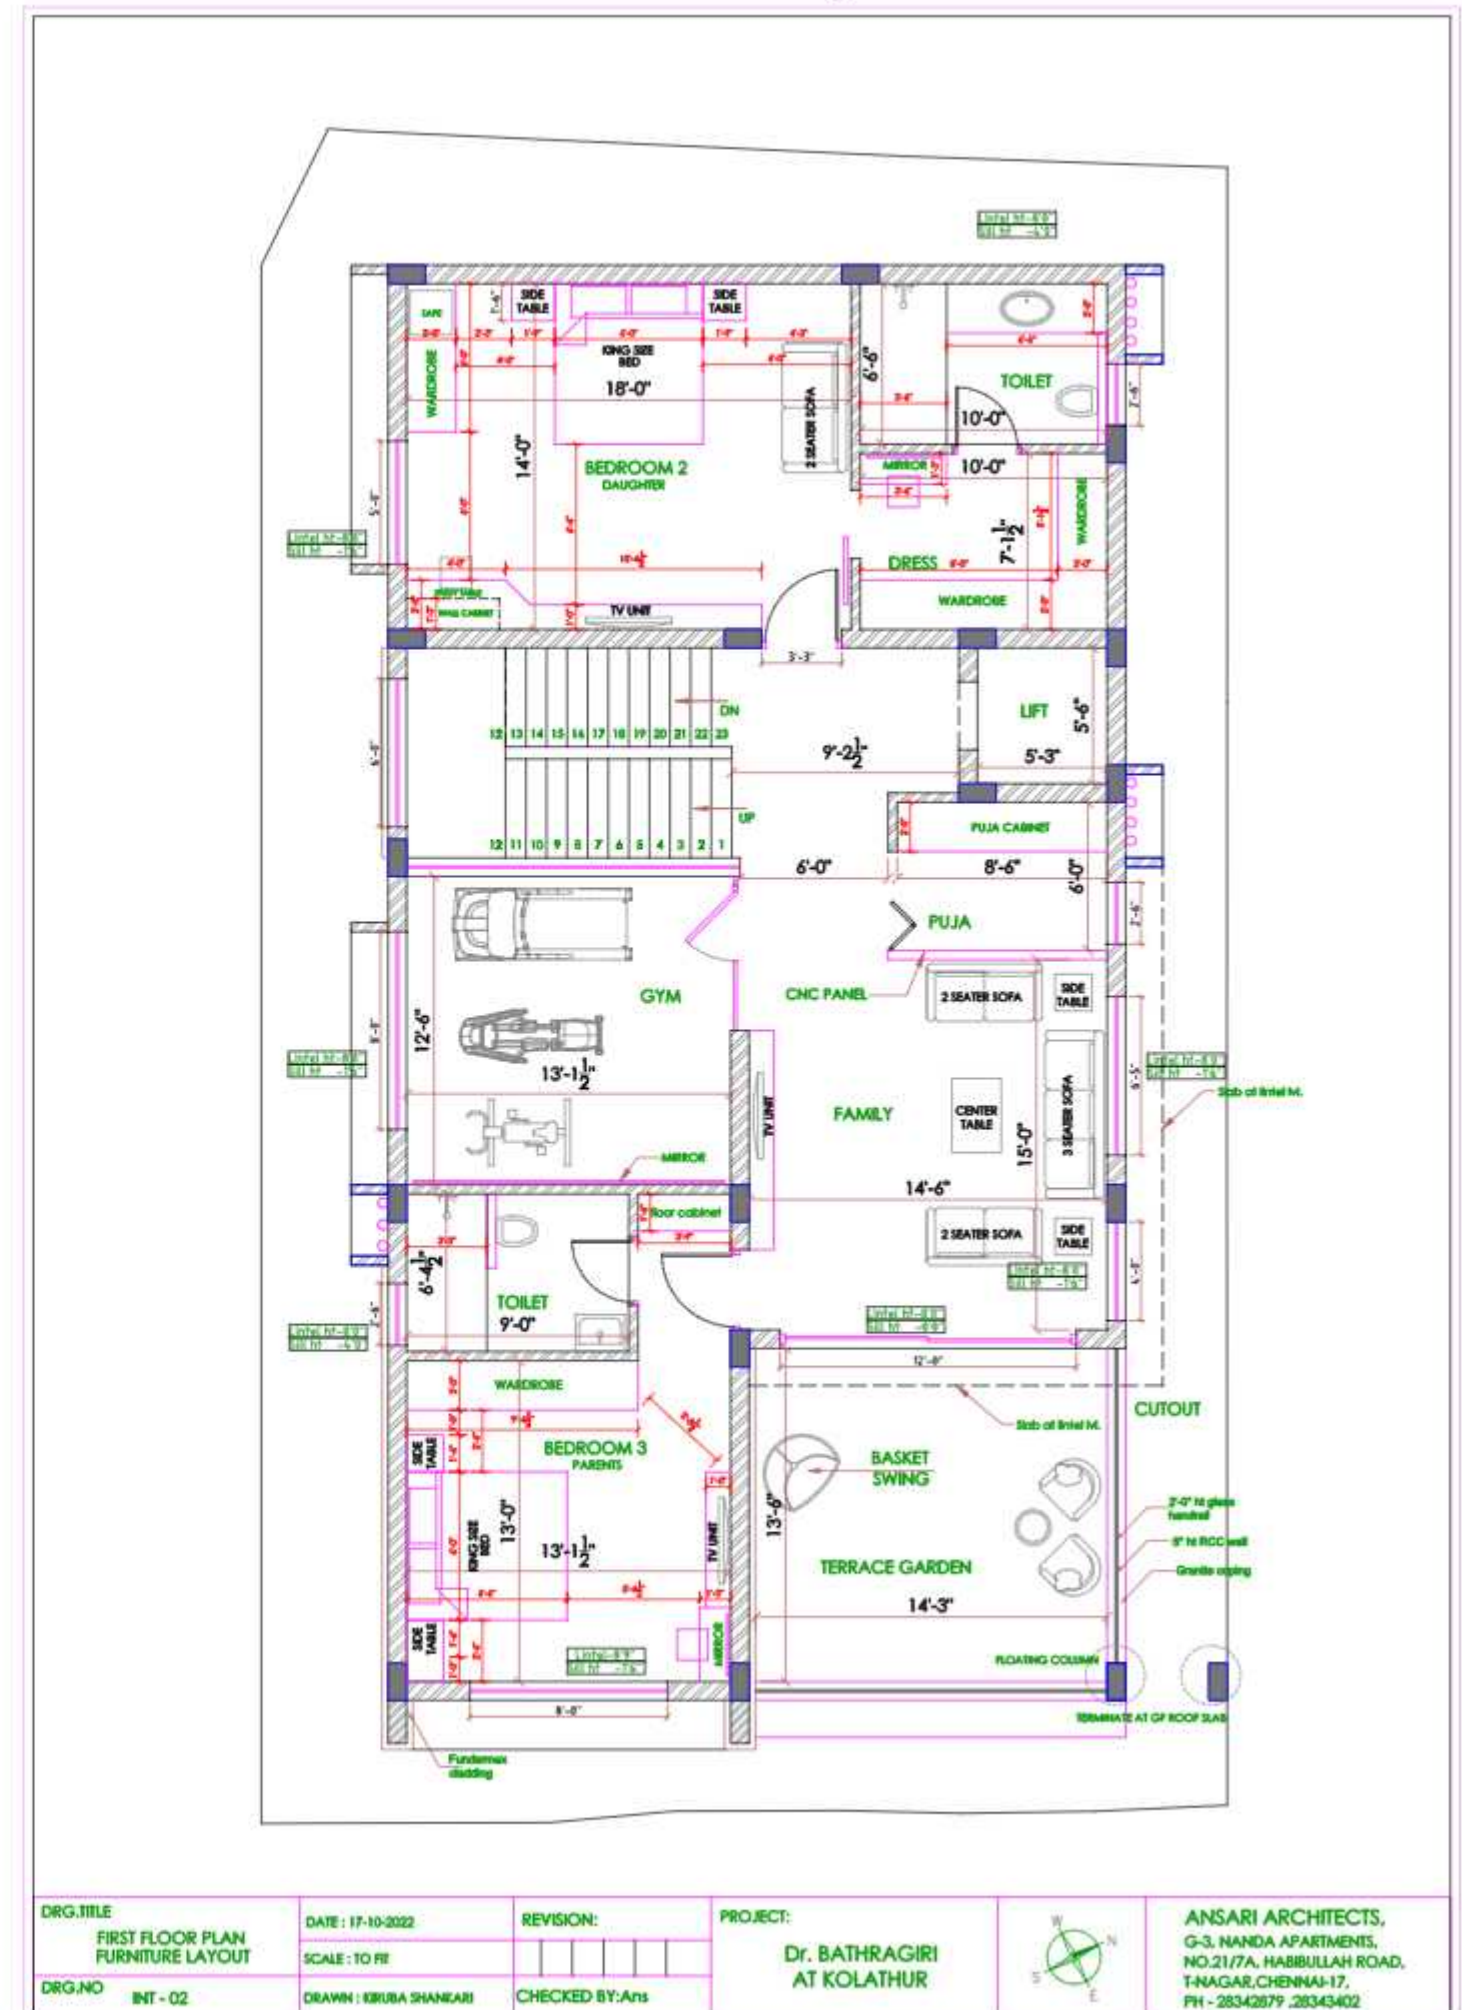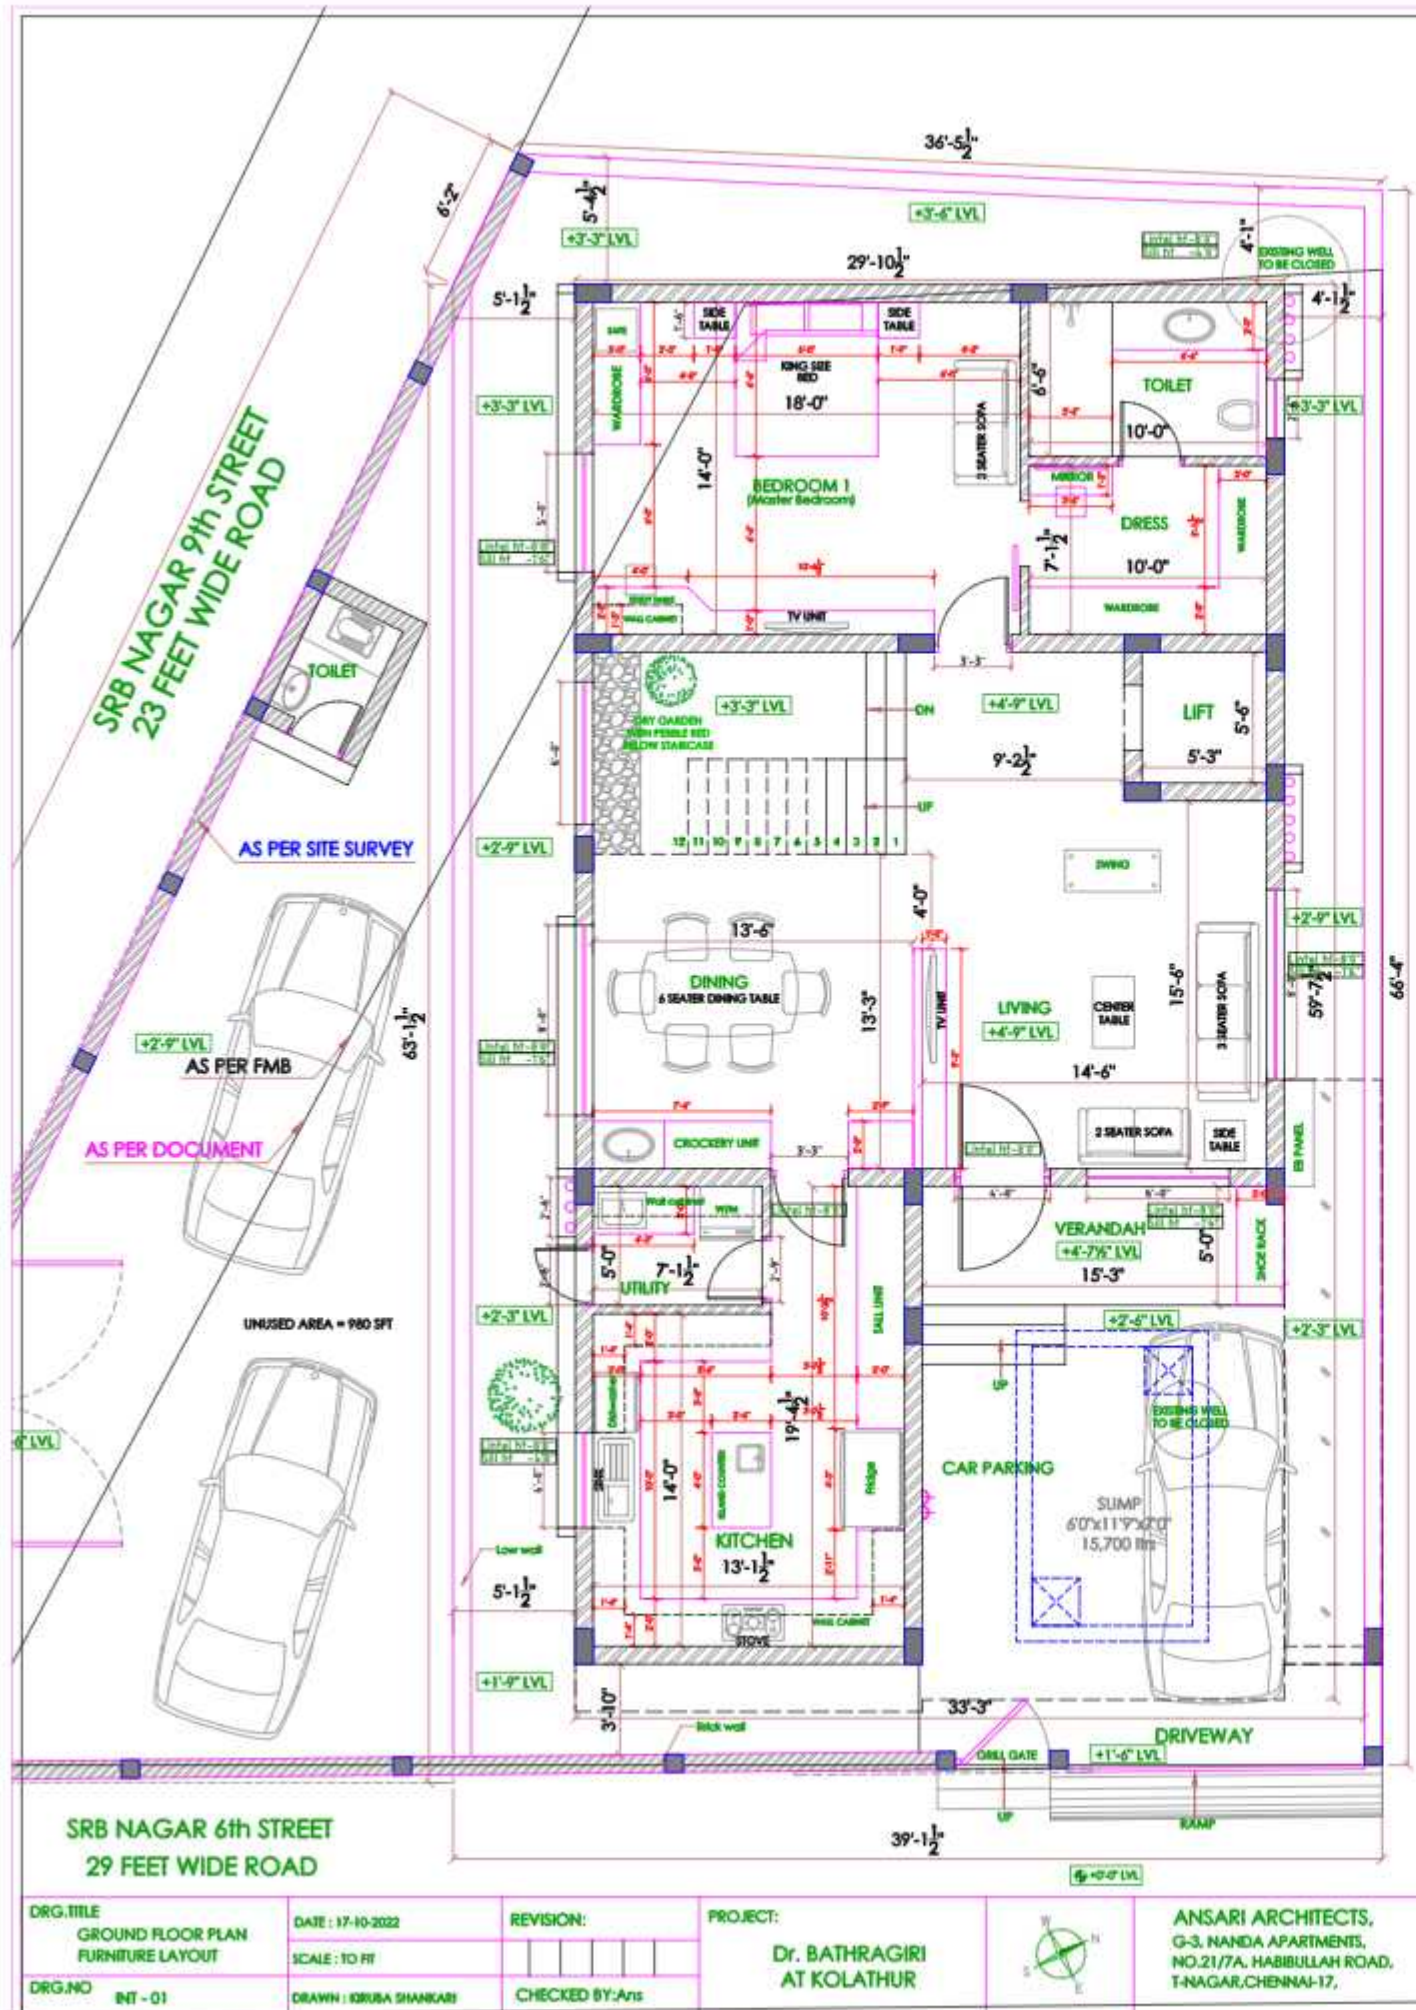

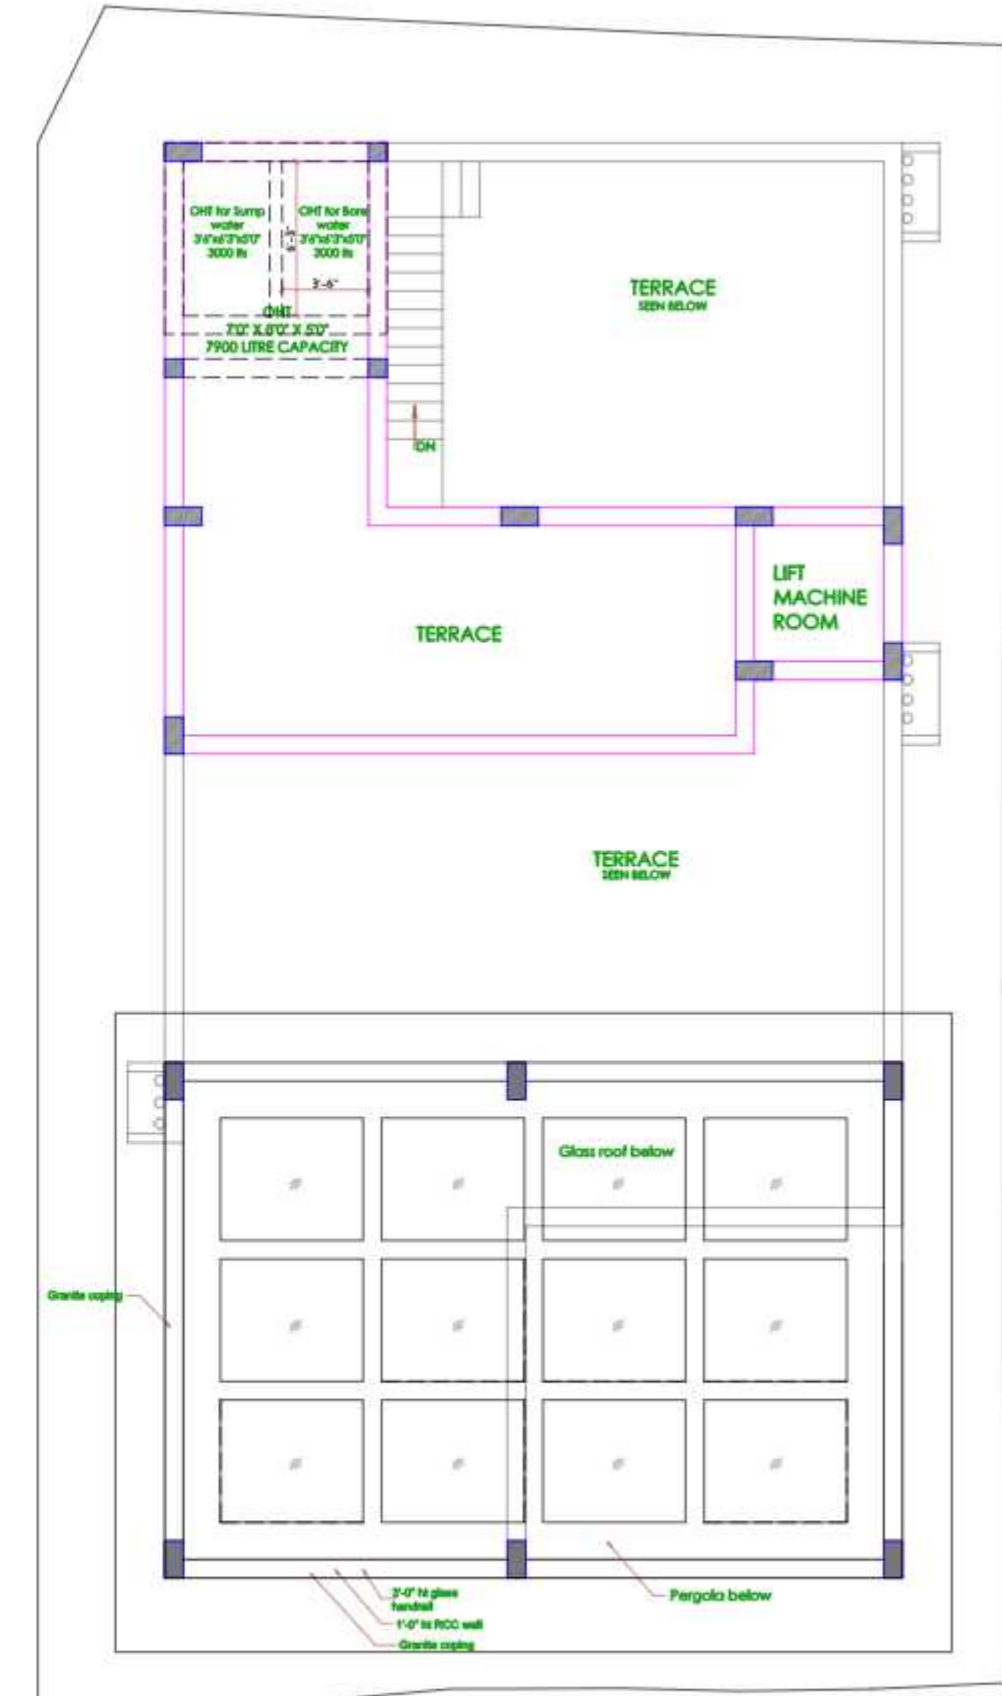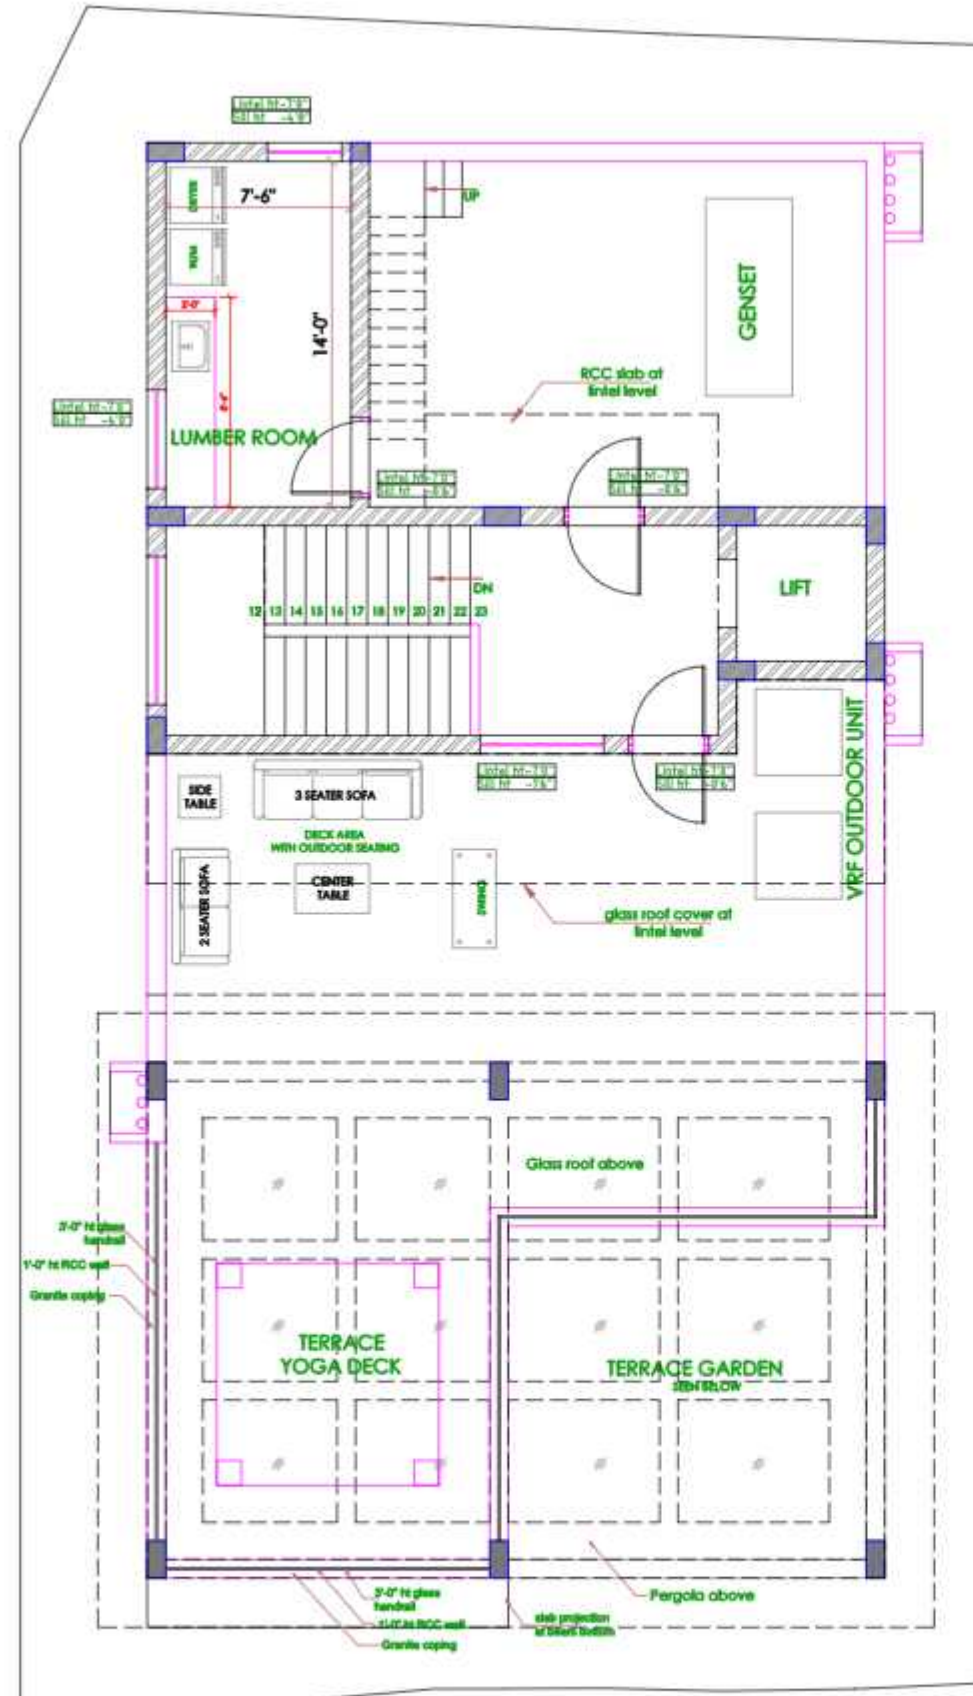

DRG.TITLE
TERRACE FLOOR PLAN
FURNITURE LAYOUT
DRG.NO INT - 03

DATE : 17-10-2022
SCALE : TO FIT
DRAWN : KIRUBA SHANKAR
CHECKED BY:Ans

PROJECT:
Dr. BATHRAGIRI
AT KOLATHUR



ANSARI ARCHITECTS,
G-3, NANDA APARTMENTS,
NO.21/7A, HABIBULLAH ROAD,
T-NAGAR, CHENNAI-17,
PH - 28342879, 28343402


DRG.TITLE
OHT PLAN
FURNITURE LAYOUT
DRG.NO INT - 04

DATE : 17-10-2022
SCALE : TO FIT
DRAWN : KIRUBA SHANKAR
CHECKED BY:Ans


PROJECT:
Dr. BATHRAGIRI
AT KOLATHUR




ANSARI ARCHITECTS,
G-3, NANDA APARTMENTS,
NO.21/7A, HABIBULLAH ROAD,
T-NAGAR, CHENNAI-17,
PH - 28342879, 28343402

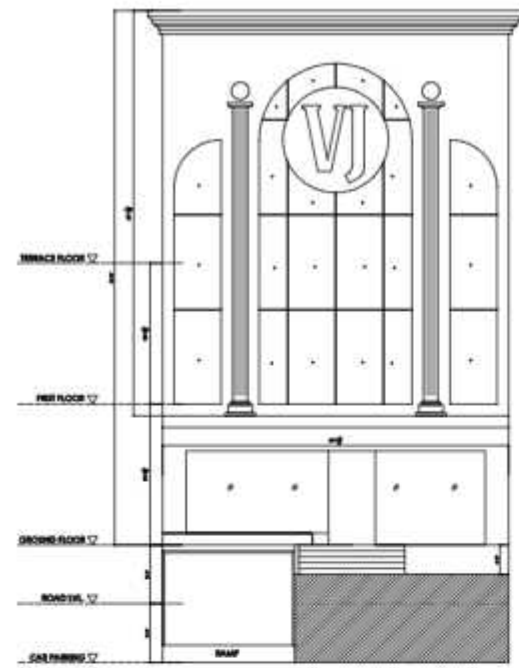


FRONT ELEVATION
OPTION - 01

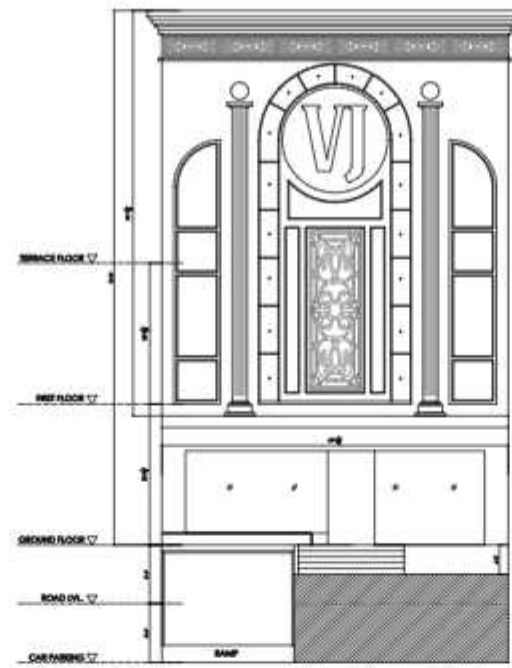


FRONT ELEVATION
OPTION - 02

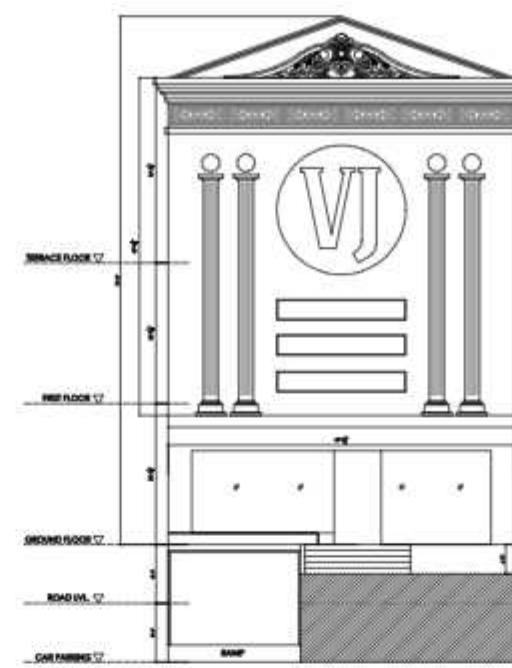


FRONT ELEVATION
OPTION - 03

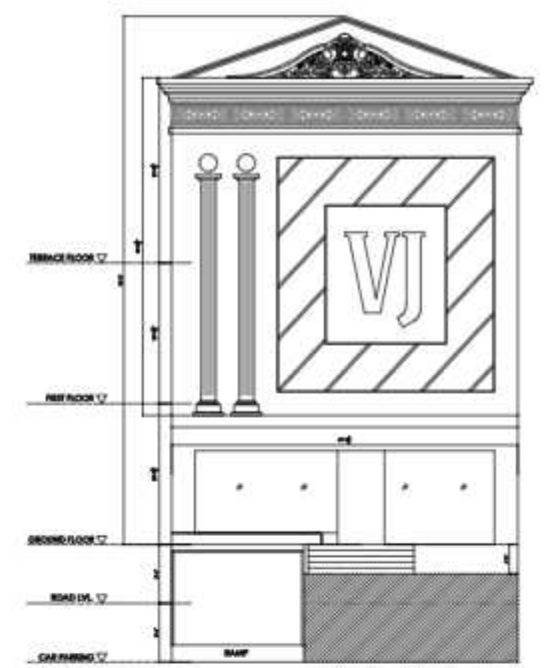


FRONT ELEVATION
OPTION - 04

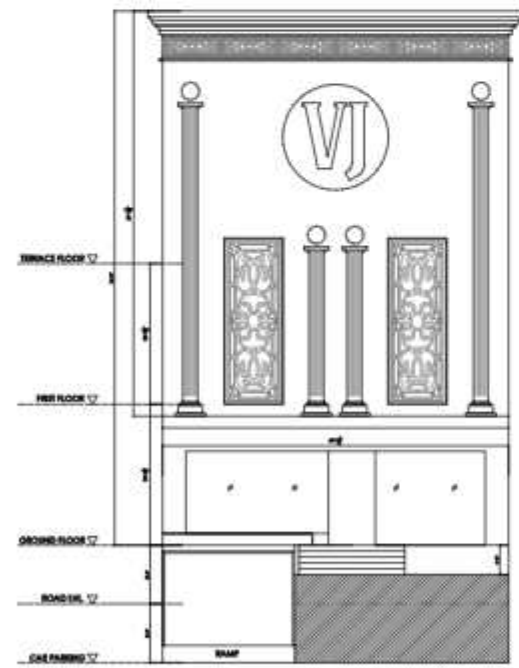


FRONT ELEVATION
OPTION - 05

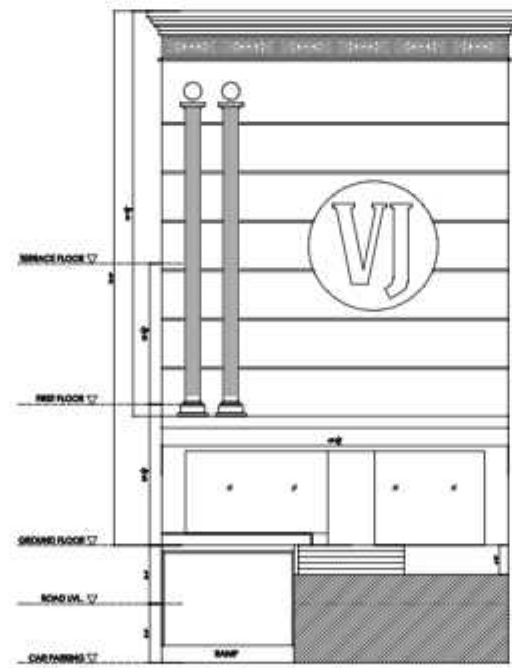

FRONT ELEVATION
OPTION - 06

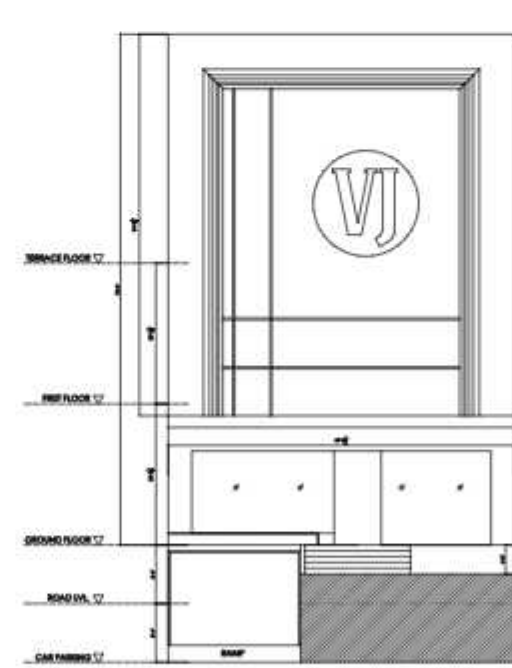

FRONT ELEVATION
OPTION - 07

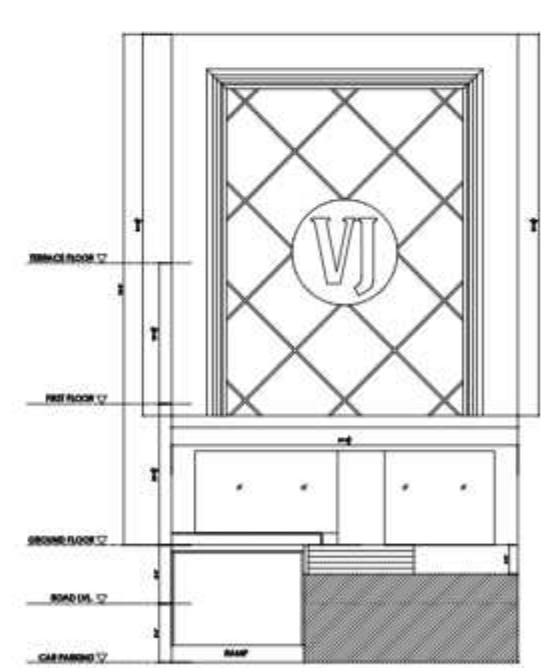


FRONT ELEVATION
OPTION - 08


DRG.TITLE	DATE : 30-09-2022	REVISION:
FRONT ELEVATION	SCALE : TO FIT	
DRG.NO	DRAWN : KIRUBA SHANKARI	CHECKED BY:
PL - 01		

PROJECT:


VIMALA JEWELLERS
AT MANALI




ANSARI ARCHITECTS,
G-3, NANDA APARTMENTS,
NO.21/7A, HABIBULLAH ROAD,
T-NAGAR, CHENNAI-17,
PH - 28342879 ,28343402

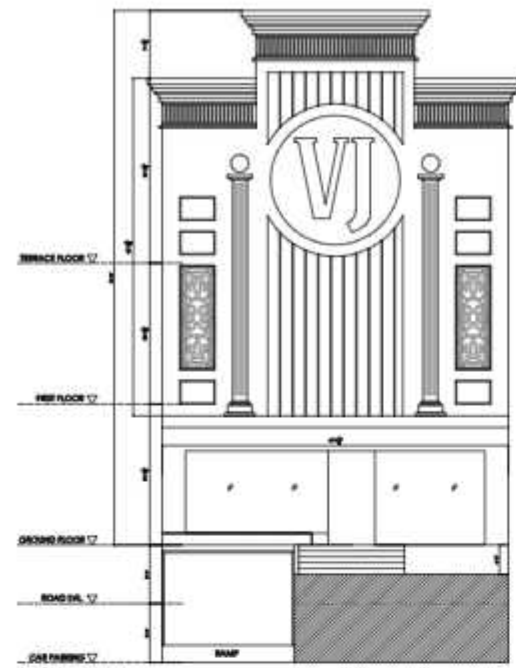


FRONT ELEVATION
OPTION - 09

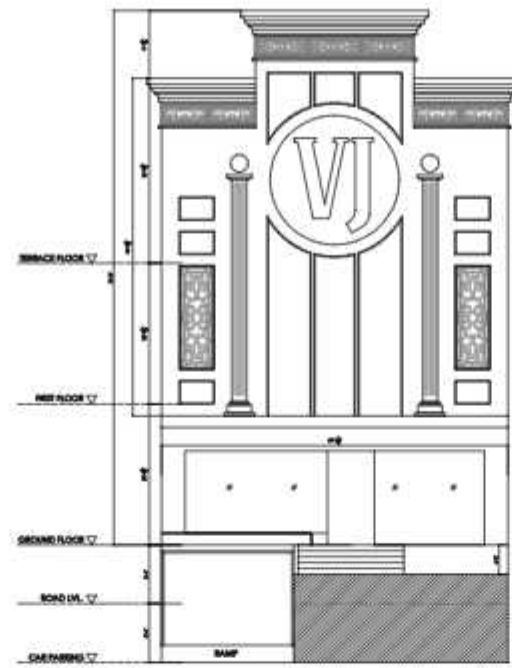


FRONT ELEVATION
OPTION - 10

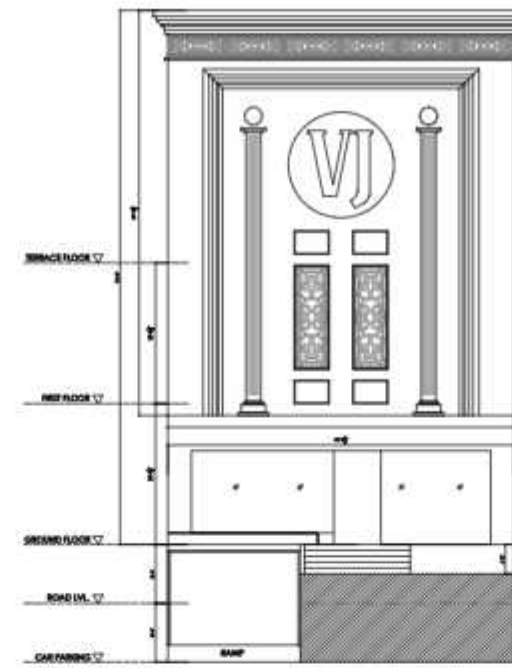


FRONT ELEVATION
OPTION - 11

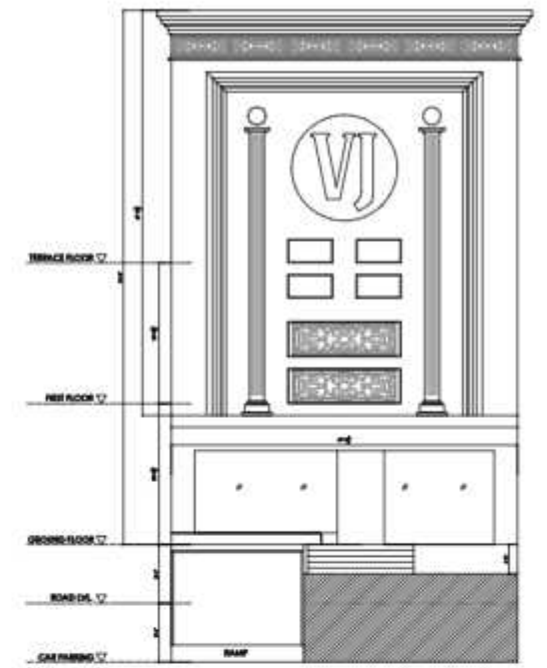


FRONT ELEVATION
OPTION - 12

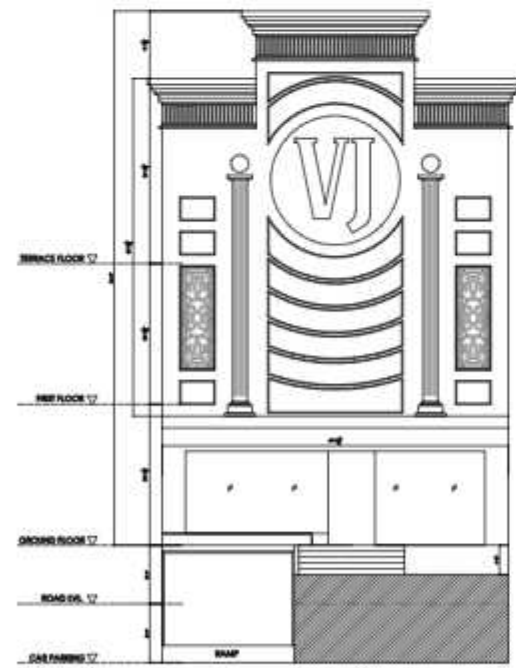


FRONT ELEVATION
OPTION - 13

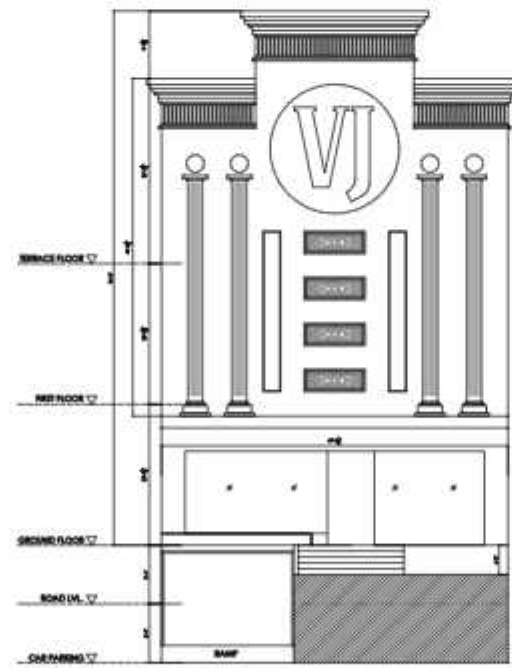

FRONT ELEVATION
OPTION - 14

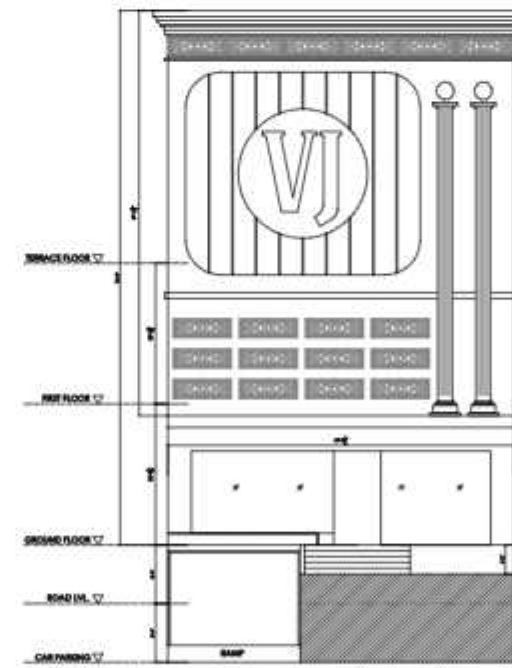

FRONT ELEVATION
OPTION - 15

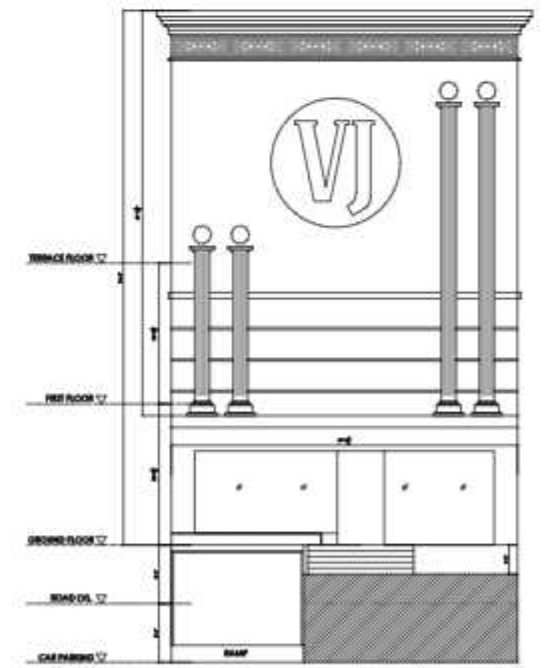






FRONT ELEVATION
OPTION - 16










DRG.TITLE FRONT ELEVATION		DATE : 30-09-2022	REVISION:						PROJECT: VIMALA JEWELLERS AT MANALI		ANSARI ARCHITECTS, G-3, NANDA APARTMENTS, NO.21/7A, HABIBULLAH ROAD, T-NAGAR,CHENNAI-17, PH - 28342879 ,28343402
		SCALE : TO FIT									
DRG.NO PL - 02	DRAWN : KIRUBA SHANKARI		CHECKED BY:								




MR. NANDHAKUMAR RESIDENCE AT VIRUDHUNAGAR - 2D ELEVATIONS FOR WALL ELECTRICALS











16 A 3PIN SWITCHED SOCKET			SURFACE MOUNT LED			16A 3PIN SWITCHED SOCKET	
16 A 3PIN SOCKET			BED LAMP WITHOUT SWITCH	3'0" LVL		16A 3PIN SOCKET	
6A 3 PIN SWITCHED SOCKET			BED SIDE LOCAL CONTROL BOARD	2'0" LVL		6A 3 PIN SWITCHED SOCKET	
LOCAL CONTROL BOARD	4'0" LVL		FOOT LAMP	1'0" LVL		6A 3PIN SOCKET	
DISTRIBUTION BOARD	2'0" LVL		9" DIA EXHAUST FAN			LOCAL CONTROL BOARD	
T.V ANTENNA SOCKET	2'0" LVL		WALL MOUNT FAN	6'6" LVL		AUTOMATION KEYPAD	
TELEPHONE SOCKET	@9" ABOVE LINTEL		WARDROBE LIGHT	7'0" LVL		LOW LEVEL LIGHT (NIGHT LAMP)	
WALL BRACKET			TELEPHONE JACK			T.V ANTENNA SOCKET	
CEILING DOME LIGHT FIXTURE	8'9" LVL		NETWORK LAN SOCKET			TELEPHONE SOCKET	
BELL PUSH			HDMI PORT FOR TV / PROJECTOR			NETWORK POINT	
CALLING BELL			CCTV			20A AC ON/OFF TRIP SOCKET	
BULK HEAD FITTING	2'0" LVL		WIFI ROUTER			COVE & STRIP LIGHT PROVISION	
48" SWEEP CEILING FAN			CURTAIN			WALL BRACKET & NICHE LIGHTS	
			MIRROR			UP/DOWN LIGHT	
20A METAL CLAD SOCKET -A/C			SENSOR LIGHT			STEPS LED LIGHT	
CHANDELIER LIGHT			VIDEO DOOR PHONE CAMERA			PROJECTOR CONTROLS	
NETWORK POINT			VIDEO DOOR PHONE DISPLAY			VIDEO DOOR PHONE	










- These are wall electrical drawings, provided while concreting to install necessary electrical points in the house.
- In these 2D sectional elevational drawing, positions of various electrical points like calling bell, video door phone, switch boards, sockets, DB, lamp points, etc., are marked in the walls leaving places of beams, columns.
- During this stage only we finalize whether the client goes for normal electrical points or automated electrical points.

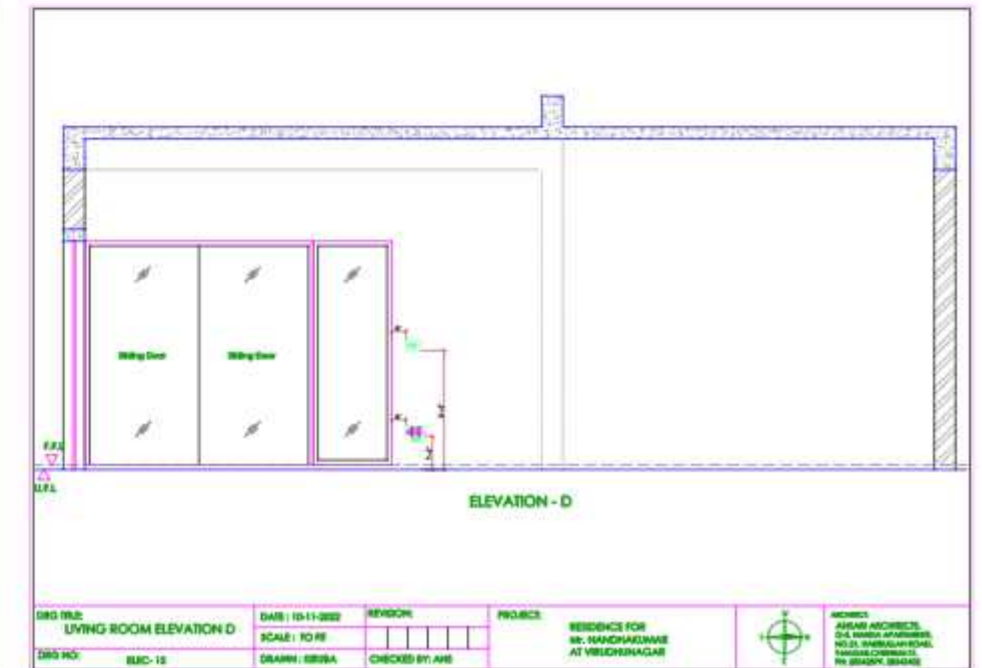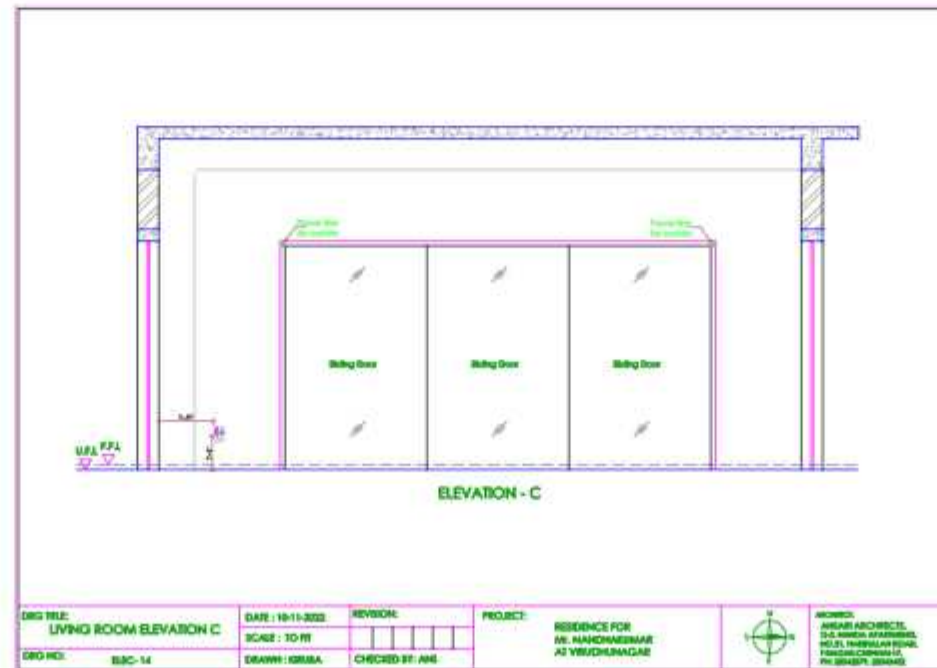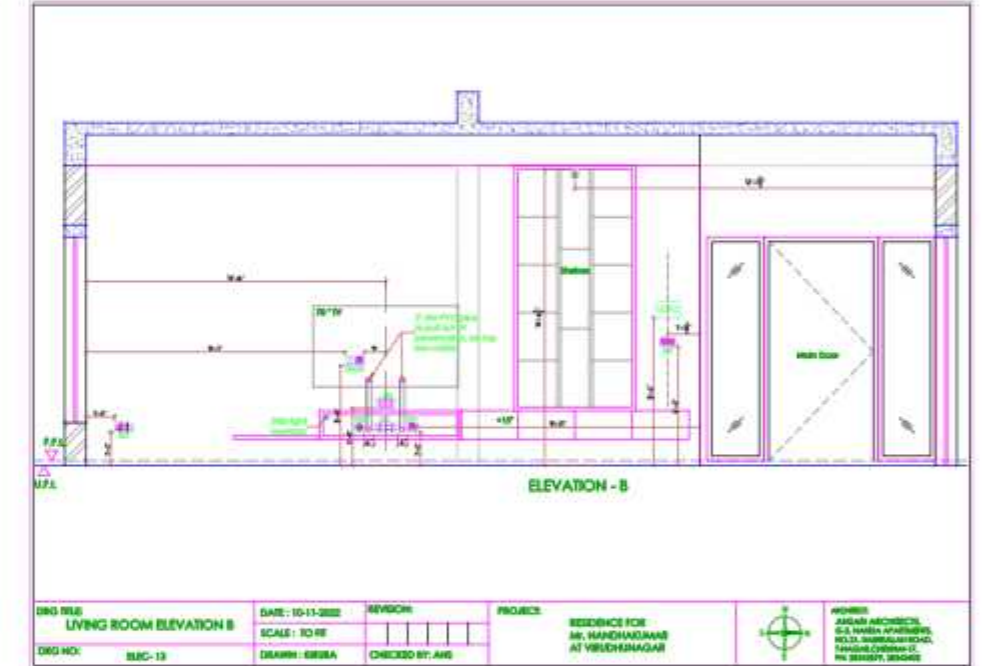
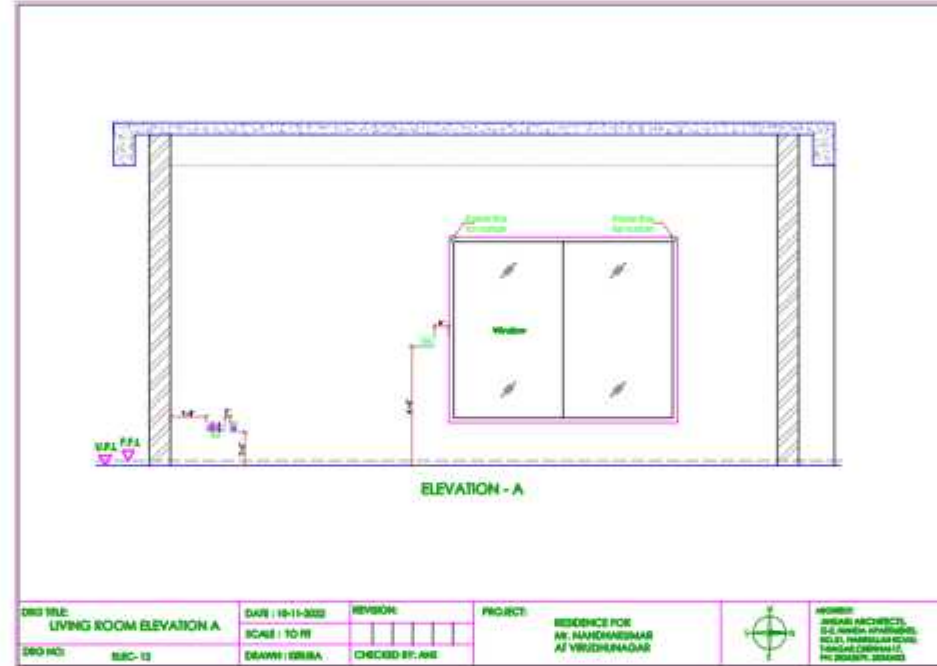
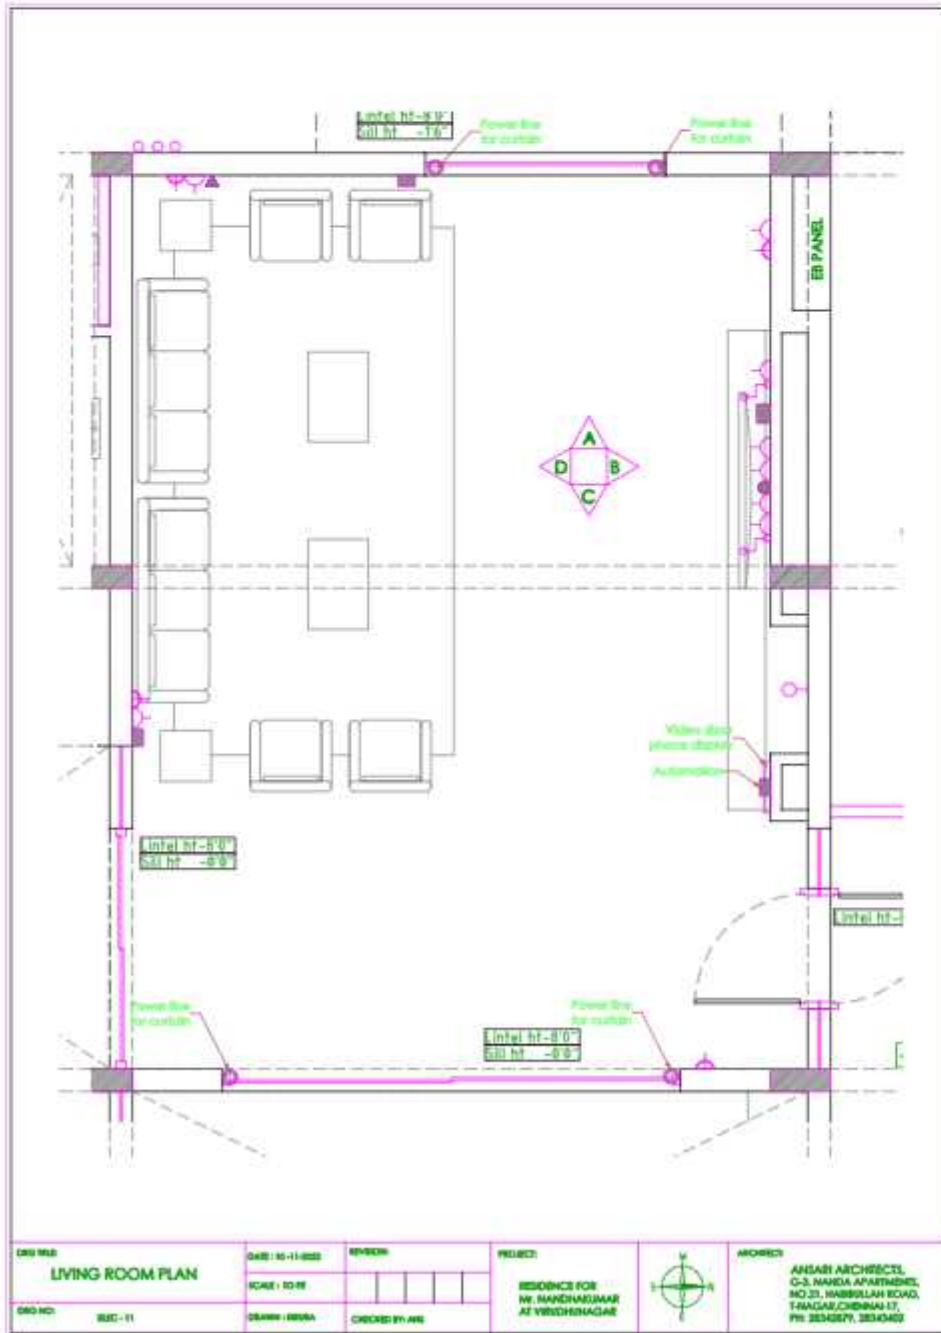


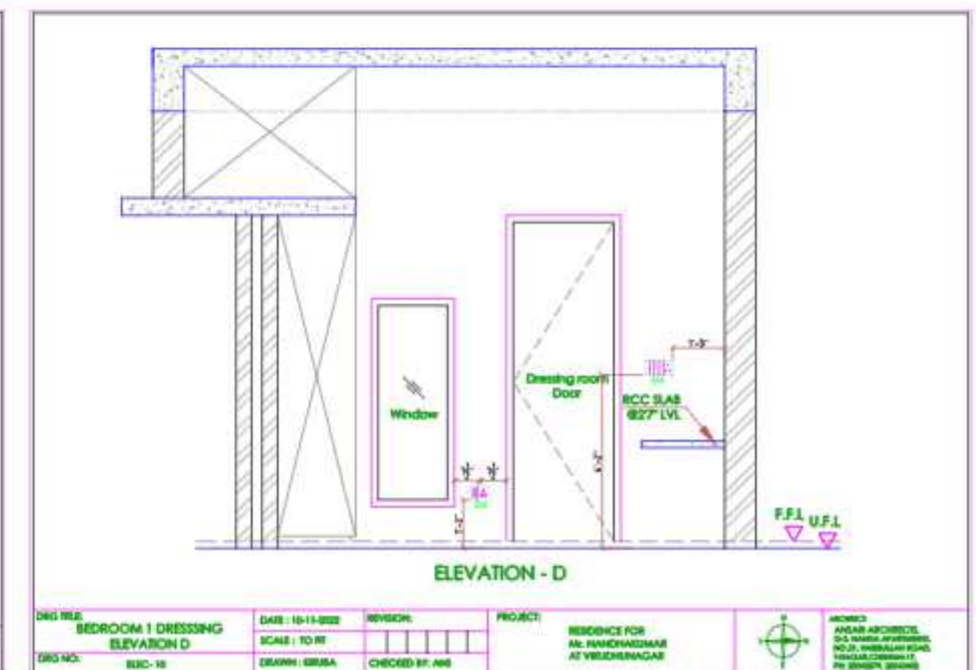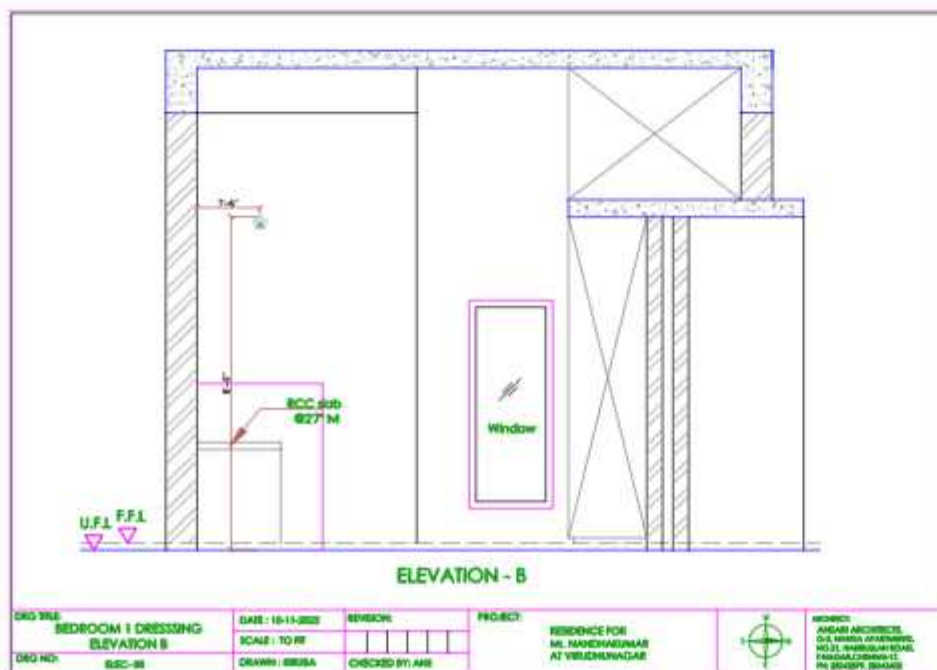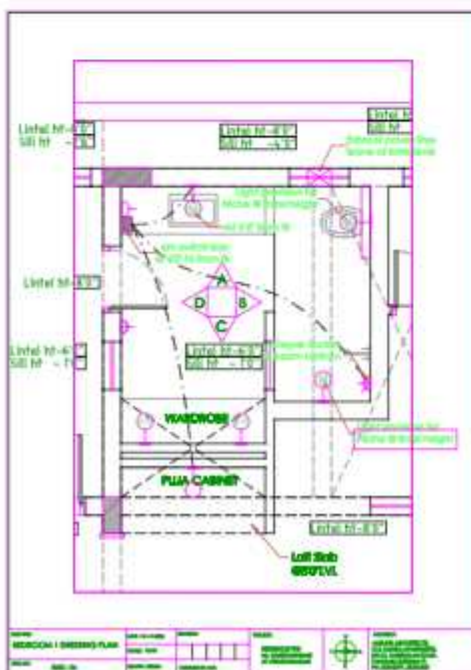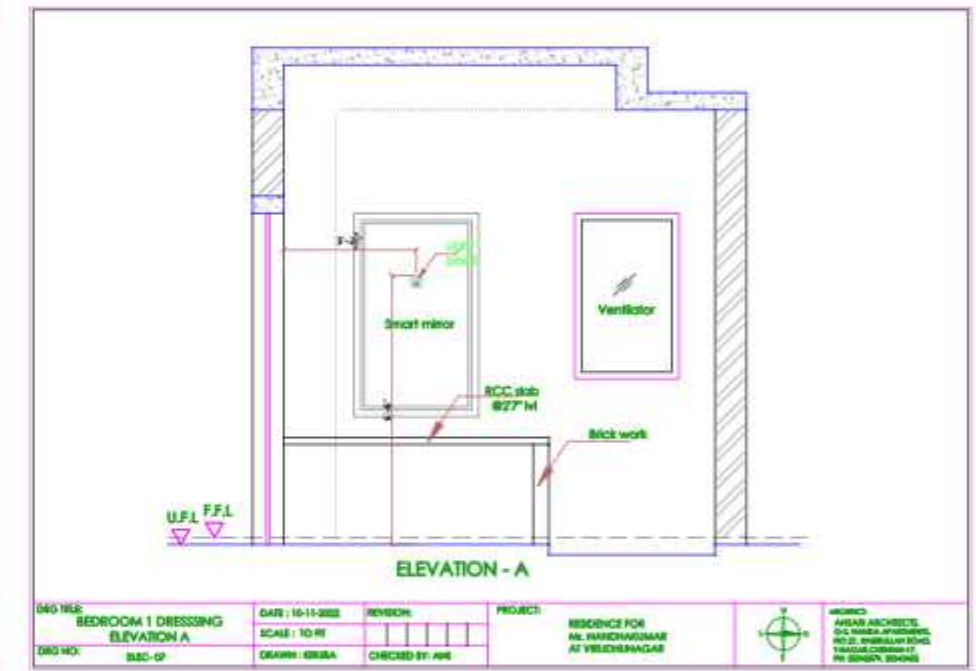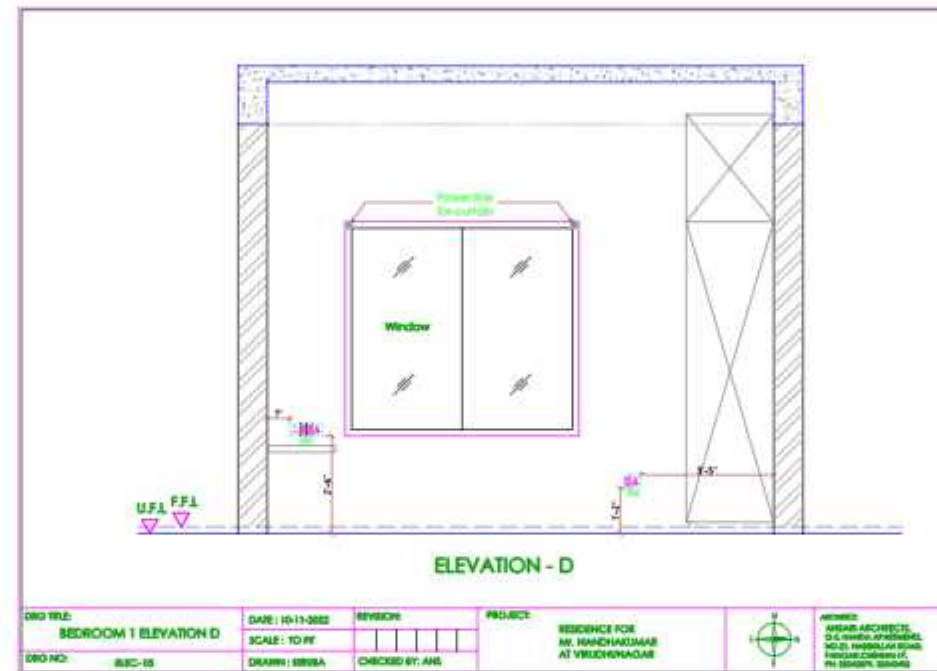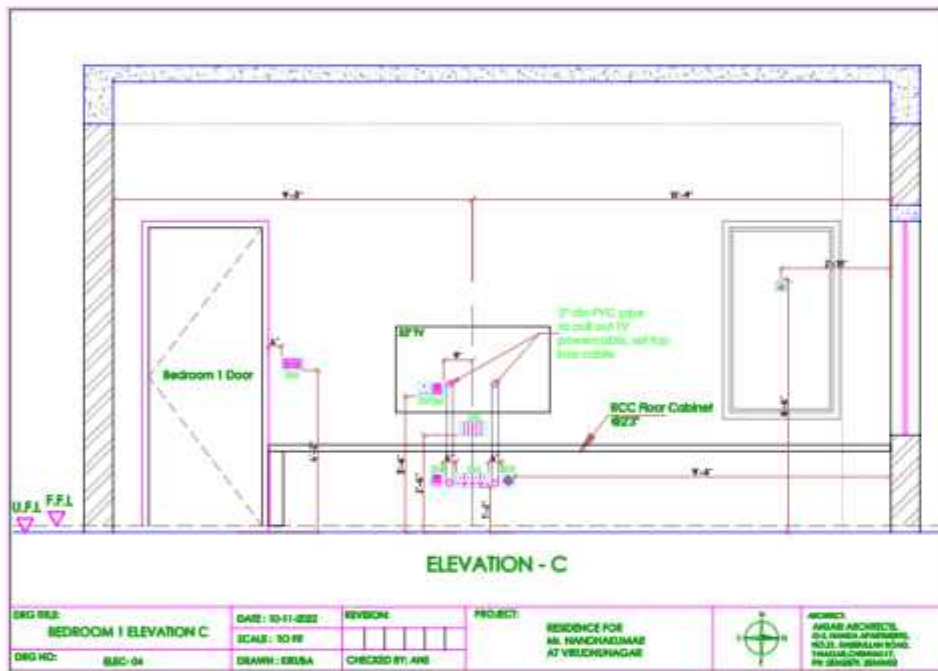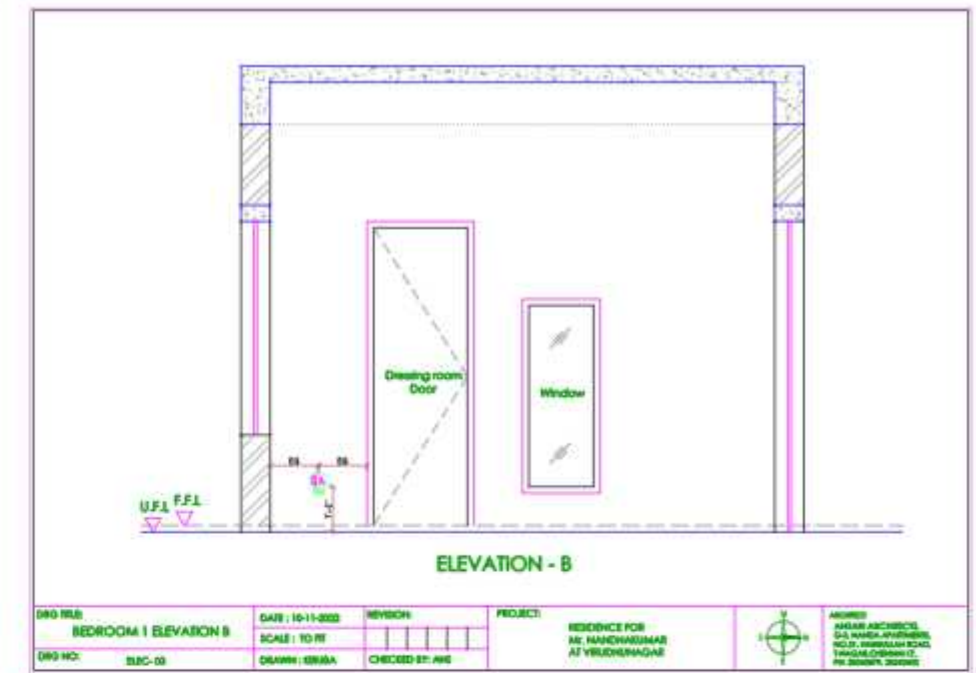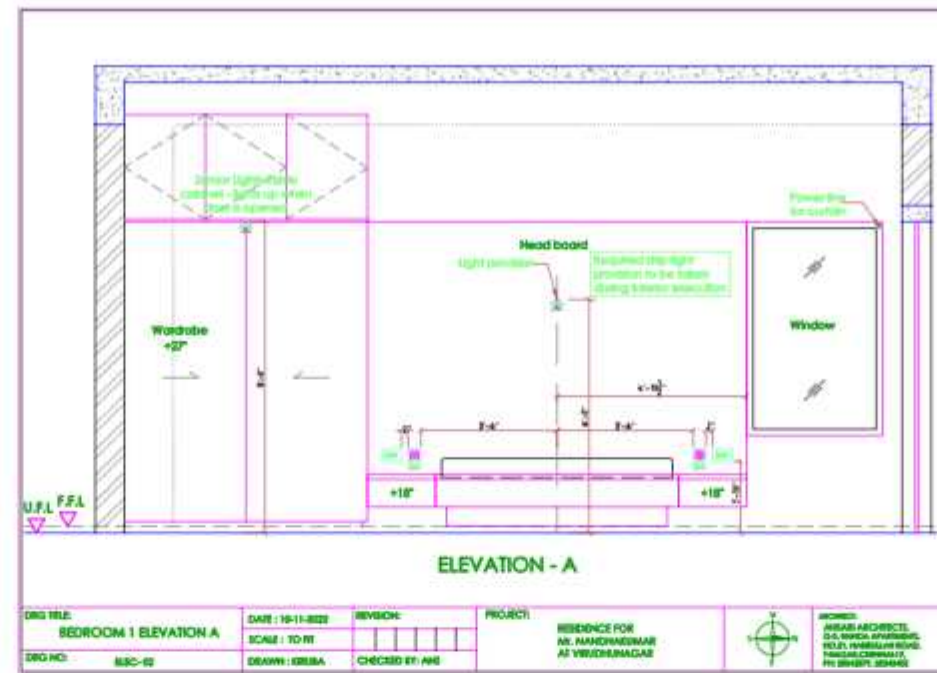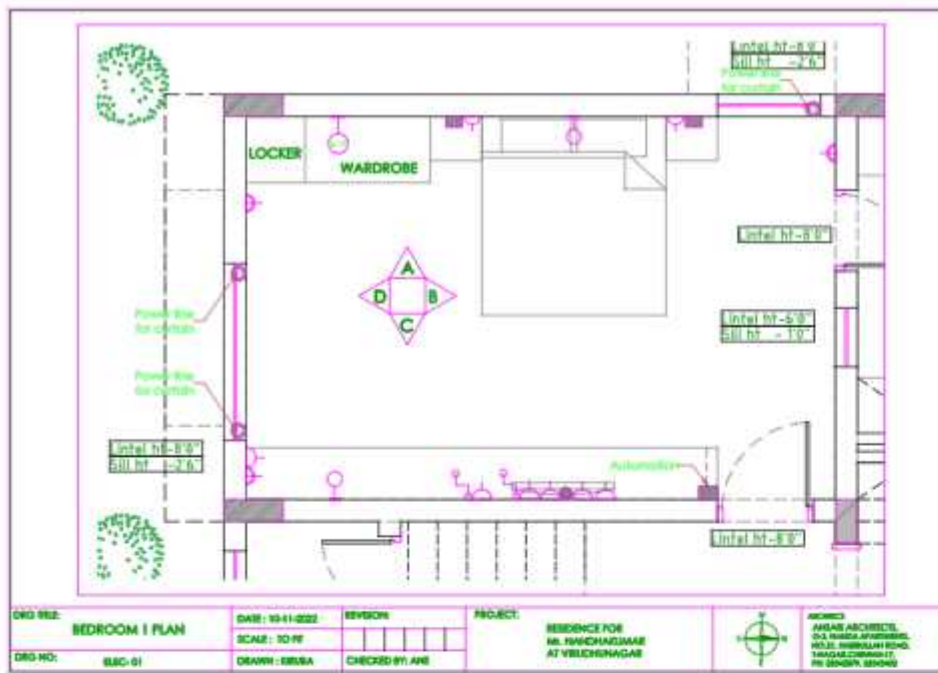


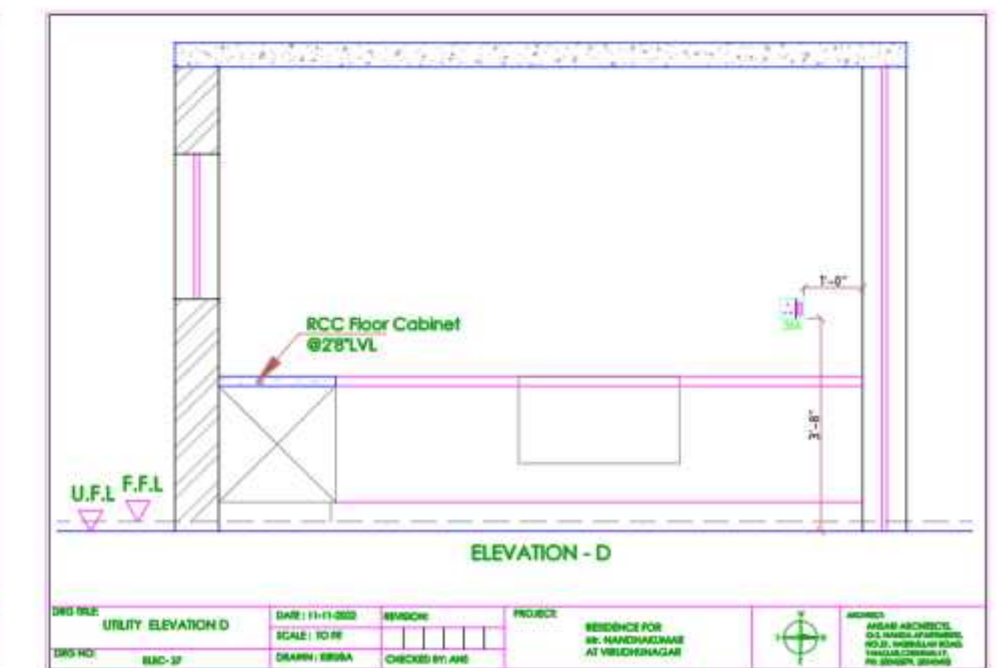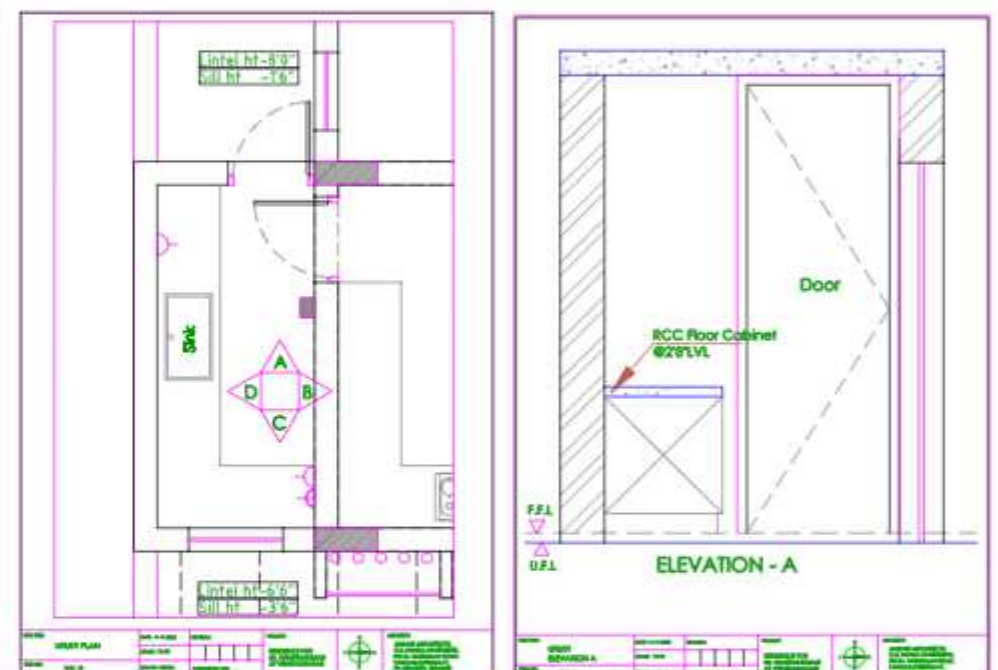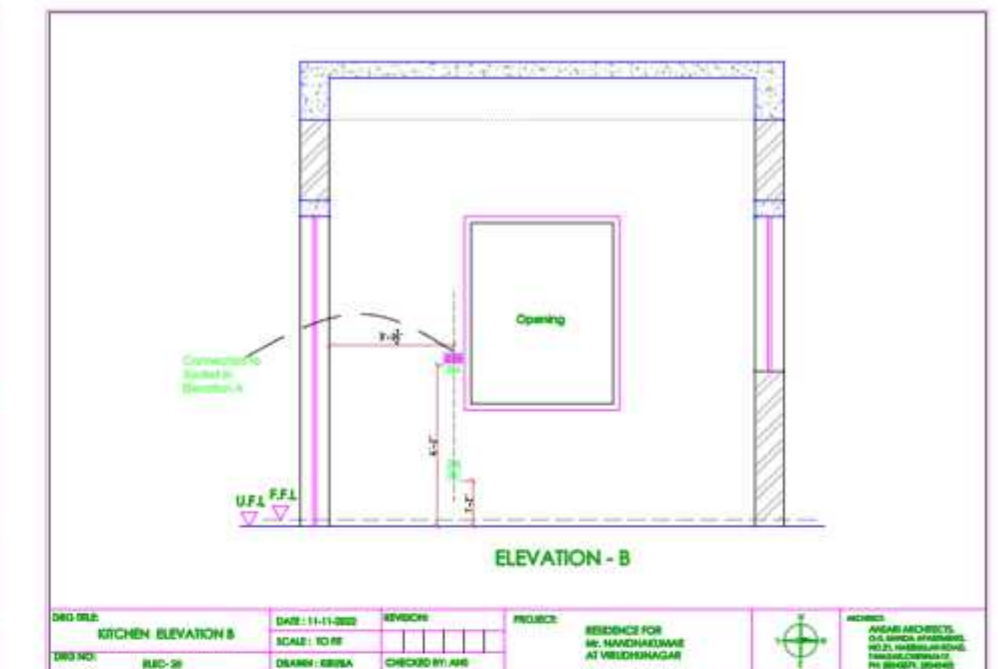

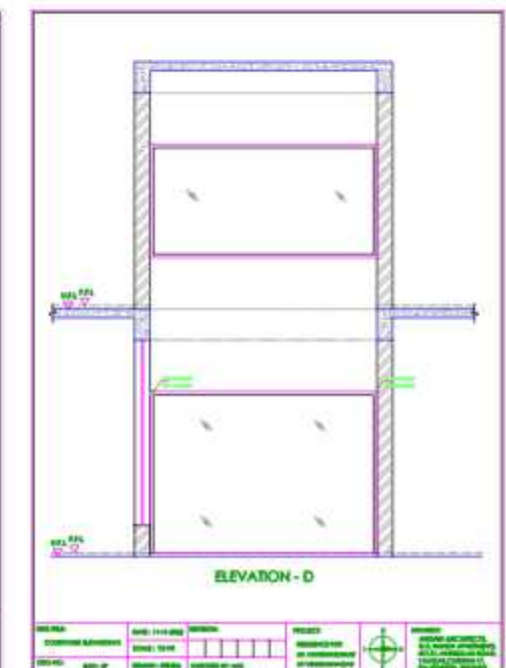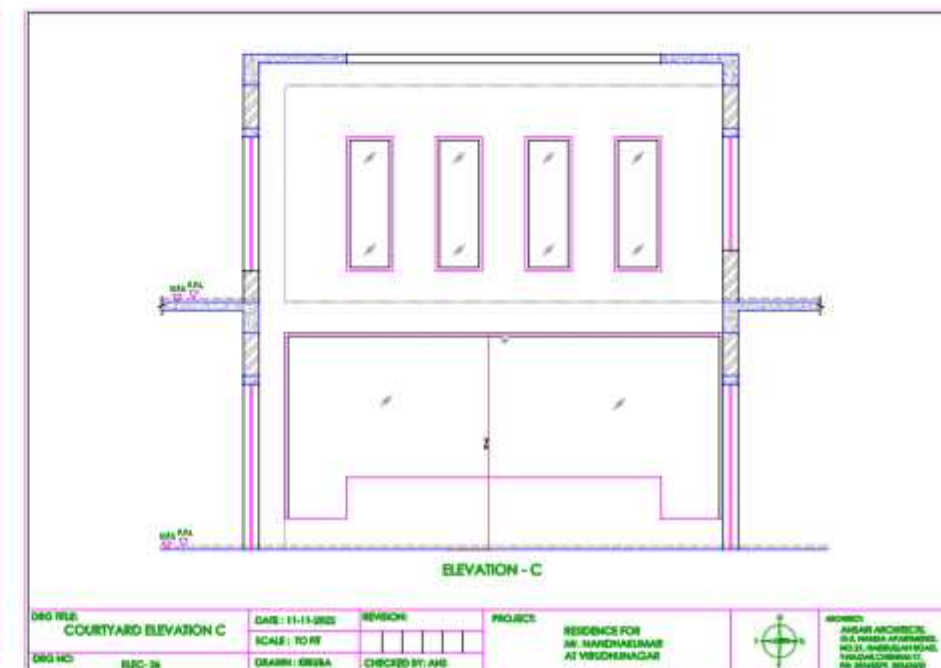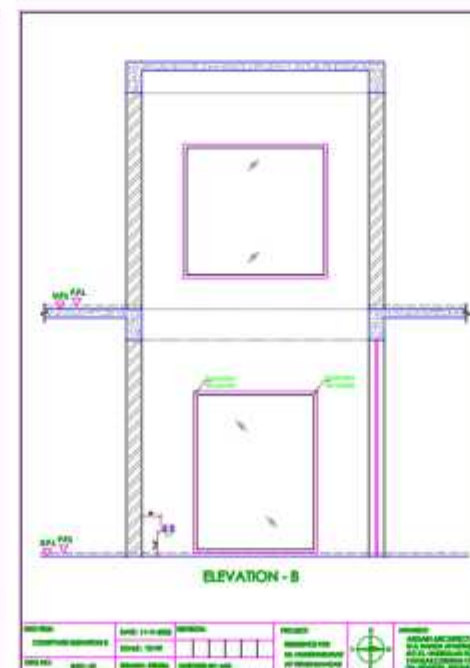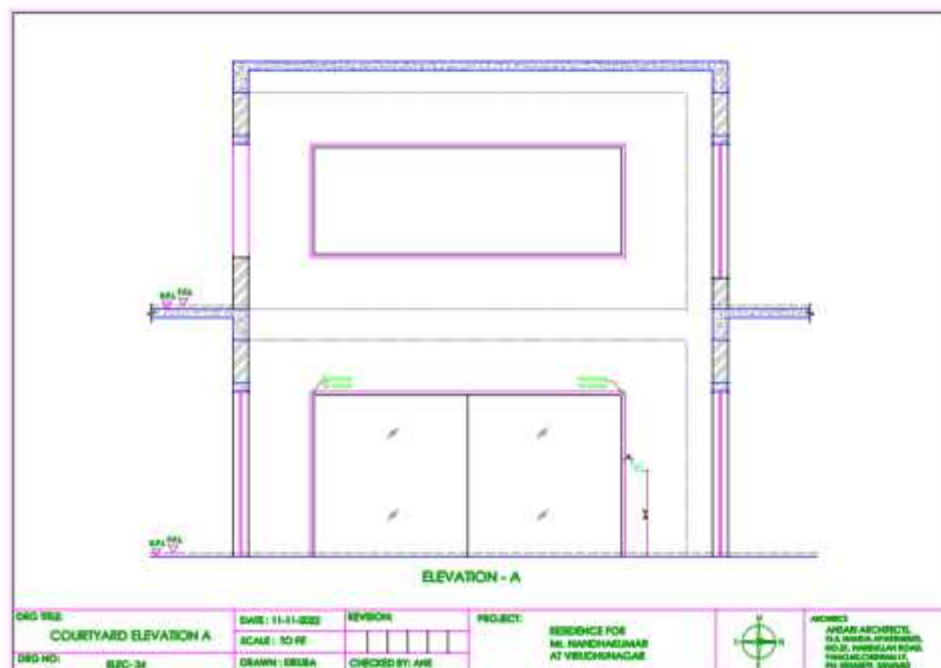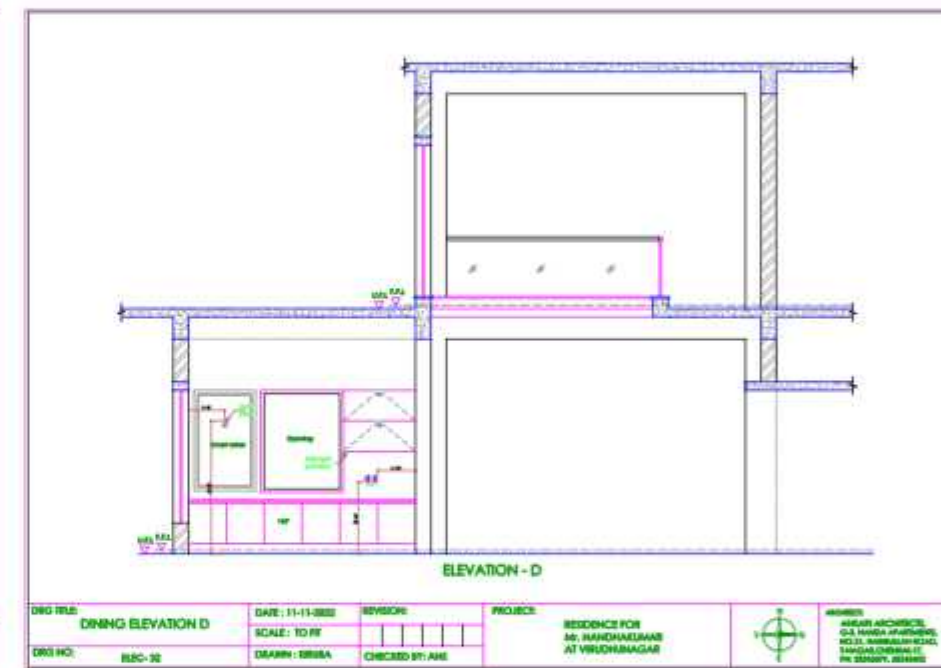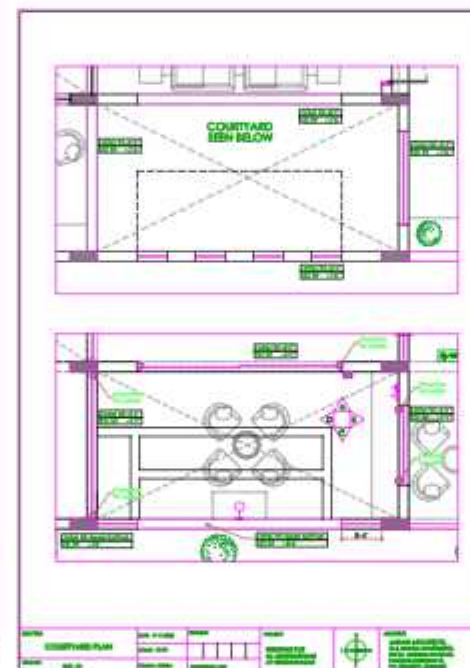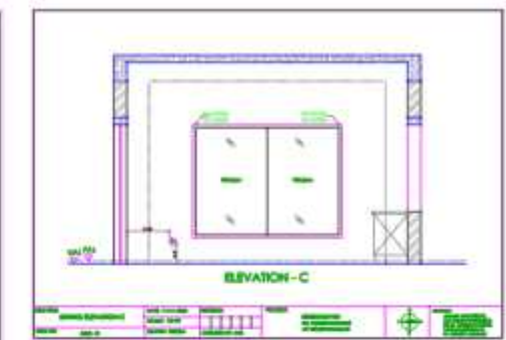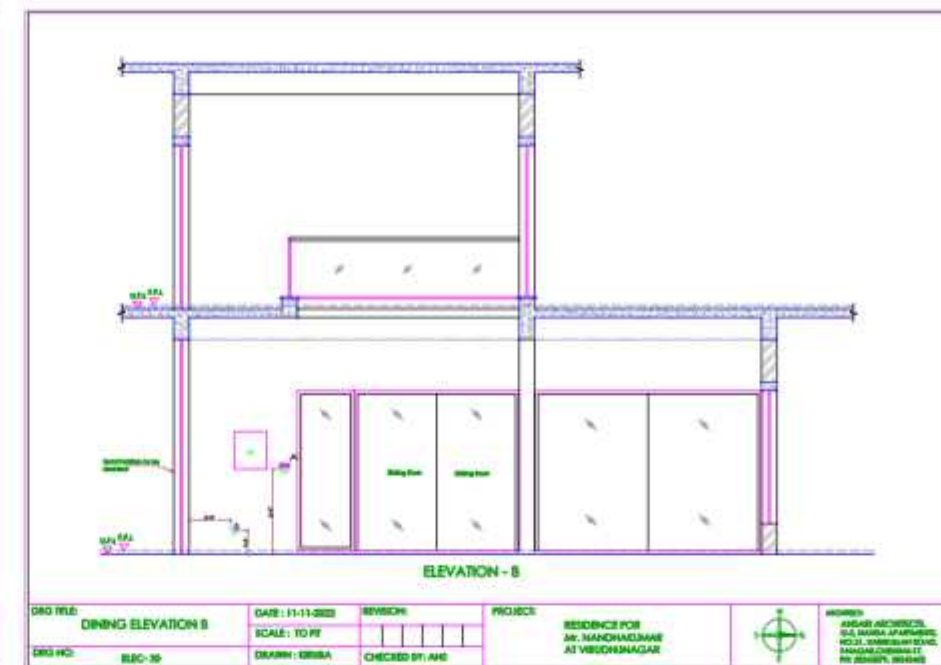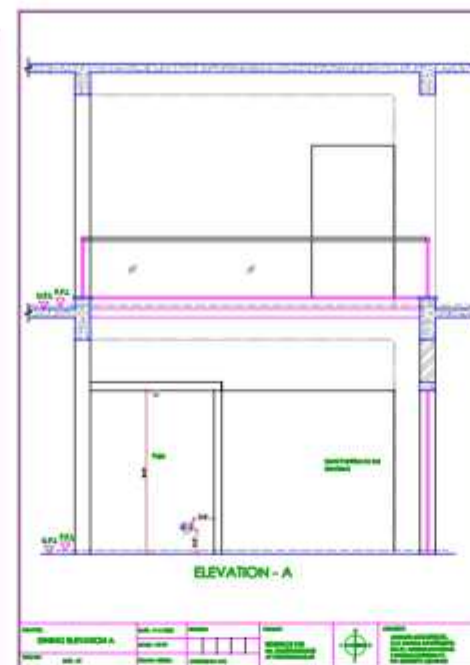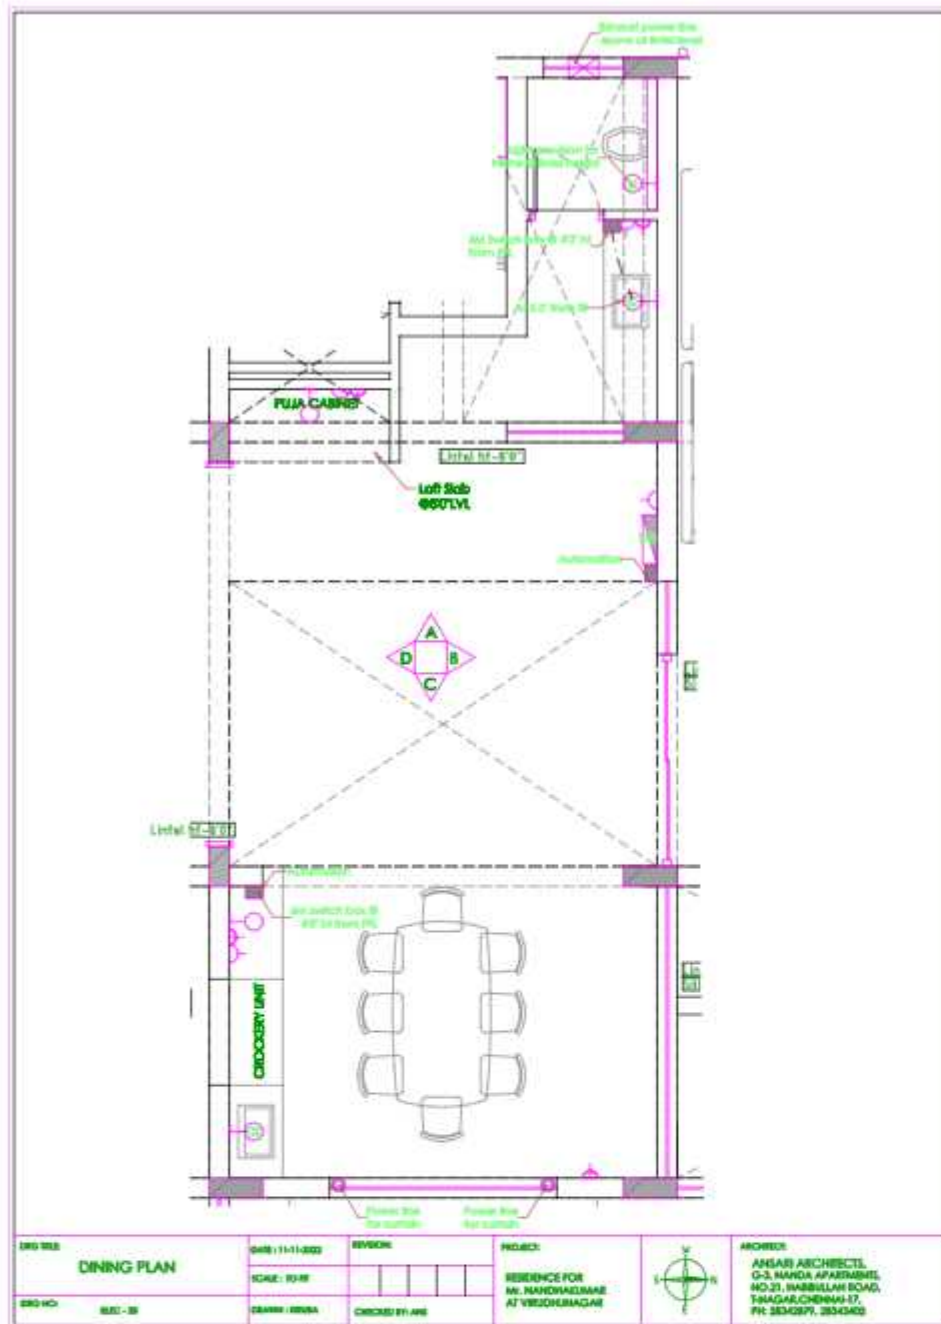


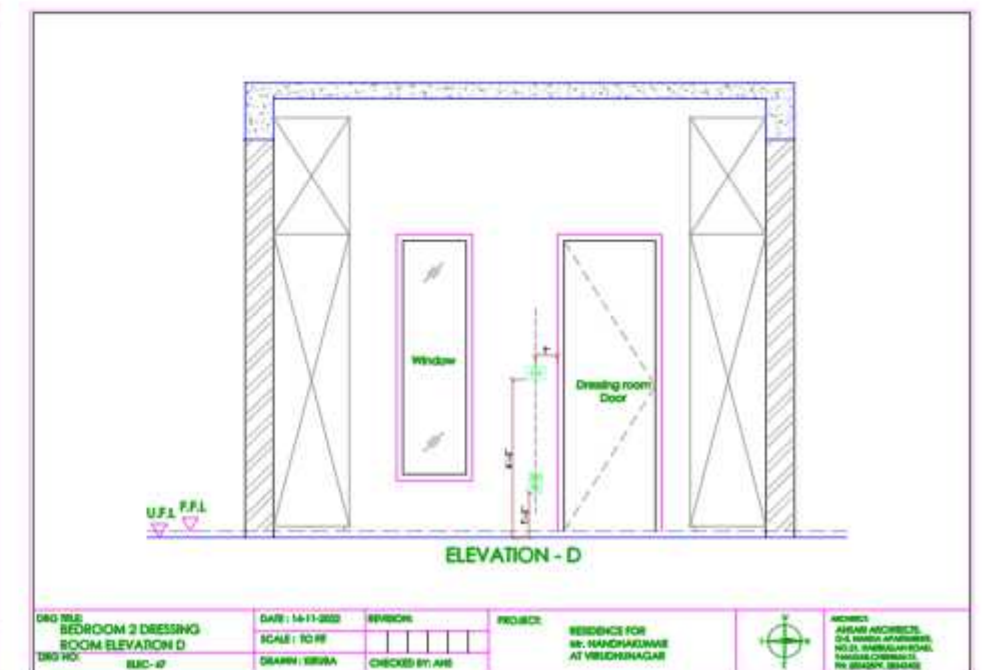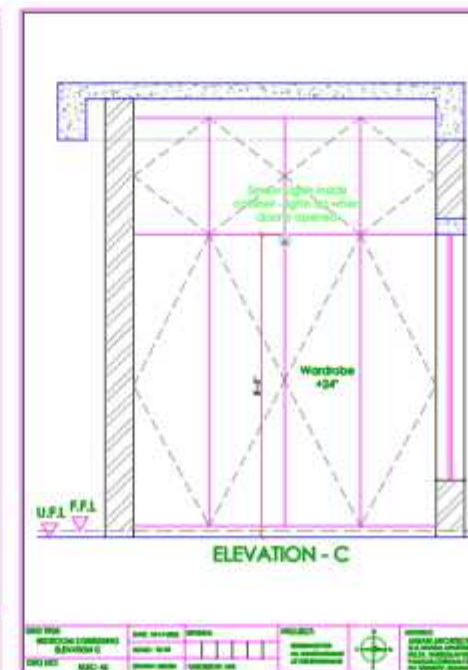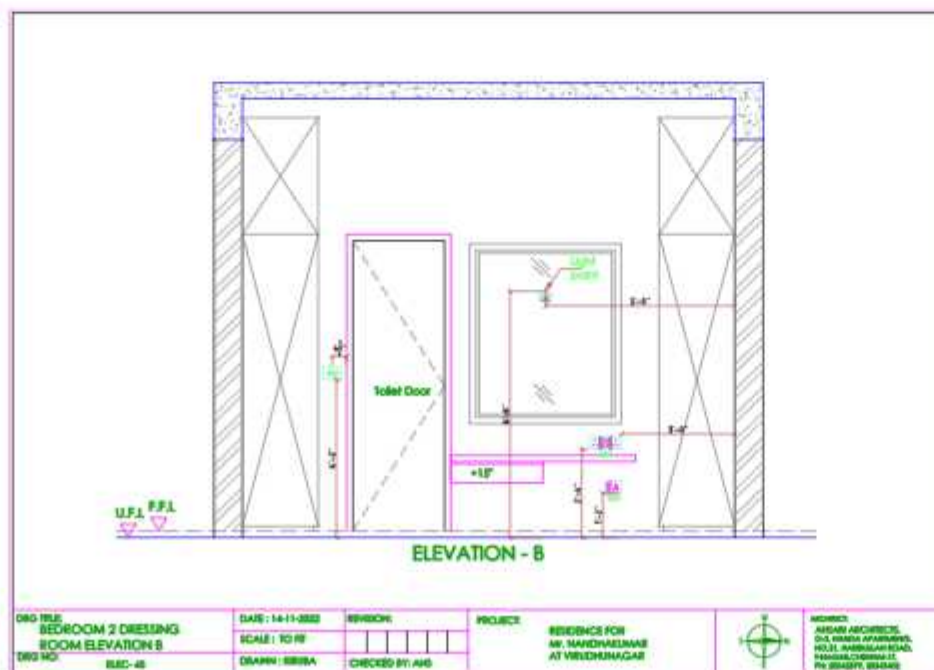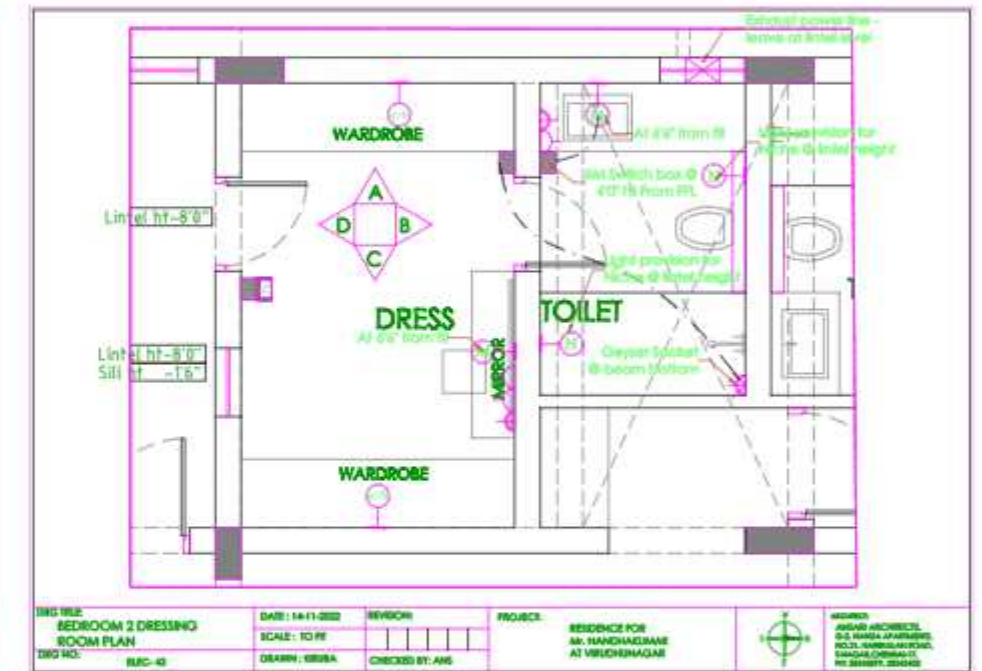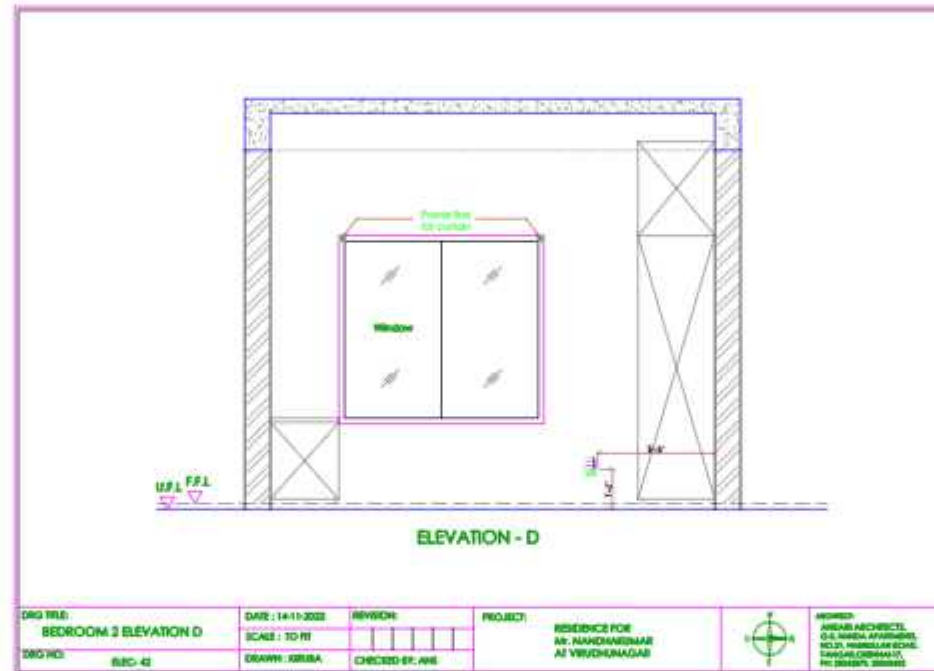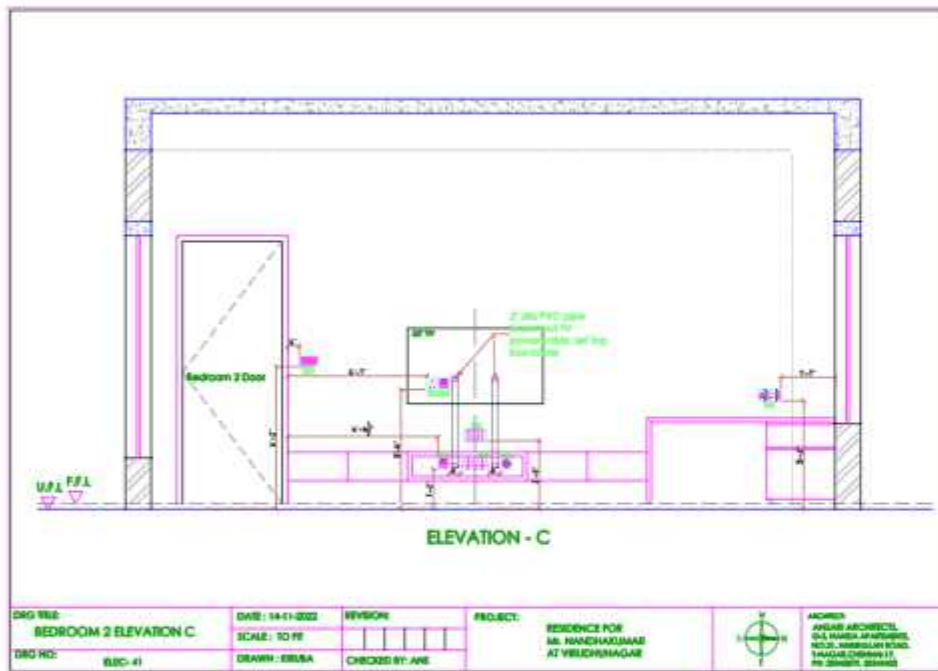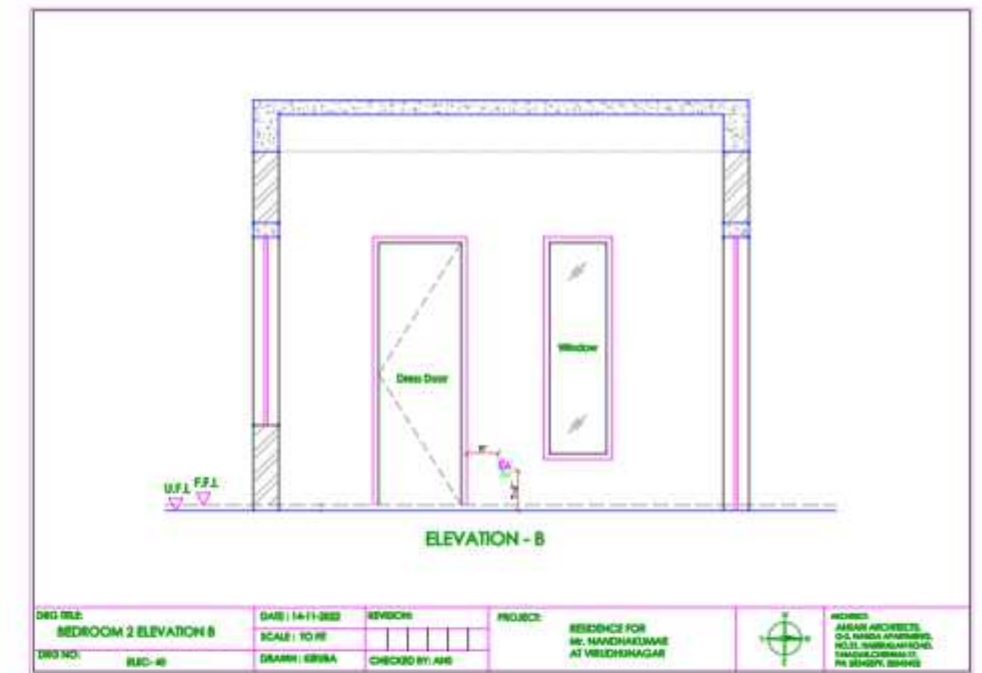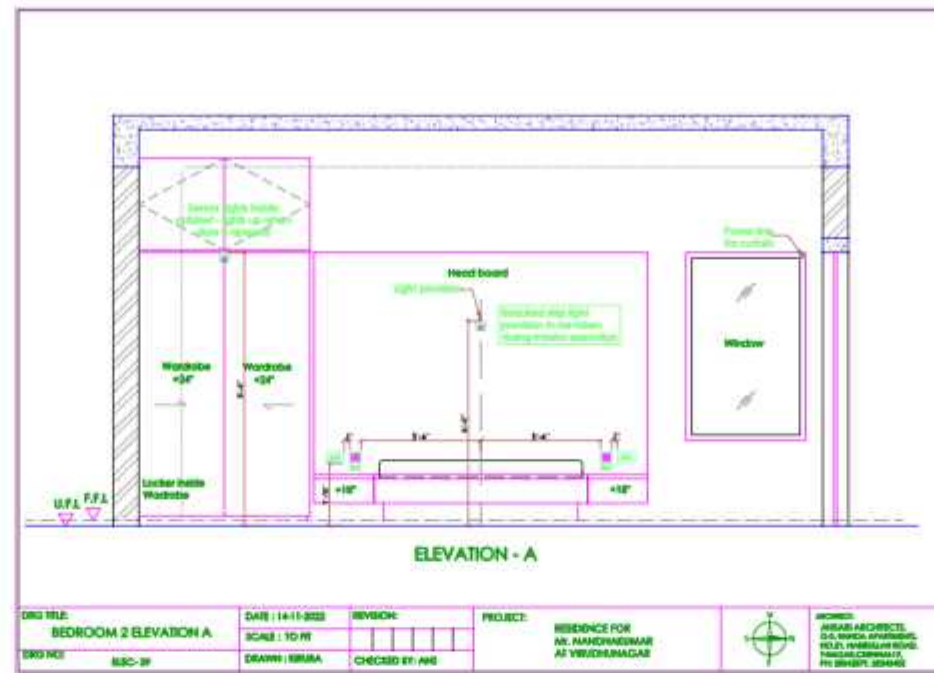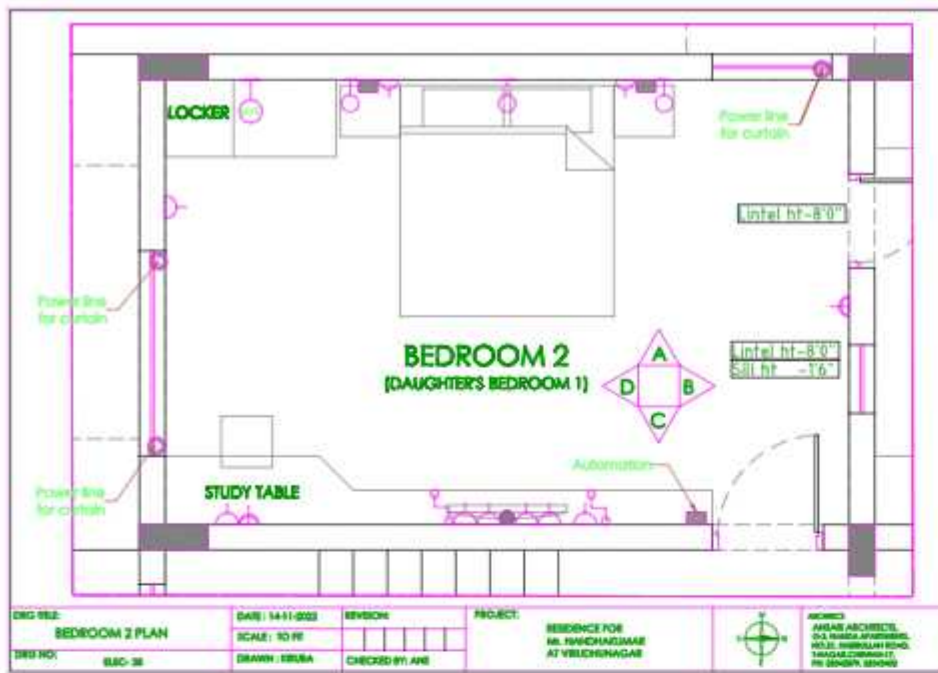

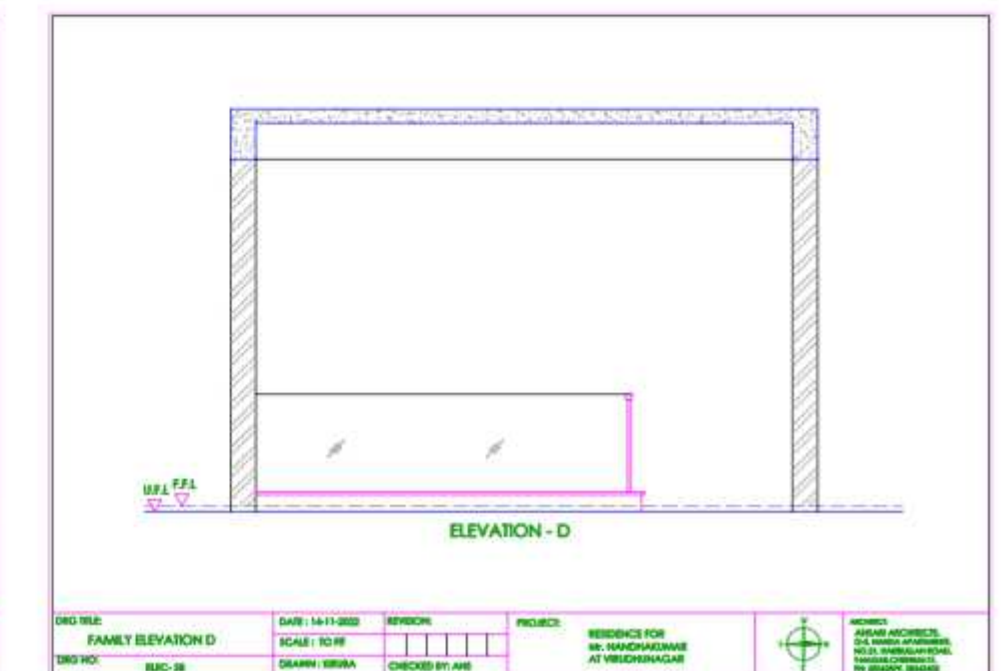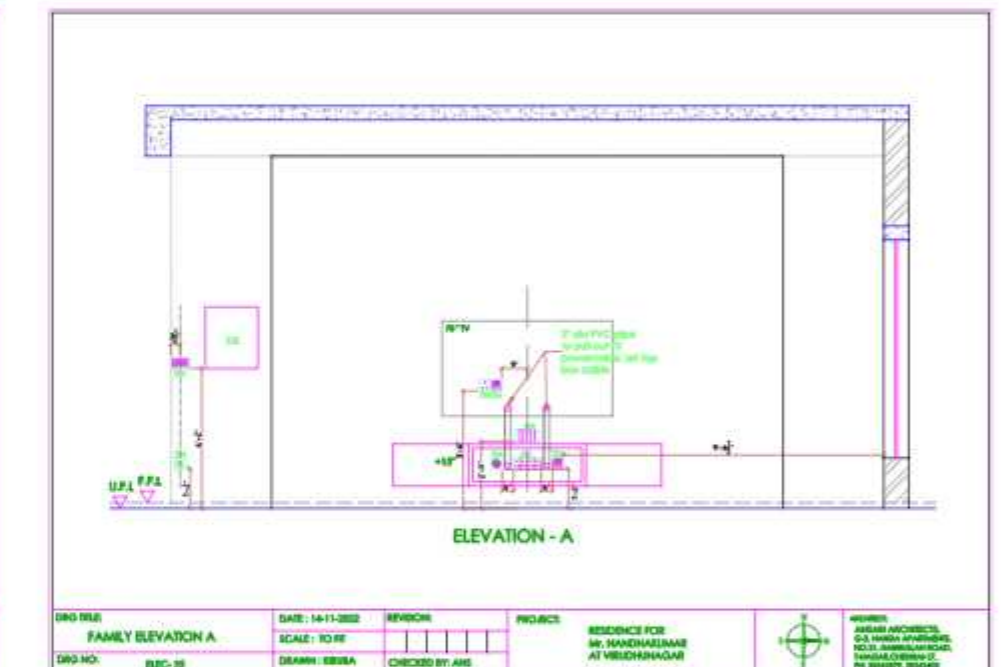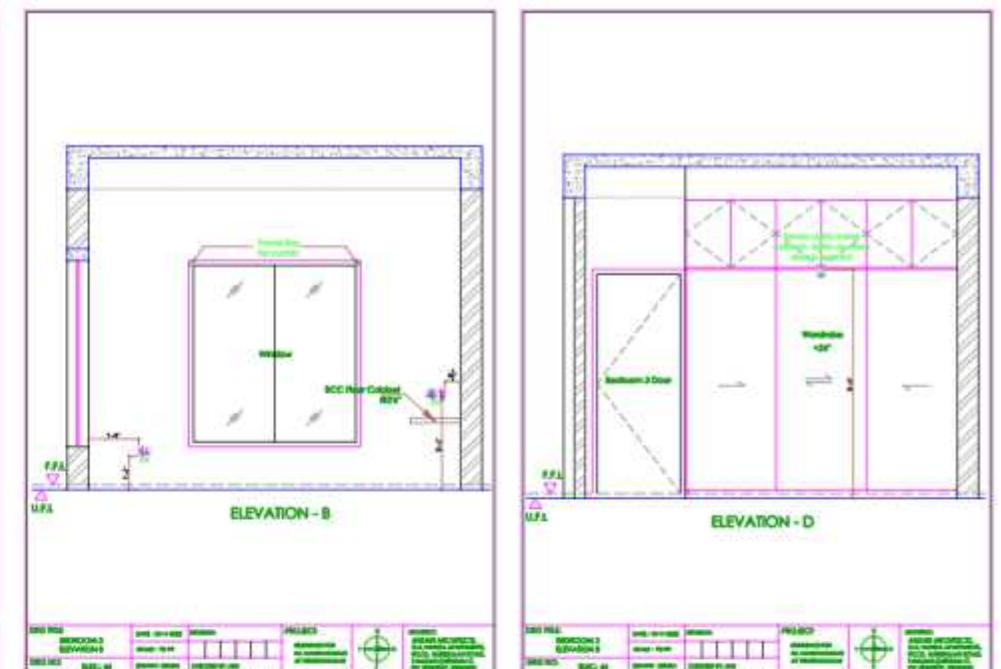

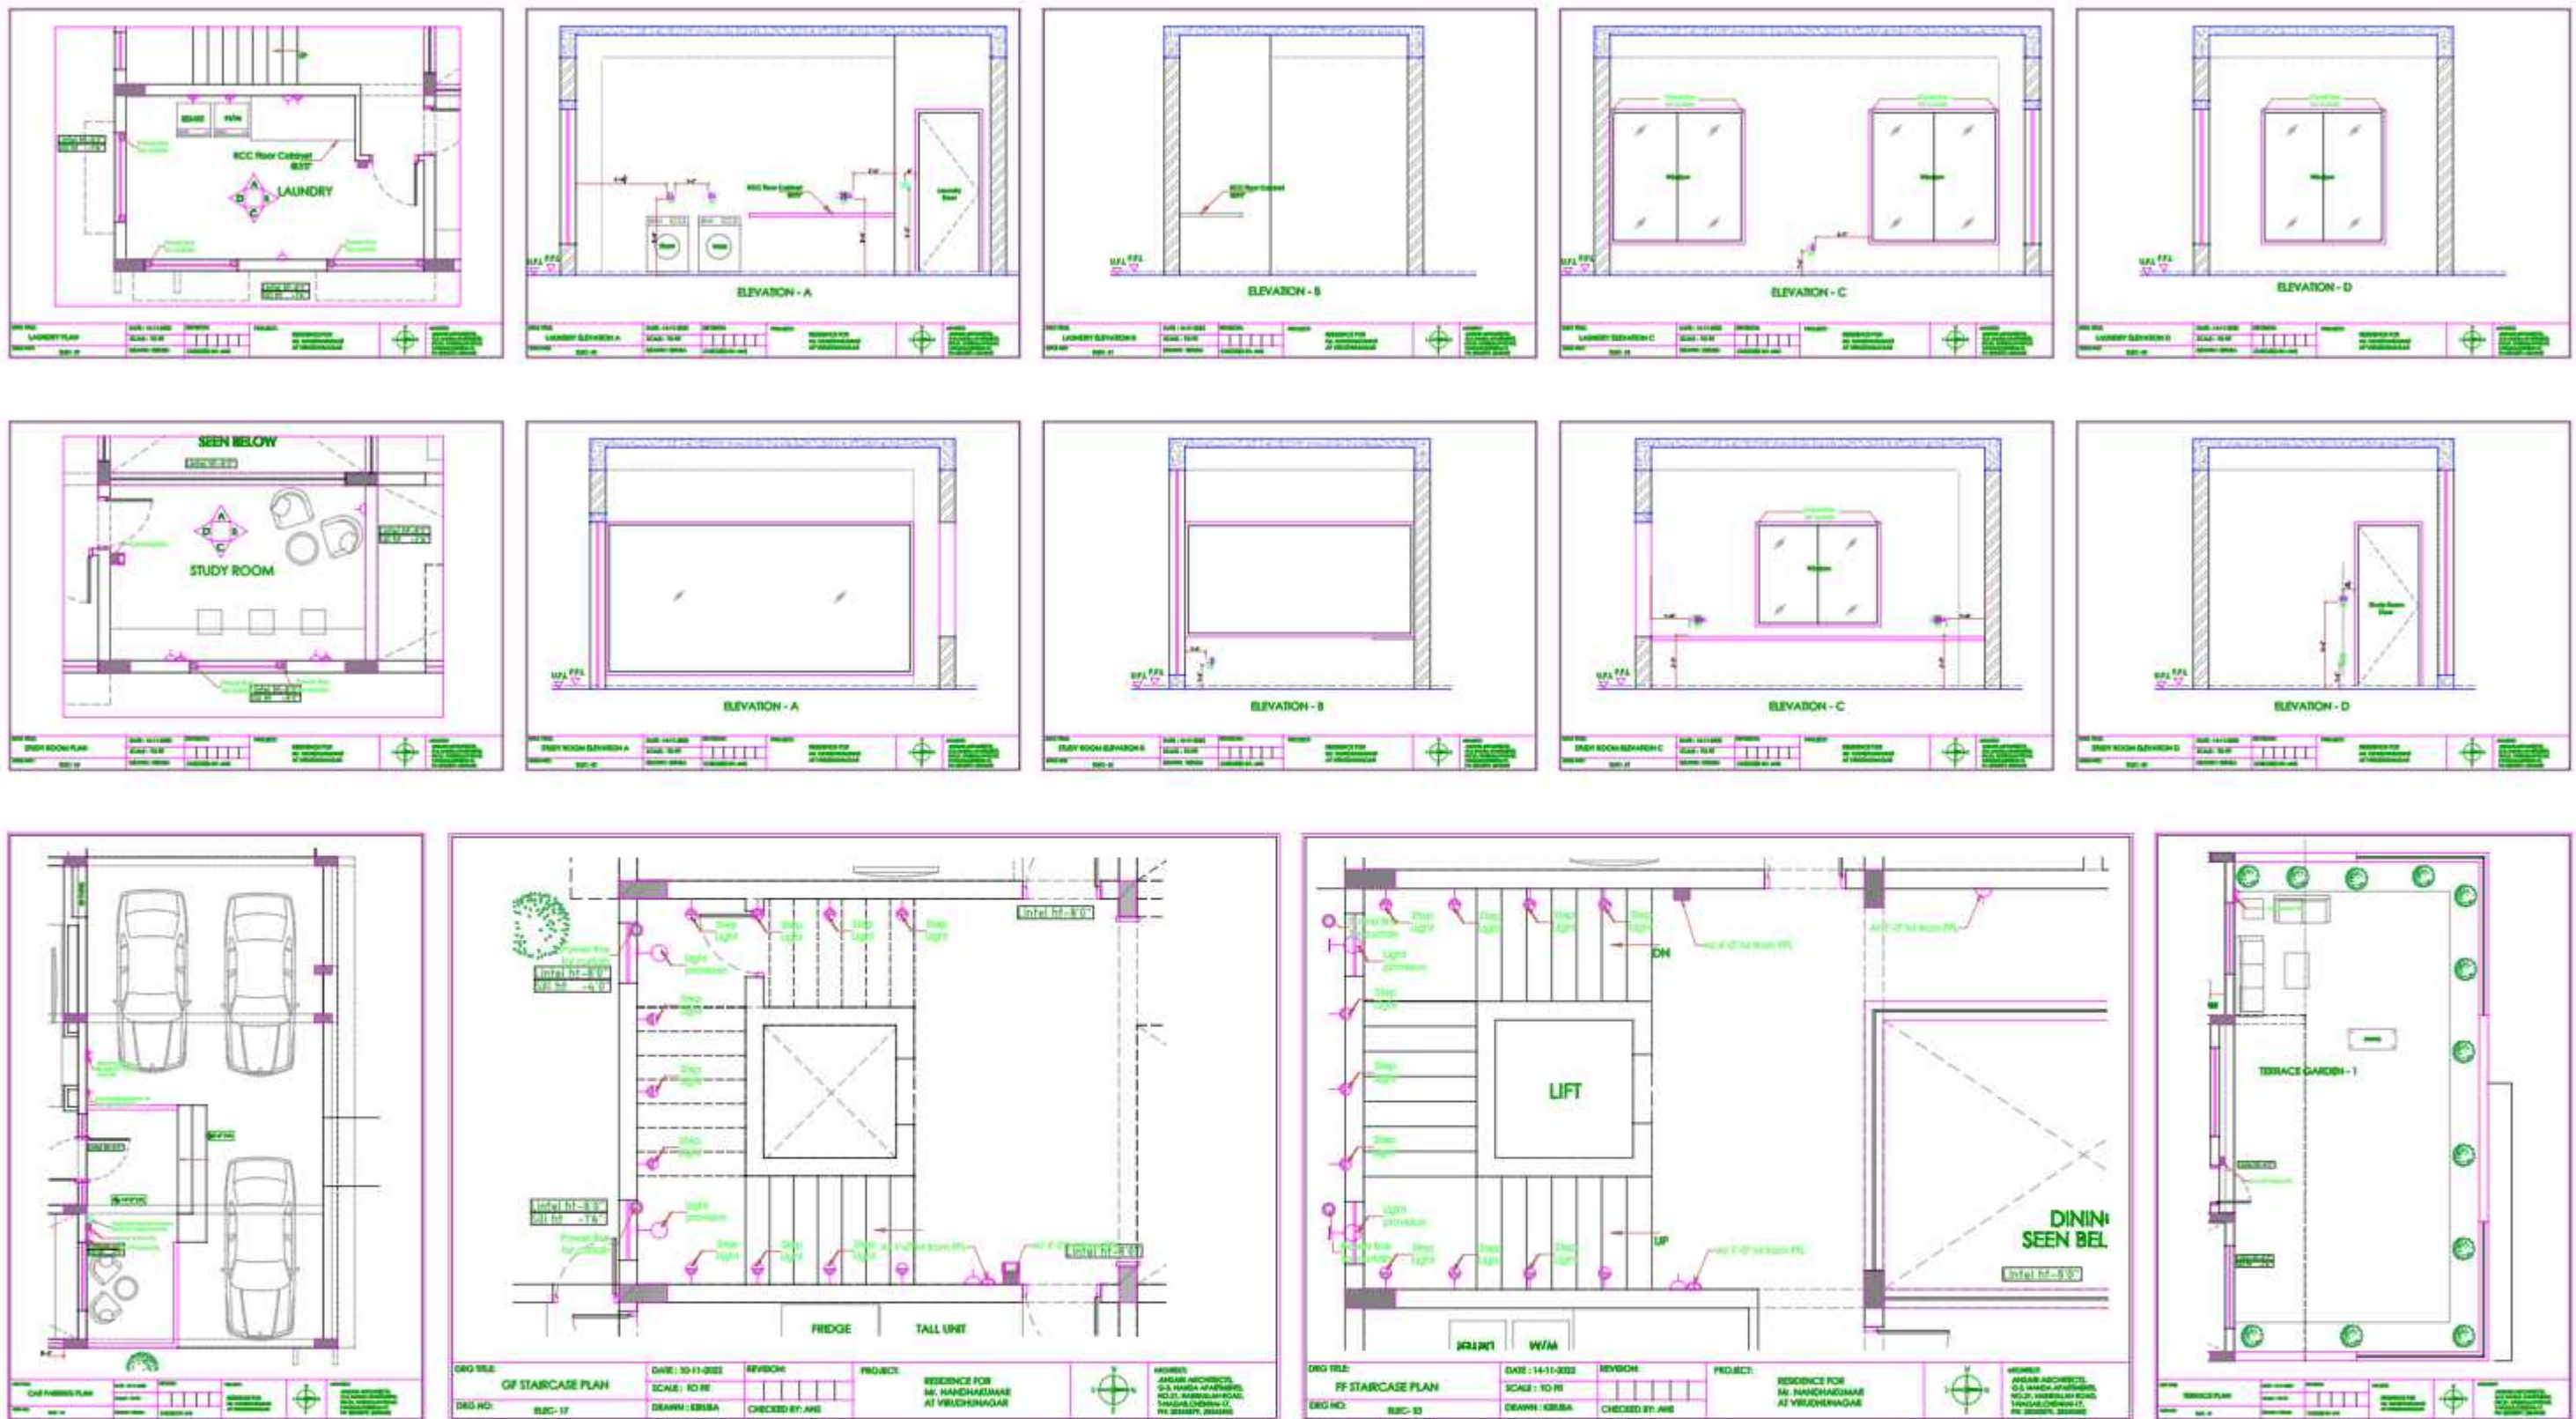

- These drawings were prepared by me very initially.
- Keeping several points in my mind like location of and number of, switches, sockets (6 amps, 16 amps), modules, internet connection, calling bell, video door phone, DB board, floor lamps, wall lamps, stair lights, points for various purposes like, mixer, grinder, RO, air conditioner, etc., and their proximities between them and for usage.
- Whether the client is going for normal system or automated system or semi automated system will be finalised.
- I understood basics of electrical points and on - site features of the building to be considered which affects several factors while designing.

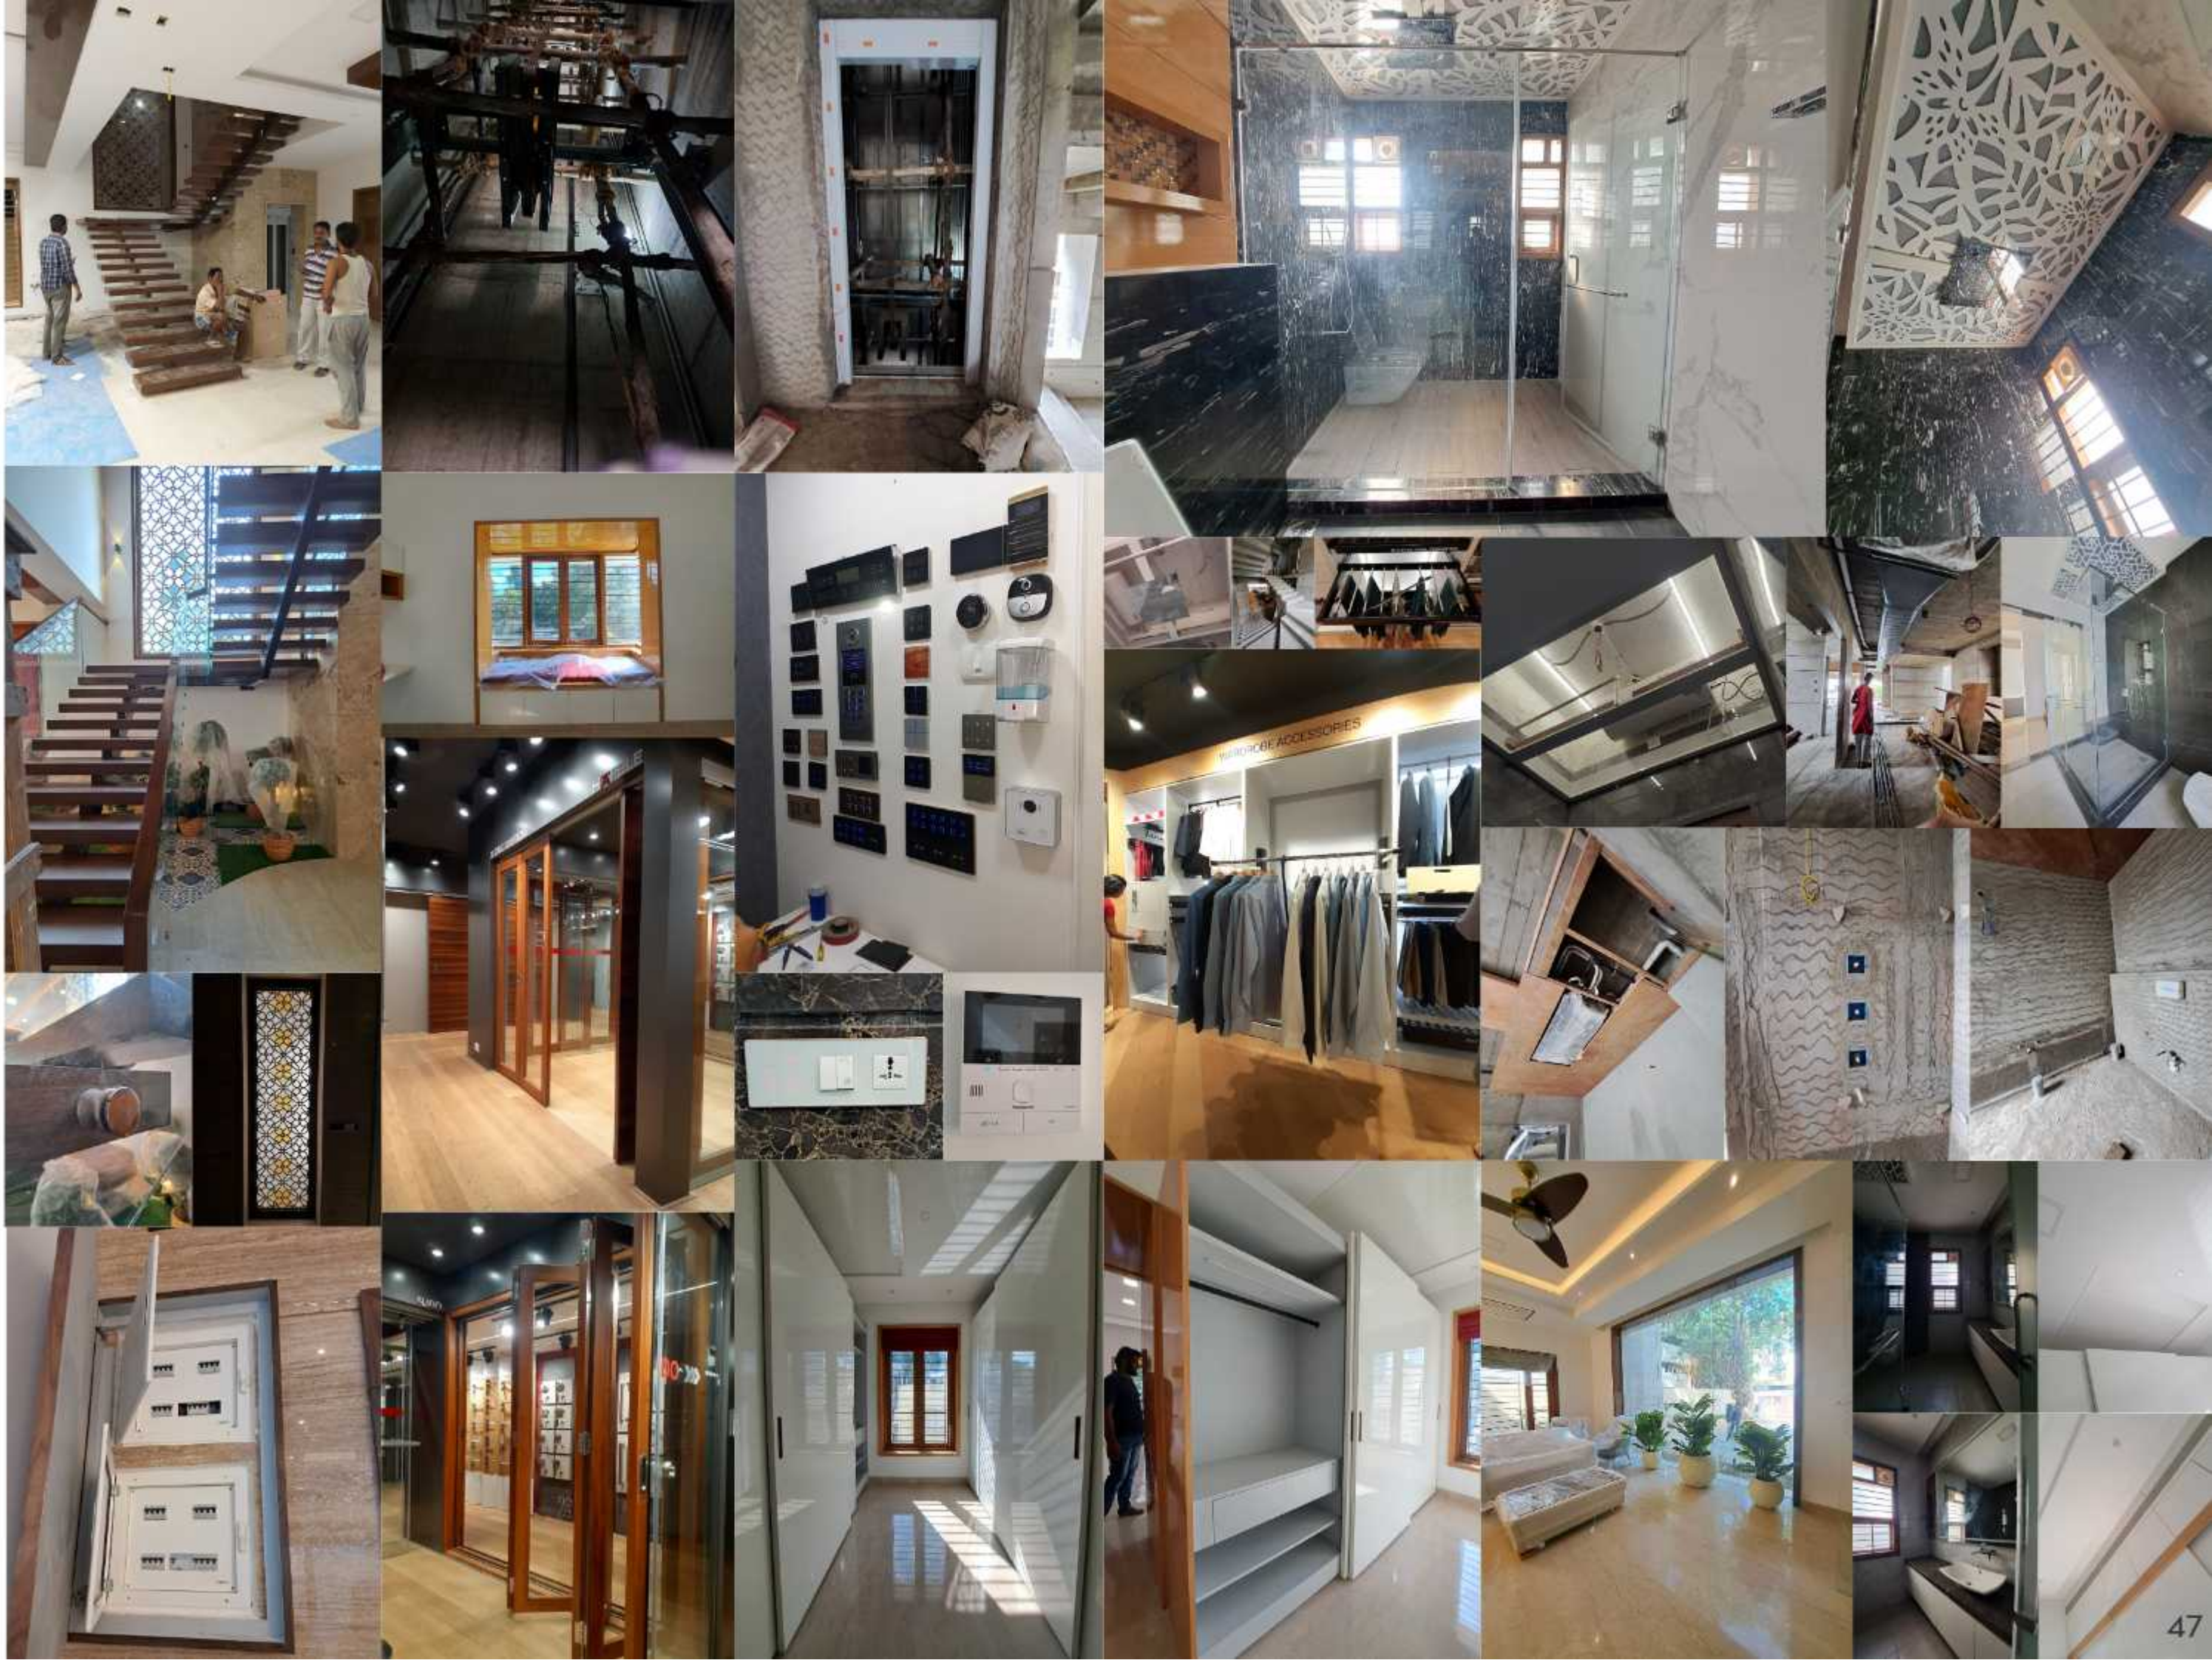

T
H
A
N
K
I
N
G Y O U.....

KIRUBA SHANKARI M

3
9
2
1
O
O
4
1