



# **SATHYABAMA**

**INSTITUTE OF SCIENCE AND TECHNOLOGY  
(DEEMED TO BE UNIVERSITY)**

**Accredited "A" Grade by NAAC | 12B Status by UGC | Approved by AICTE**

**[www.sathyabama.ac.in](http://www.sathyabama.ac.in)**

**SCHOOL OF BUILDING AND ENVIRONMENT  
DEPARTMENT OF ARCHITECTURE  
M. Arch (Building management)**

**PROFESSIONAL TRAINING (S84APT)  
DEC 2021 - JAN 2022**

Name of the Student : M. Arun pandian

Semester : III

Reg No. : 40840003

Batch : 2020-2022



# SATHYABAMA

INSTITUTE OF SCIENCE AND TECHNOLOGY

(DEEMED TO BE UNIVERSITY)

Accredited "A" Grade by NAAC | 12B Status by UGC | Approved by AICTE

[www.sathyabama.ac.in](http://www.sathyabama.ac.in)

SCHOOL OF BUILDING AND ENVIRONMENT

DEPARTMENT OF ARCHITECTURE

M. Arch (Building management)

## VIVA-VOCE EXAMINATION

This is to certify that the Professional Training Report (S84APT) is the work of **M. ARUN PANDIAN** who had undergone training in **SHAPOORJI PALLONJI PVT, LTD.** and has been monitored by the continuous assessment during Dec 2021 to Jan 2022.

**Dr. Devyani Gangopadhyay**  
**HOD AND DEAN**

Submitted for Viva voce Examination held on 01.02.2022.

**Internal Examiner**  
**(Ar. SUKIRTHA SURESH)**

**External Examiner**  
**(Ar. HENA DAMODHARAN)**



# SATHYABAMA

INSTITUTE OF SCIENCE AND TECHNOLOGY

(DEEMED TO BE UNIVERSITY)

Accredited "A" Grade by NAAC | 12B Status by UGC | Approved by AICTE

[www.sathyabama.ac.in](http://www.sathyabama.ac.in)

## DECLARATION

I **M. ARUN PANDIAN** hereby declare that this Professional Training Report for **30 days (from 01<sup>st</sup> Dec 2021 to 6<sup>th</sup> Jan 2022)** done by me under the guidance of **Mr.K. BALU** is submitted in partial fulfillment of the requirements for the completion of practical training session.

DATE : 1<sup>st</sup>, February, 2022.

PLACE : CHENNAI

SIGNATURE OF CANDIDATE

# ACKNOWLEDGEMENT

I am pleased to acknowledge my sincere thanks to Board of Management of **SATHYABAMA INSTITUTE OF SCIENCE & TECHNOLOGY** for their kind encouragement in doing this project and for completing it successfully. I am grateful to them.

I convey my thanks to **Dr. Devyani Gangopadhyay Dean, School of building and Environment** for providing me necessary support and details at the right time during the progressive reviews.


I would like to express my sincere and deep sense of gratitude to project manager **Mr.K. BALU** for his valuable guidance, suggestions and constant encouragement paved way for the successful completion of my Training.

I would also like to express my sincere thanks to Ar. Sukirtha Suresh (Internal Co-Ordinator) for her valuable guidance, during the entire Professional Training period.


I wish to express my thanks to all Teaching and Non-teaching staff members of the Department of Architecture who were helpful in many ways for the completion of the project.

Also thank Project director Mr. Sethubathy for his valuable guidance, during the entire Professional Training period.

# CONFIRMATION LETTER

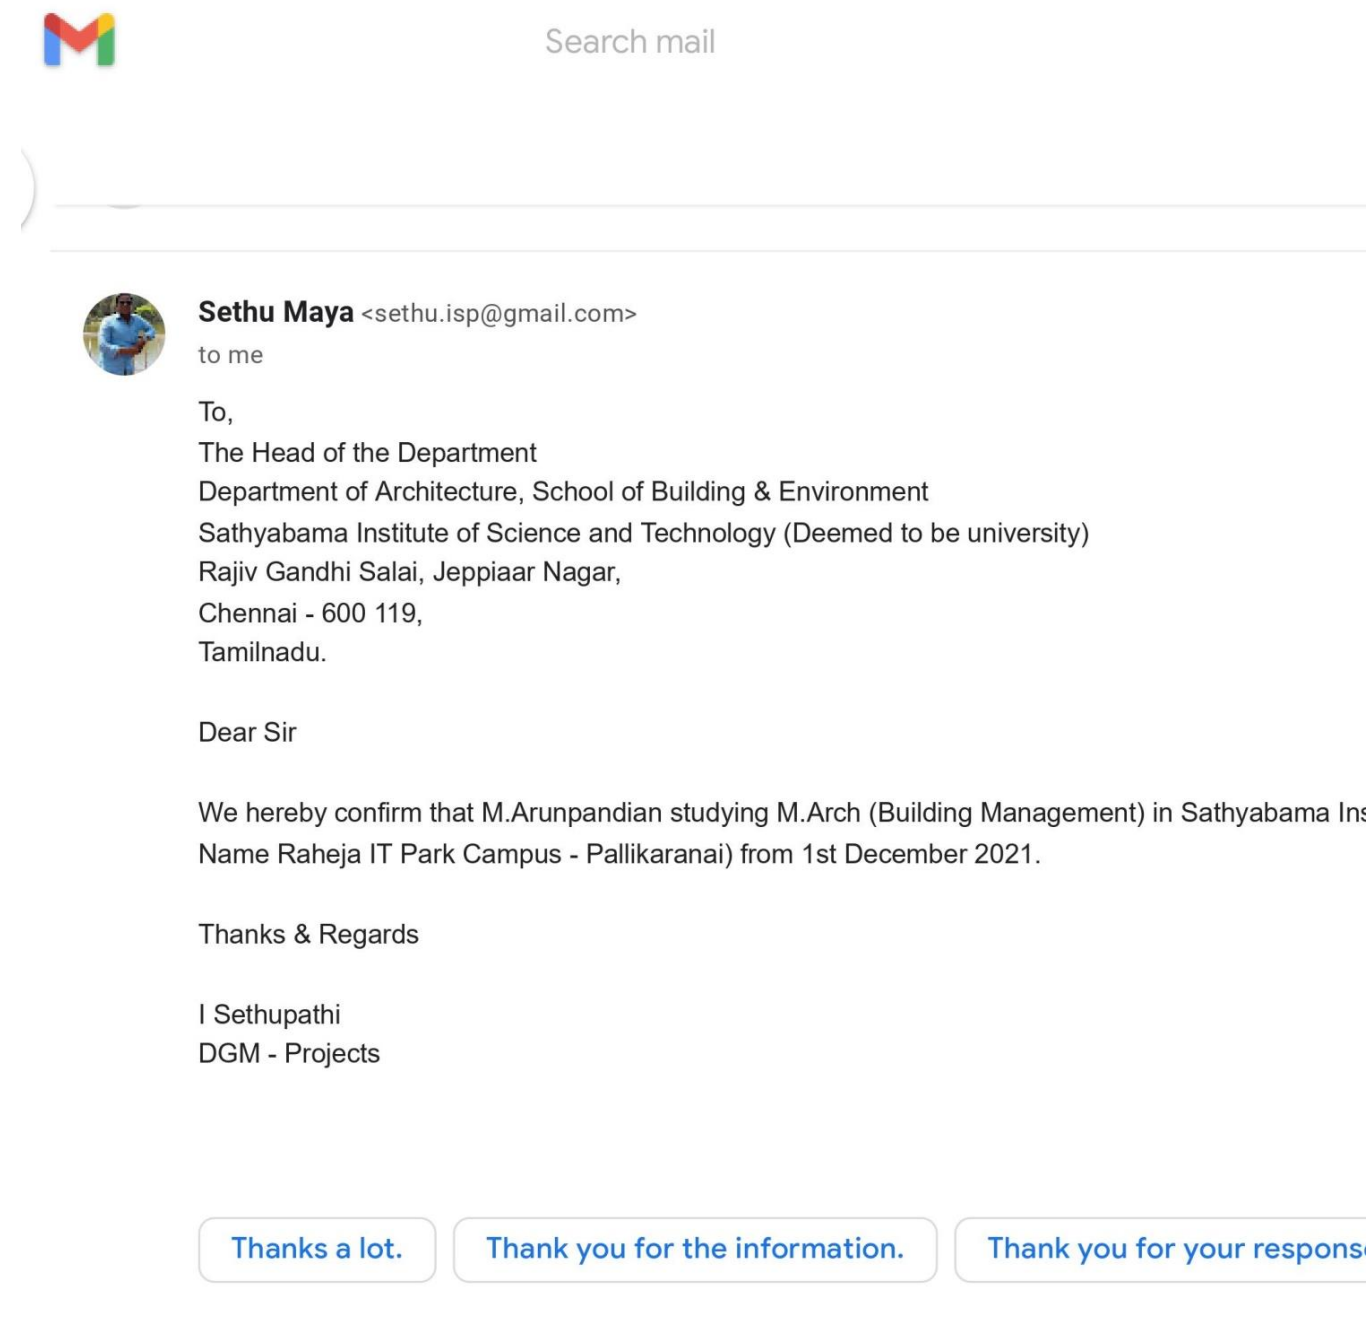

# CONSOLIDATED CERTIFICATE

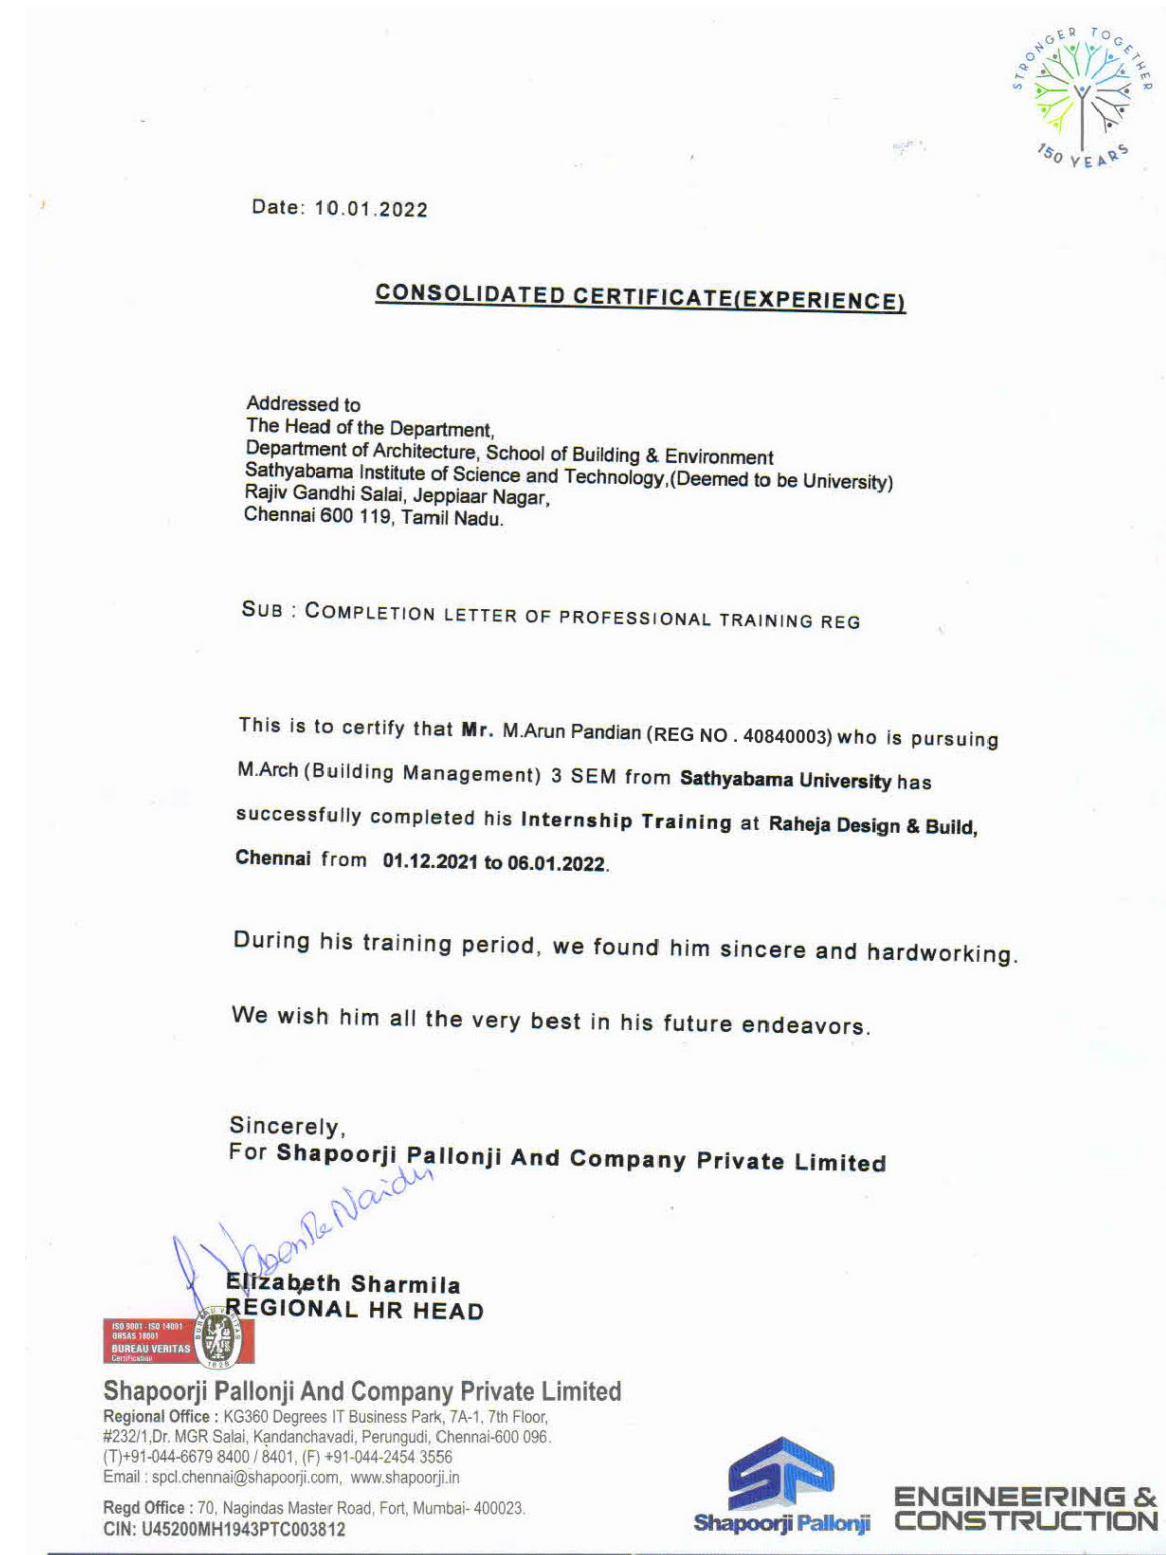

# MONTHLY REPORT



Accredited "A" Grade by NAAC | 12B Status by UGC | Approved by AICTE  
www.sathyabama.ac.in

**SCHOOL OF BUILDING & ENVIRONMENT, DEPARTMENT OF ARCHITECTURE**  
M. Arch (Building management) Batch 2020-2022  
**Continuous Assessment Report for Professional training**

(Continuous progress report of the trainee architect/Project Manager for the period of 15 working days in the office to be submitted to HOD)

|                                                   |                                                   |
|---------------------------------------------------|---------------------------------------------------|
| 1. Name of the office / organization :            | SHAPOORTI PALLONJI Co. Pvt. Ltd                   |
| 2. Address & Contact Number                       | : K9360 IT Park, Perungudi, Chennai. 044-24513556 |
| 3. Name of the student                            | : M. ARUN PANDIAN                                 |
| 4. Duration                                       | : From 01/12/2021 To 17/12/2021                   |
| 5. Total No. of days                              | : 15 days                                         |
| 6. Evaluation of Performance criteria shall be on |                                                   |

\* Note: Kindly grade the student as per his/her overall performance in the office during the assessment month;

| Description of works                       | Excellent | Good | Fair | Poor | NA |
|--------------------------------------------|-----------|------|------|------|----|
| Understanding of office culture            |           | ✓    |      |      |    |
| Skillsets related to project management    |           | ✓    |      |      |    |
| Design Management                          |           | ✓    |      |      |    |
| Understanding the Triple Constraints       |           | ✓    |      |      |    |
| Observation during Site Visits             |           | ✓    |      |      |    |
| Understanding of construction details      |           | ✓    |      |      |    |
| Understanding of Construction sequences    |           | ✓    |      |      |    |
| Site Supervision / Discussion with clients |           | ✓    |      |      |    |
| Adherence to Time schedule                 |           | ✓    |      |      |    |
| Quantitative aptitude                      |           | ✓    |      |      |    |
| Documentation skills                       |           | ✓    |      |      |    |
| Coordination with other consultants        |           | ✓    |      |      |    |

|                  |   |
|------------------|---|
| Overall Grading* | A |
|------------------|---|

(A – 8.0, B – 7.0, C – 6.0, D – 5.5, E – 5.0, F – <5)

7. Any other Remarks : \_\_\_\_\_

8. Signature of the Head of the Office / Organization (With Seal)

*(Signature)*  
CK. BALU



**SATHYABAMA**  
INSTITUTE OF SCIENCE AND TECHNOLOGY  
(DEEMED TO BE UNIVERSITY)

Accredited "A" Grade by NAAC | 12B Status by UGC | Approved by AICTE  
www.sathyabama.ac.in

**SCHOOL OF BUILDING & ENVIRONMENT, DEPARTMENT OF ARCHITECTURE**  
M. Arch (Building management) Batch 2020-2022  
**Continuous Assessment Report for Professional training**

(Continuous progress report of the trainee architect/Project Manager for the period of 15 working days in the office to be submitted to HOD)

|                                                   |                                                   |
|---------------------------------------------------|---------------------------------------------------|
| 1. Name of the office / organization :            | SHAPOORTI PALLONJI Co. Pvt. Ltd                   |
| 2. Address & Contact Number                       | : K9360 IT Park, Perungudi, Chennai. 044-24513556 |
| 3. Name of the student                            | : M. ARUN PANDIAN                                 |
| 4. Duration                                       | : From 18/12/2021 To 06/01/2022                   |
| 5. Total No. of days                              | : 15 days                                         |
| 6. Evaluation of Performance criteria shall be on |                                                   |

\* Note: Kindly grade the student as per his/her overall performance in the office during the assessment month;

| Description of works                       | Excellent | Good | Fair | Poor | NA |
|--------------------------------------------|-----------|------|------|------|----|
| Understanding of office culture            |           | ✓    |      |      |    |
| Skillsets related to project management    |           | ✓    |      |      |    |
| Design Management                          |           | ✓    |      |      |    |
| Understanding the Triple Constraints       |           | ✓    |      |      |    |
| Observation during Site Visits             |           | ✓    |      |      |    |
| Understanding of construction details      |           | ✓    |      |      |    |
| Understanding of Construction sequences    |           | ✓    |      |      |    |
| Site Supervision / Discussion with clients |           | ✓    |      |      |    |
| Adherence to Time schedule                 |           | ✓    |      |      |    |
| Quantitative aptitude                      |           | ✓    |      |      |    |
| Documentation skills                       |           | ✓    |      |      |    |
| Coordination with other consultants        |           | ✓    |      |      |    |

|                  |   |
|------------------|---|
| Overall Grading* | A |
|------------------|---|

(A – 8.0, B – 7.0, C – 6.0, D – 5.5, E – 5.0, F – <5)

7. Any other Remarks : \_\_\_\_\_

8. Signature of the Head of the Office / Organization (With Seal)

*(Signature)*  
CK. BALU

## WORK DIARY

| DAY | PROJECT NAME       | WORK DONE            | DAY | PROJECT NAME       | WORK DONE             |
|-----|--------------------|----------------------|-----|--------------------|-----------------------|
| 01  | Rakheja I.T. park. | Site work            | 16  | Rakheja I.T. park. | Quantity Calculation  |
| 02  | Rakheja I.T. park  | Site work            | 17  | Rakheja I.T. park  | Quantity Calculation  |
| 03  | Rakheja I.T. Park  | Site work            | 18  | Rakheja I.T. Park. | Quantity Calculation  |
| 04  | Rakheja I.T. Park  | Site work            | 19  | Rakheja I.T. Park  | Quantity Calculation  |
| 05  | Rakheja I.T. Park  | Site work            | 20  | Rakheja I.T. Park  | Documenting man power |
| 06  | Rakheja I.T. Park. | Site work            | 21  | Rakheja I.T. Park  | Documenting man power |
| 07  | Rakheja I.T. Park. | Site work            | 22  | Rakheja I.T. Park. | Documenting man power |
| 08  | Rakheja I.T. Park. | Site work            | 23  | Rakheja I.T. Park. | Documenting man power |
| 09  | Rakheja I.T. Park. | Site work            | 24  | Rakheja I.T. Park. | Site work.            |
| 10  | Rakheja I.T. Park. | Site work.           | 25  | Rakheja I.T. Park  | Site work             |
| 11  | Rakheja I.T. Park  | Scheduling           | 26  | Rakheja I.T. Park. | Site work             |
| 12  | Rakheja I.T. Park  | Scheduling           | 27  | Rakheja I.T. Park. | Site work             |
| 13  | Rakheja I.T. Park. | Scheduling           | 28  | Rakheja I.T. Park. | Site work             |
| 14  | Rakheja I.T. Park  | Quantity calculation | 29  | Rakheja I.T. Park  | Site work             |
| 15  | Rakheja I.T. Park. | Quantity Calculation | 30  | Rakheja I.T. Park. | Site work.            |

Chief Architect Signature:

Office seal:

*(Handwritten signature: P. Zah)*  
*(Handwritten initials: CK 3400)*  


## TABLE OF CONTENTS

| CHAPTER NO | TITLE                   | PAGE NO |
|------------|-------------------------|---------|
| 1.         | GENERAL                 | 9       |
| 2.         | HISTORY OF THE FIRM     | 10      |
| 3.         | PROJECT DETAILS         | 11      |
| 4.         | LOGISTIC SITE PLAN      | 13      |
| 5.         | BLOCK 2 PLAN            | 14      |
| 6.         | BLOCK 2 STRUCTURAL PLAN | 15      |
| 7.         | MASTER SHEDULE          | 16      |
| 8.         | DETAIL SHEDULE          | 17      |

## 01.GENERAL



Shapoorji Pallonji & Company Private Limited trading as Shapoorji Pallonji Group is an Indian conglomerate company, headquartered in Mumbai, India. It operates in construction, real estate, textiles, engineered goods, home appliances, shipping, publications, power, and biotechnology. The company was headed by a grandson of founder Pallonji Mistry, also named Pallonji Mistry, until 2012, when he announced his retirement and the succession of his son, Shapoor Mistry.

Shapoorji Pallonji is regarded as "*one of India's most valuable private enterprises*." The US\$2.5 billion Shapoorji Pallonji Group have two listed companies, Forbes & Company Ltd. and Gokak Textiles. Forbes was already listed when bought by Shapoorji Pallonji, though there was speculation in 2006 that group company Afcons Infrastructure would go public via an IPO.

The company is known for building some of Mumbai's landmarks around the Fort area, including the Hong Kong Bank, Grindlays Bank, Standard Chartered Bank and Reserve Bank of India building, Bombay Stock Exchange building and Taj Intercontinental. Apart from these, the company has built a stone palace for the Sultan of Oman in 1971. After the 2008 Mumbai Attacks, the company was involved in the repairs and renovation of Taj Mahal Palace & Tower which was severely damaged by the attack. Other notable projects include The Imperial in Mumbai, Jumeirah Lake Towers in Dubai and Ebene Cyber City in Mauritius.

In 2012, Shapoor Mistry announced that the Group had plans to invest in a deep-sea port, an IT park, hydro electricity and construction of roads and night shelters for the poor in West Bengal. In January 2016, Shapoorji Pallonji Group launched its first affordable housing brand, Joyville Homes.

## 02.HISTORY OF THE COMPANY



The company was founded as a partnership firm Littlewood Pallonji, in 1865. The first project was the construction of a pavement on the Girgaum Chowpatty, followed by being part of the construction of a reservoir on Malabar Hill which supplied water to Mumbai for over 100 years. The company also built the Brabourne stadium in Mumbai and the Jawaharlal Nehru stadium in Delhi. The Mumbai Central Railway station, was also built by them at a cost of ₹1.6 crore. The company was commended by the then Governor of Bombay for completing the work within 21 months. In recent years, it has built the Barakhamba Underground Station in Delhi and Providence Stadium in Guyana. In 2010, it built India's tallest building, The Imperial, a residential tower in Mumbai.

The Shapoorji Pallonji has also had a brief involvement with Bollywood. Released in 1960, K. Asif's magnum opus, and one of the most popular and critically acclaimed Bollywood film of all time, Mughal-e-Azam, was funded by the group with a budget of ₹ 1.5 crore, which made it the most expensive Bollywood film till then and a record it held for many years. More than four decades later, the group funded a digital remastering of the film at a budget of ₹5 crore, which was released on 12 November 2004. Shapoor Mistry, grandson of Shapoorji Pallonji Mistry, thought it a fitting tribute to complete his grandfather's unfinished dream of colourising the film, especially as the original was produced by his grandfather. In 2016, Shapoorji Pallonji Group, in association with the National Centre for the Performing Arts (India), co-produced Mughal-e-Azam, a Broadway-style musical directed by Feroz Abbas Khan, and based on the 1960 Bollywood film Mughal-e-Azam

### 03.PROJECT DETAILS



LOCATION: Raheja IT park campus, Opp. kamachi Memorial Hospital , Pallikaranai , Chennai.


TOTAL NUMBER OF BLOCKS: 3 each block is split into 3 to 4 zones as per design.

BUILDING TYPE: IT park.




| SITE NAME : Proposed MSB IT/ITES Building at Pallikaranai, Chennai. |                                 |                                                     |                                                                                                                                           |
|---------------------------------------------------------------------|---------------------------------|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| NO.                                                                 | DESIGNATION                     | COMPANY NAME                                        | ADDRESS                                                                                                                                   |
| 1                                                                   | CLIENT                          | Sycamore Properties Pvt. Ltd                        | Door No : 2, Pallavaram Thoraipakkam<br>200 Feet Radial Road (MMRD),<br>Pallikaranai,<br>Chennai - 600100.                                |
| 2                                                                   | ARCHITECTS                      | NATARAJ & VENKAT<br>ARCHITECTS                      | 18, 3rd SEAWARD RD, VALMIKI NAGAR<br>THIRUVANMIYUR, CHENNAI 600041<br>T/ + 91 44 2457 2457                                                |
| 3                                                                   | PMC                             | CBRE SOUTH ASIA PVT. LTD.                           | SP Infocity, No 40, MGR Salai<br>Module 4A, A Block – 10th Floor<br>Kandanchavadi, Perungudi<br>Chennai, Tamil Nadu 600096                |
| 4                                                                   | STR                             | DesignTree Service Consultants<br>Pvt. Ltd          | # 7 Laxmi Narasimha Complex,<br>15th Cross 100 Feet Road, 4th Phase J.P. Nagar,<br>Bangalore - 560078 INDIA<br>T : +91 8041225481         |
| 5                                                                   | STR                             | SOMADEV NAGESH<br>STRUCTURAL<br>Consulting Engineer | New no. 15, 3rd cross street,<br>Karpagam Gardens, Adayar,<br>Chennai - 600 020,<br>Tamilnadu, India.                                     |
| 6                                                                   | MEP                             | Sunil Nayyar Consulting<br>Engineers LLP            | Head Office : 206- 206A & 305A-305B, 2nd & 3rd Floor,<br>Time Centre, DLF Golf Course Road, Sector-54, Gurgaon-<br>122002, Haryana, India |
| 7                                                                   | DESIGN AND<br>BUILD<br>DIVISION | SHAPOORJI PALLONJI & CO.<br>PVT. LTD.               | Contractor Building, 1st Floor,<br>Ramjibhai Kamani Marg, Ballard Estate Mumbai - 400 038.                                                |
|                                                                     |                                 |                                                     |                                                                                                                                           |

# RAHEJA SITE LOGISTIC PLAN

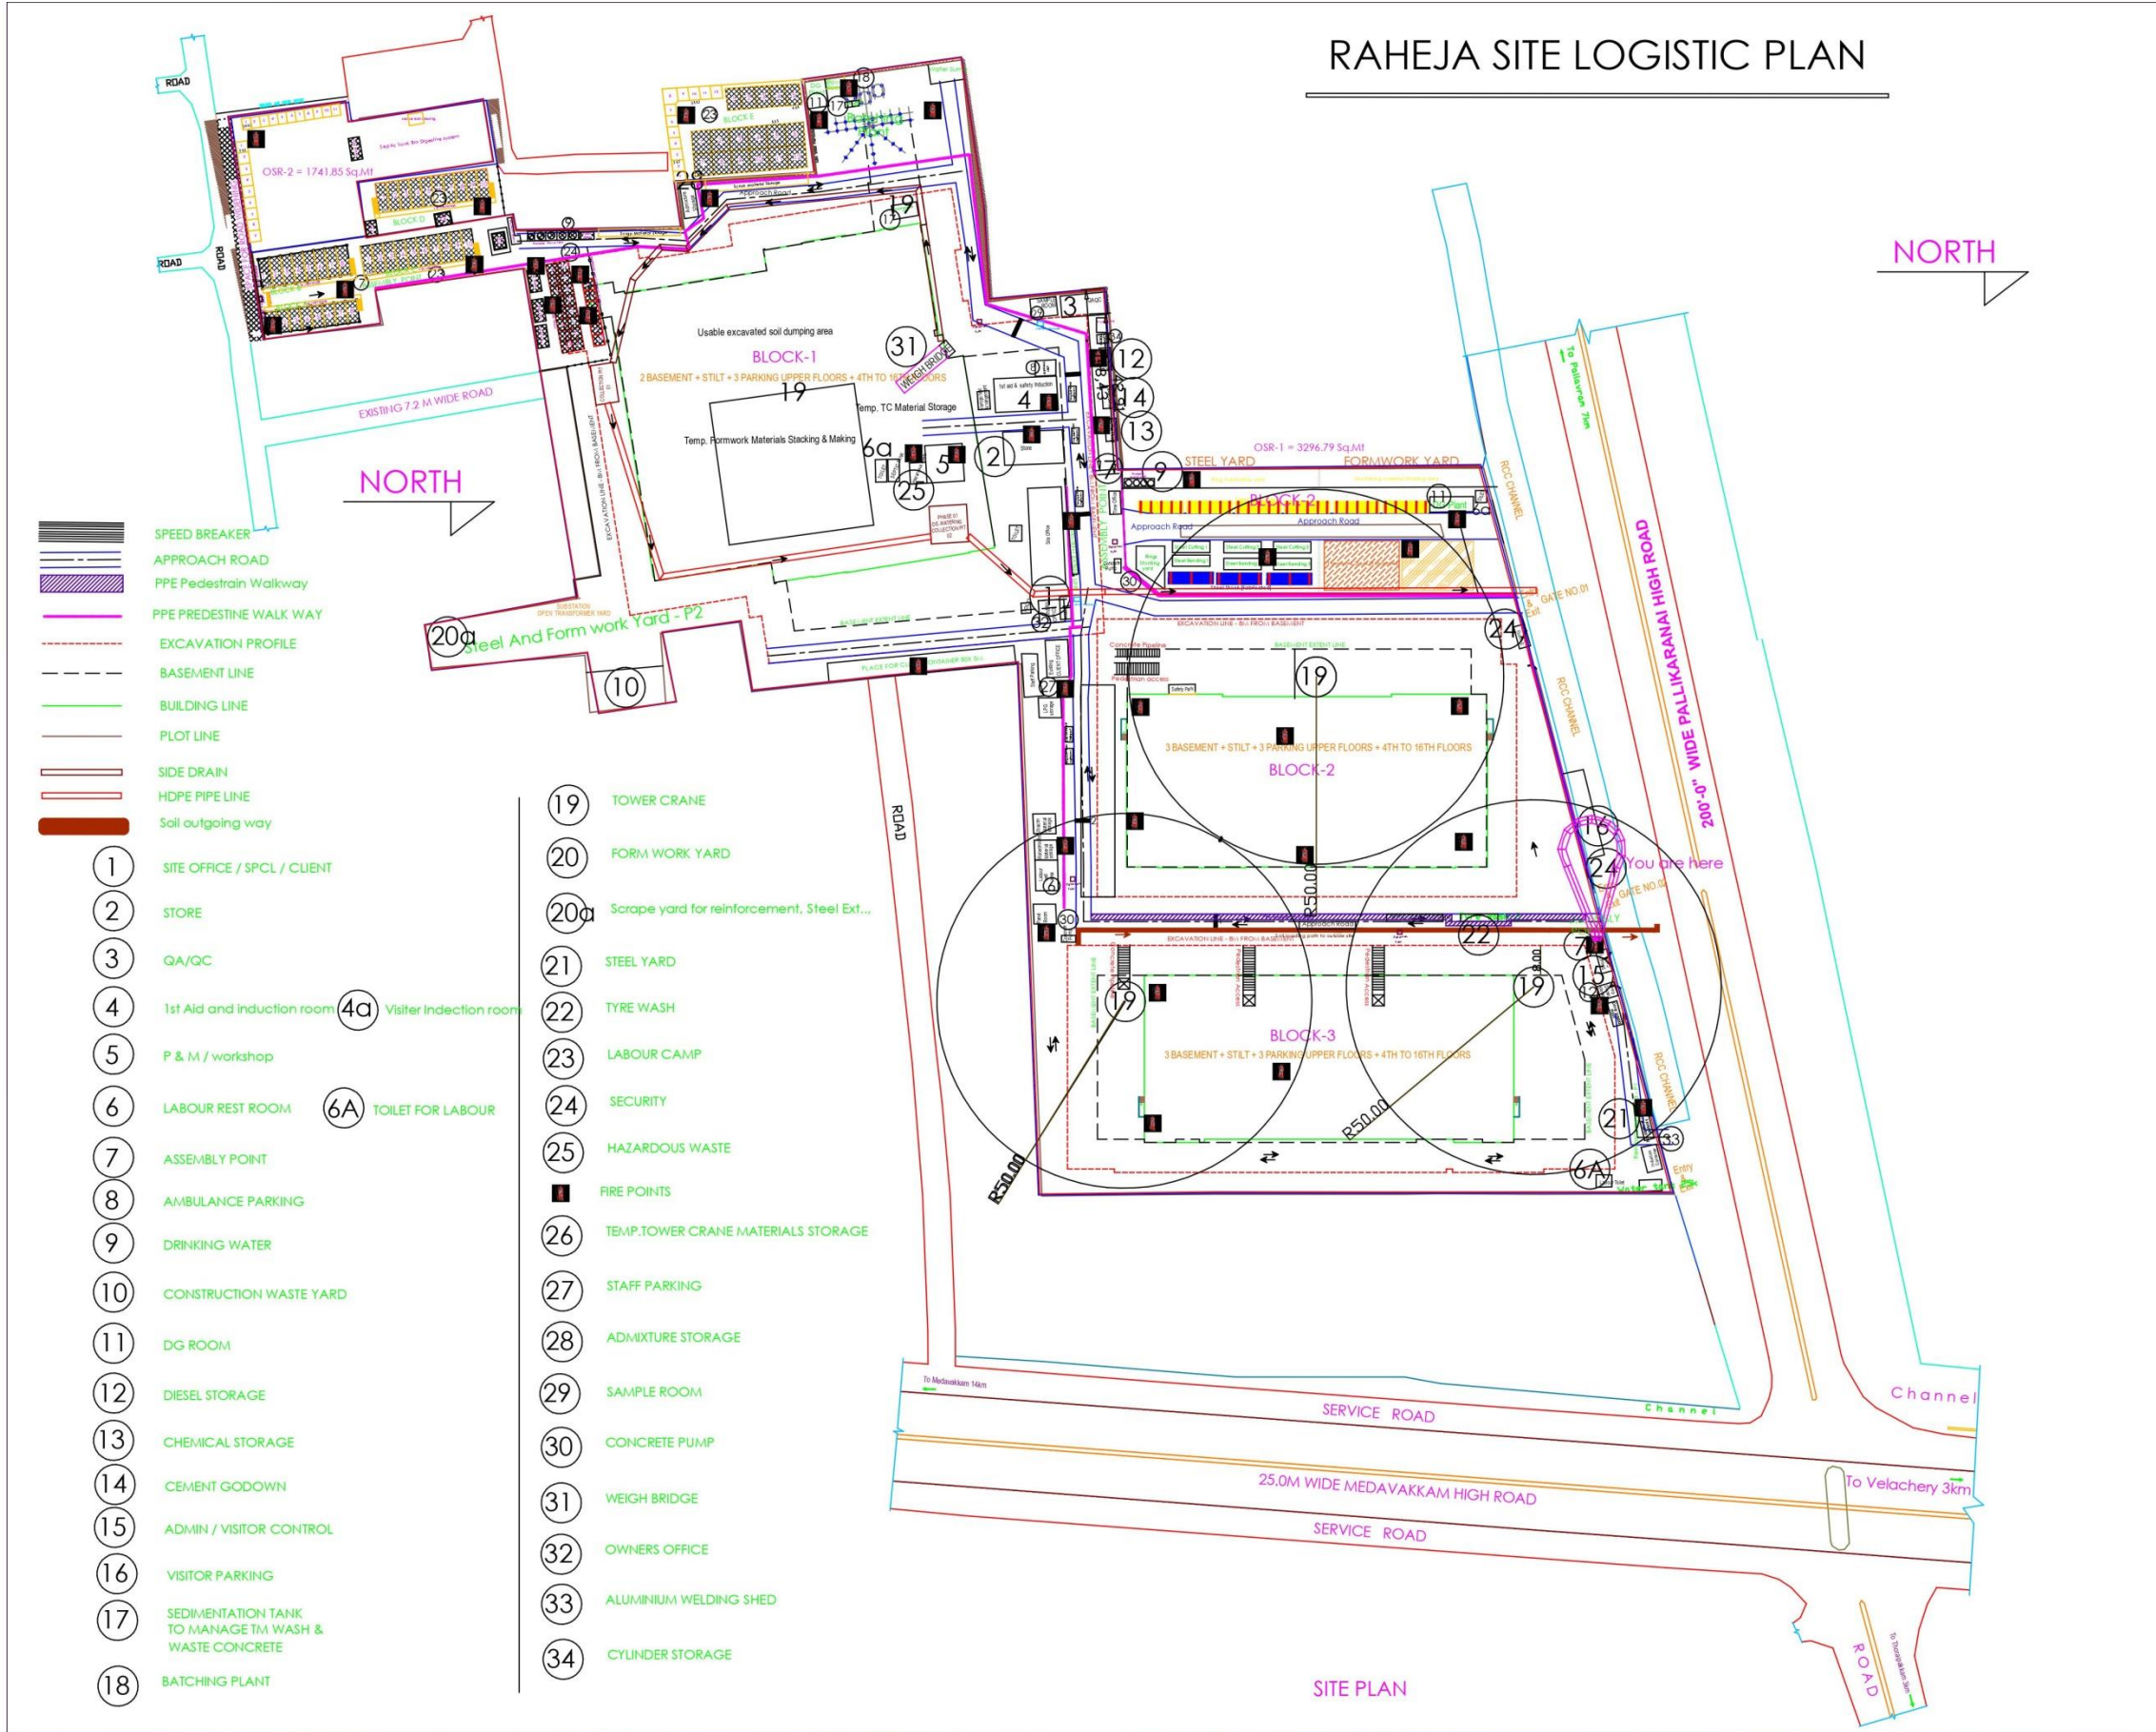





BLOCK 2- 4<sup>TH</sup> FLOOR

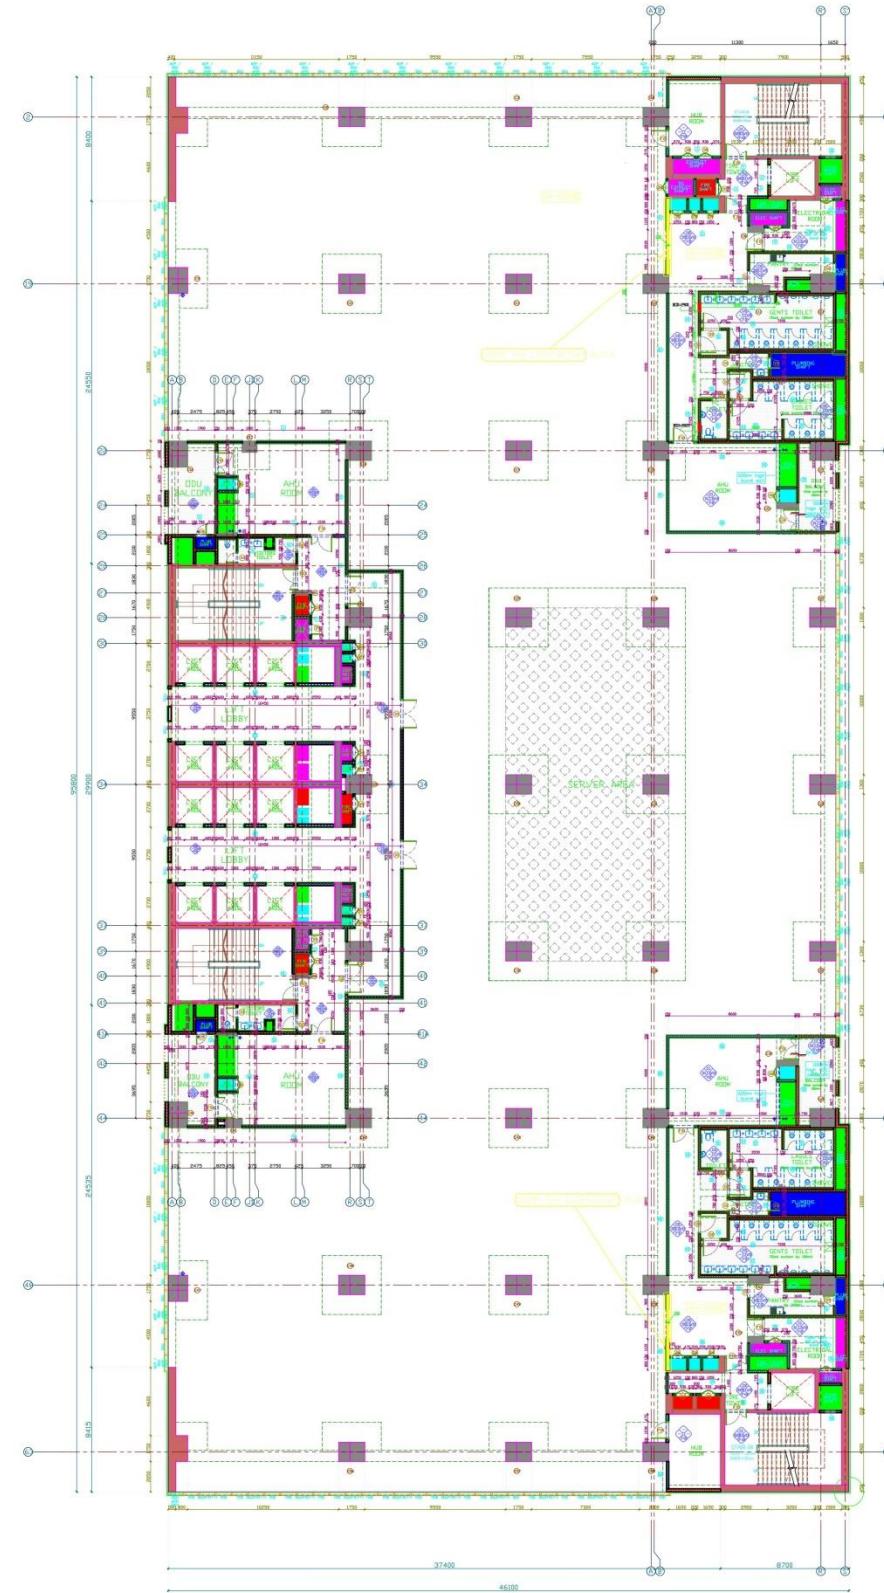

BLOCK 2 - 5<sup>TH</sup> FLOOR

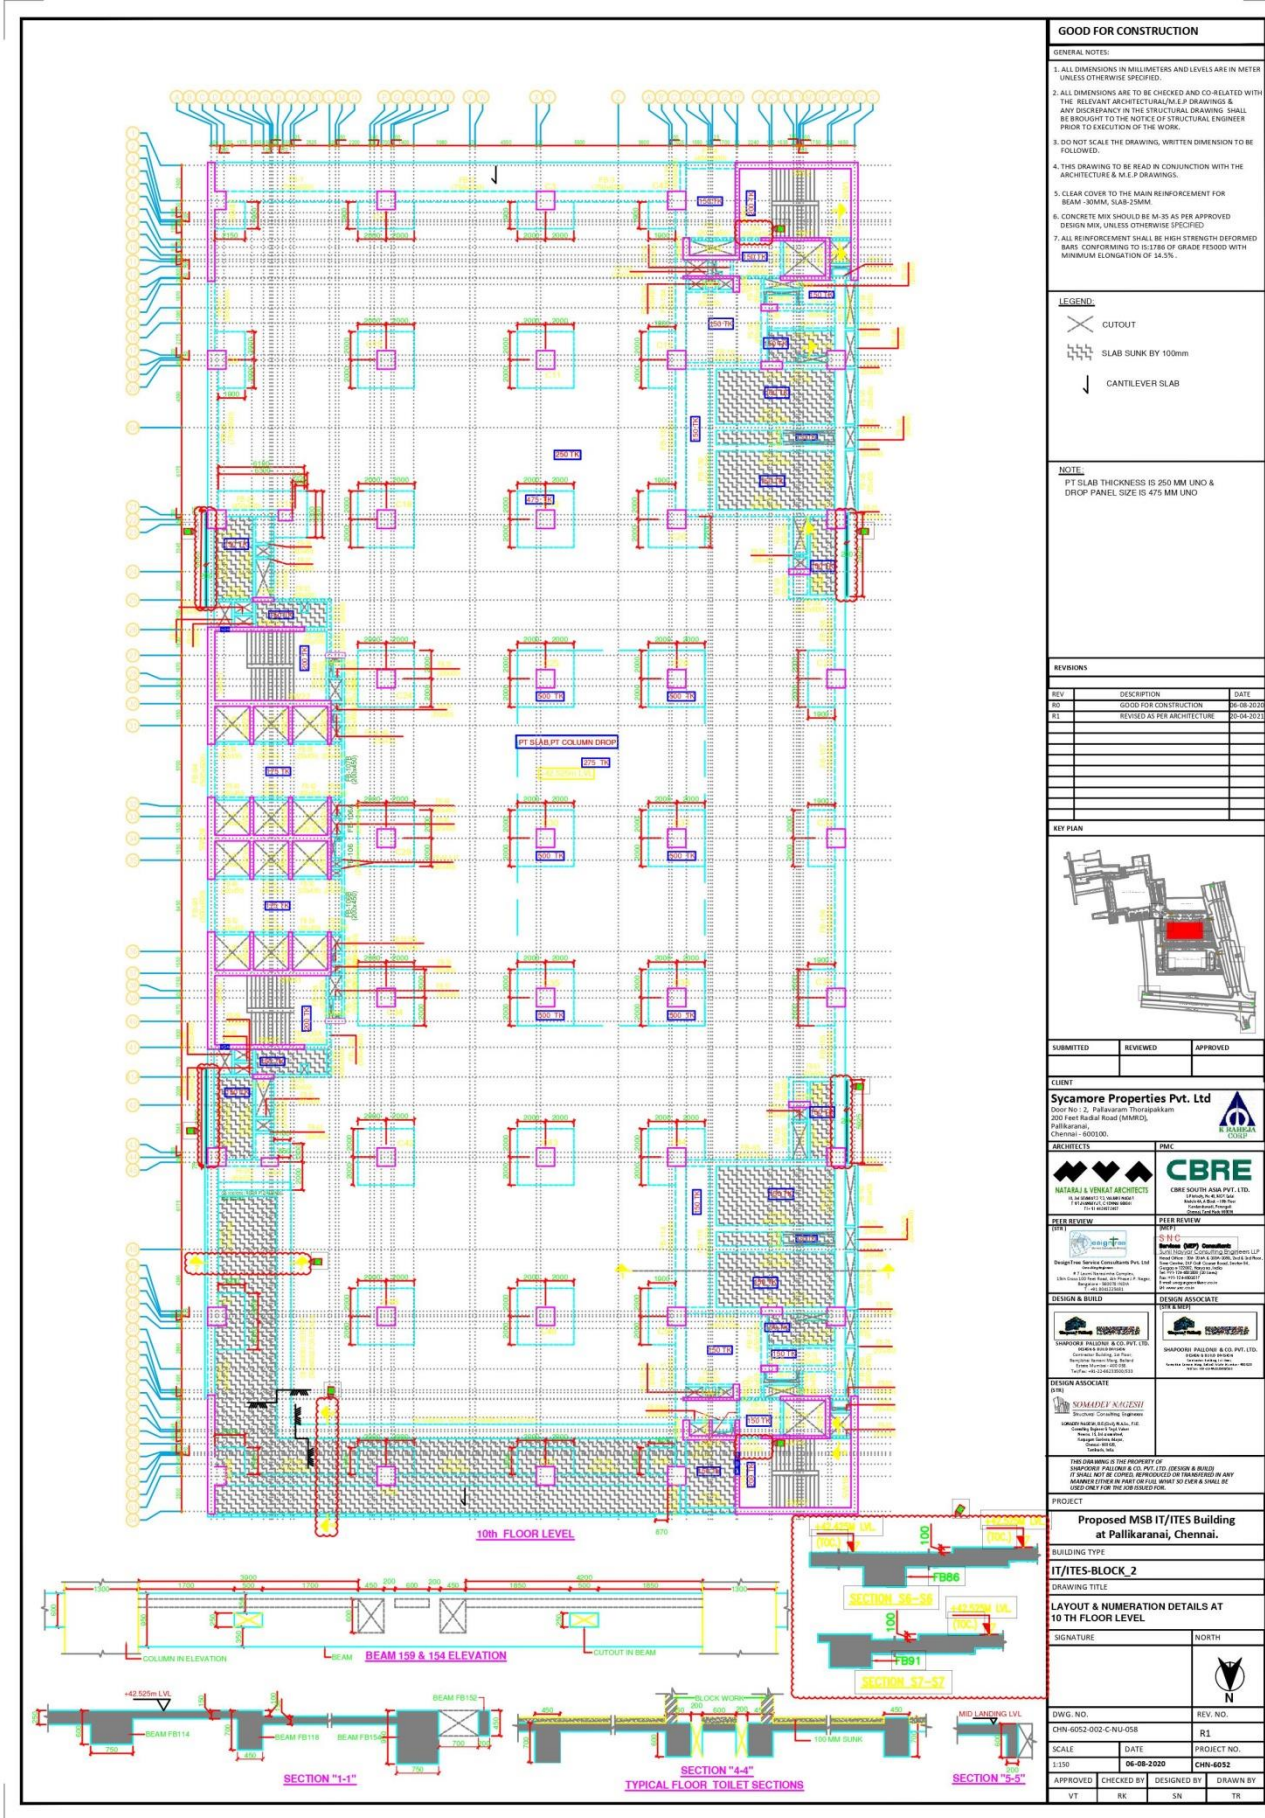

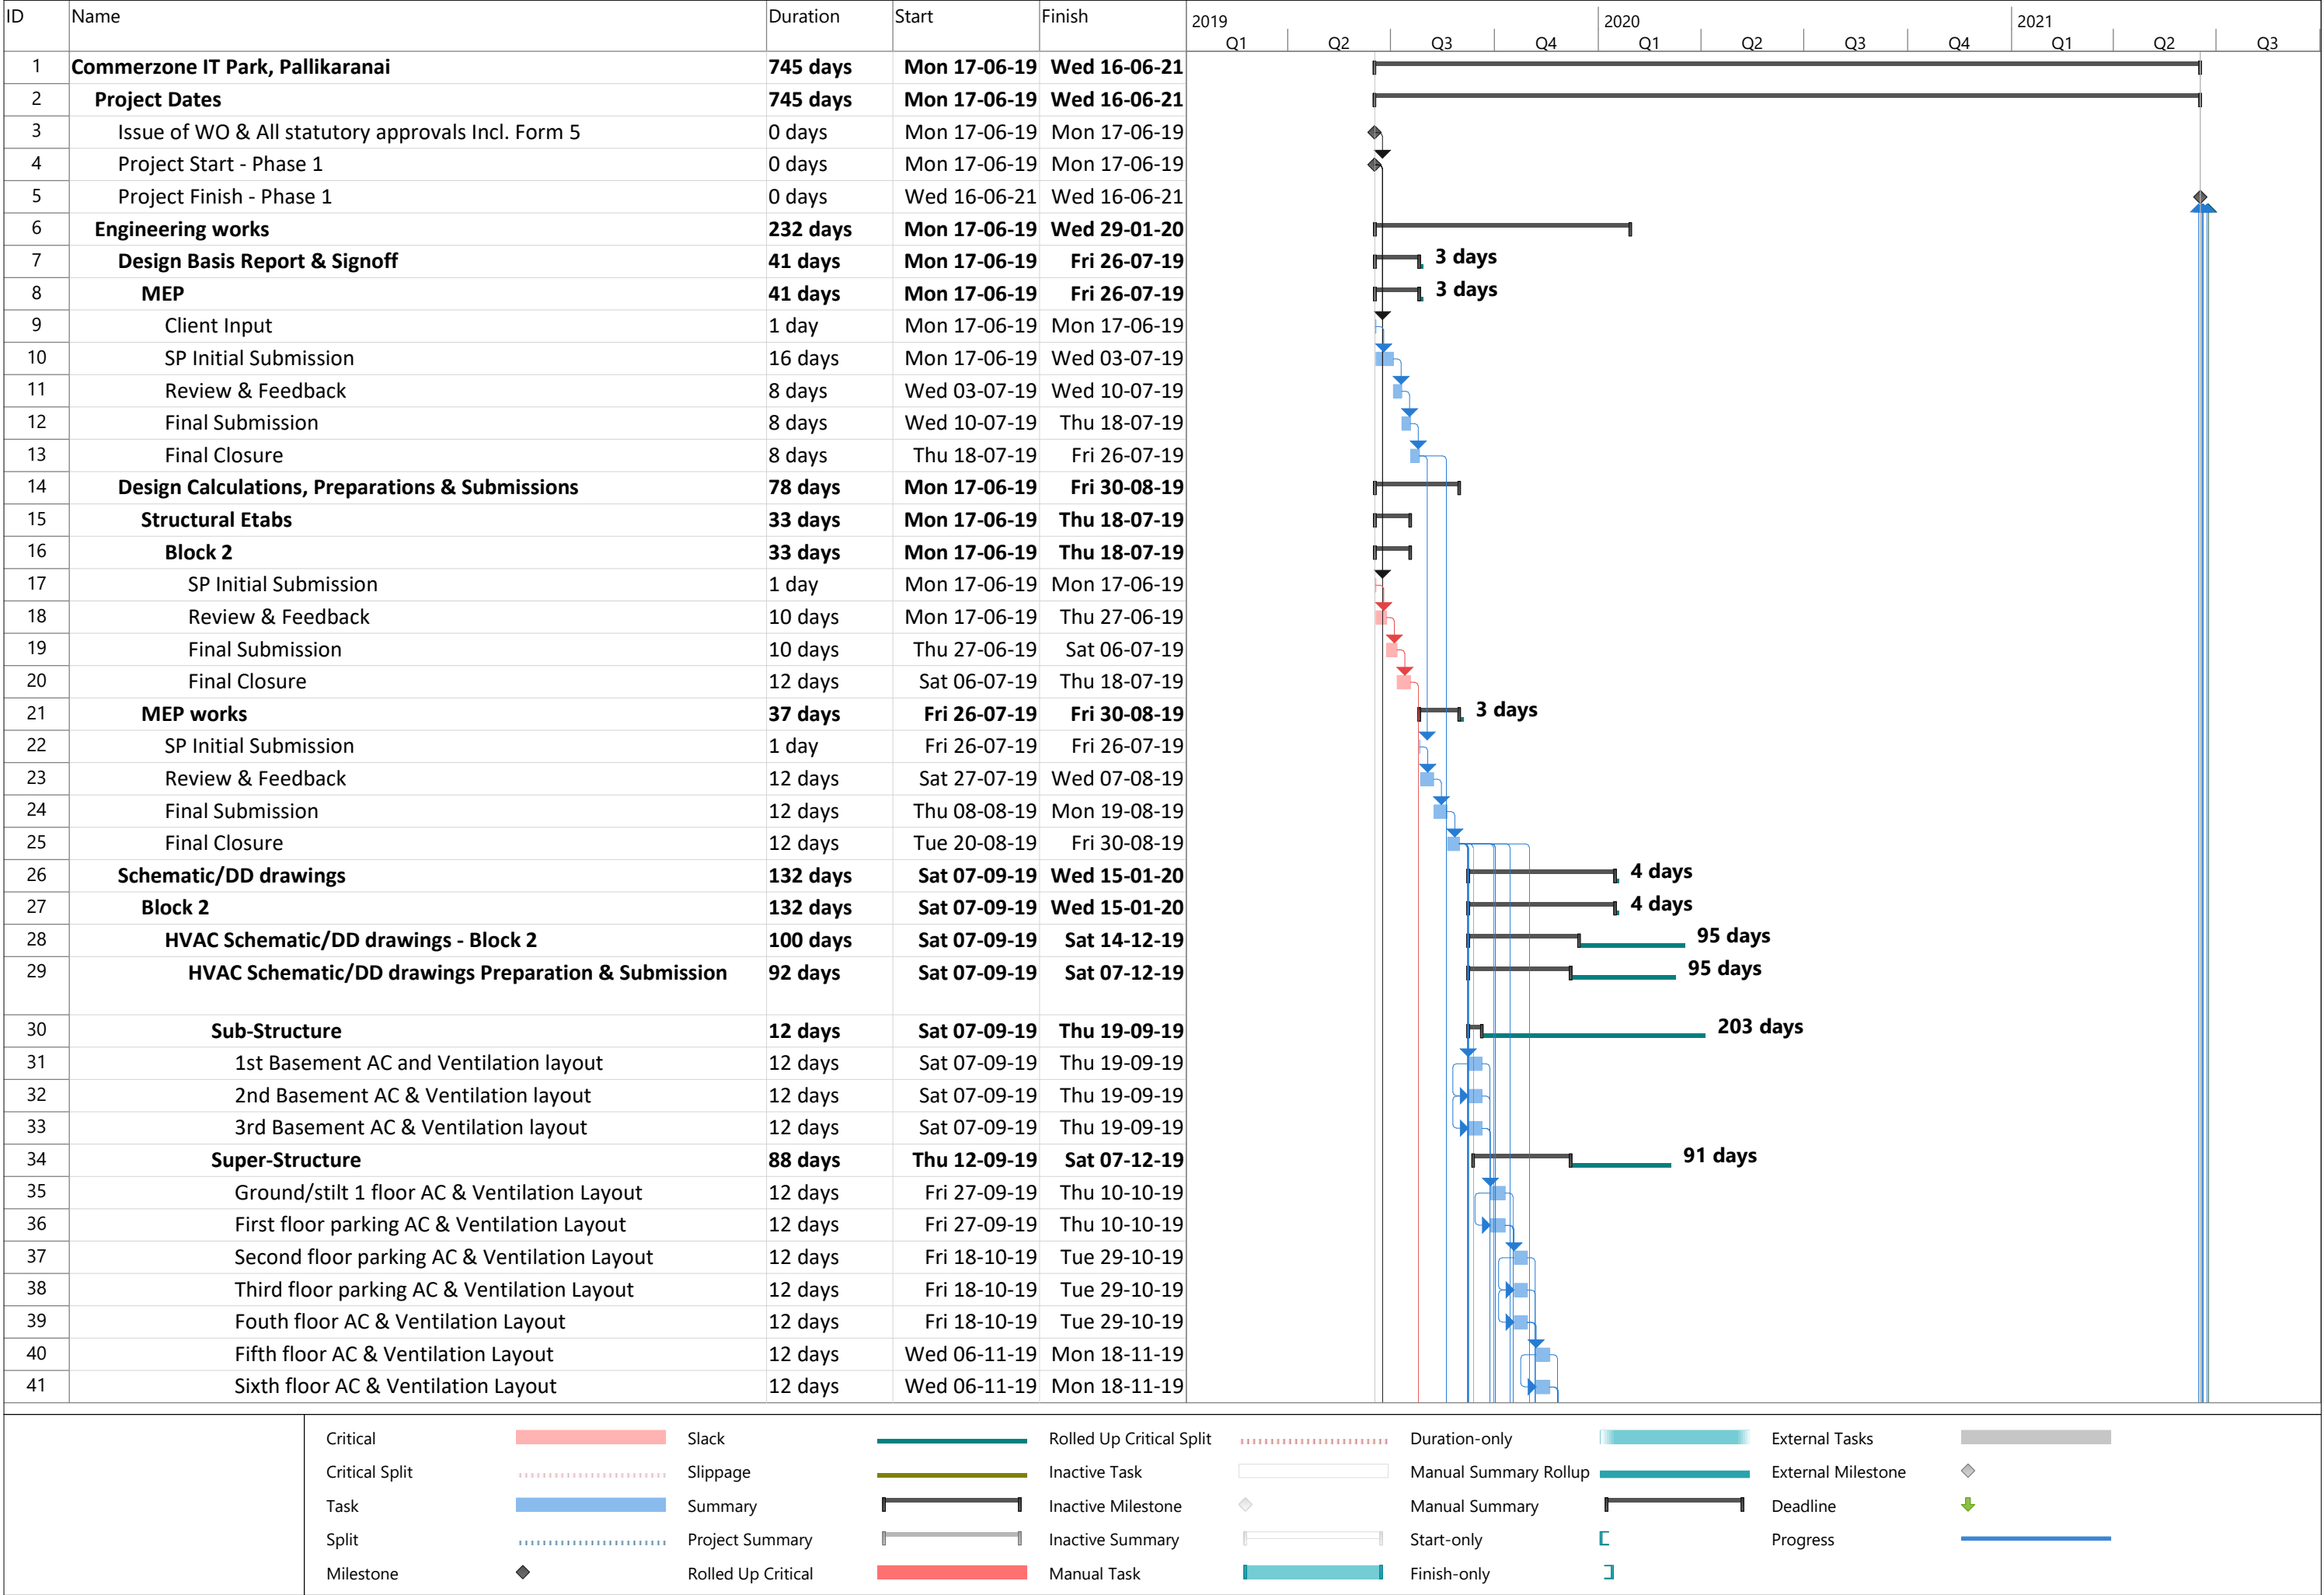

| ID | Name                                                                                    | Duration | Start        | Finish       | 2019 |    |    |    | 2020 |    |    |    | 2021 |    |    |
|----|-----------------------------------------------------------------------------------------|----------|--------------|--------------|------|----|----|----|------|----|----|----|------|----|----|
|    |                                                                                         |          |              |              | Q1   | Q2 | Q3 | Q4 | Q1   | Q2 | Q3 | Q4 | Q1   | Q2 | Q3 |
| 42 | Seventh floor AC & Ventilation Layout                                                   | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |    |    |      |    |    |
| 43 | Typical Floor AC & Ventilation Layout (8th,10th,11th,12th, 14th, 15th & 16th)           | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |    |    |      |    |    |
| 44 | Typical Floor AC & Ventilation Layout (9th & 13th)                                      | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |    |    |      |    |    |
| 45 | Terrace floor AC & Ventilation Layout                                                   | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |    |    |      |    |    |
| 46 | Mumty Floor AC & Ventilation Layout                                                     | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |    |    |      |    |    |
| 47 | Chilled water Schematic Layout                                                          | 12 days  | Thu 12-09-19 | Mon 23-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 48 | Plant room Chilled water Schematic Layout                                               | 12 days  | Thu 12-09-19 | Mon 23-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 49 | Typical Staircase pressurization schematic Layout(4 Nos.)                               | 12 days  | Thu 12-09-19 | Mon 23-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 50 | Typical Liftwell Pressurization Shematic Layout (12 Nos.)                               | 12 days  | Thu 12-09-19 | Mon 23-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 51 | Typical Liftwell Pressurization Shematic Layout (Fire lift - 2 Nos.)                    | 12 days  | Thu 12-09-19 | Mon 23-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 52 | Typical Lift Lobby Pressurization Shematic Layout (B3 to 3rd flr - 2 Nos.)              | 12 days  | Thu 12-09-19 | Mon 23-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 53 | Typical Lift Lobby Pressurization Shematic Layout (4th to 16th flr - 2 Nos.)            | 12 days  | Thu 12-09-19 | Mon 23-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 54 | Typical Lift Lobby Pressurization Shematic Layout (B3 to 16th flr - Fire lift - 2 Nos.) | 12 days  | Thu 12-09-19 | Mon 23-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 55 | HRW schematic layout                                                                    | 12 days  | Thu 12-09-19 | Mon 23-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 56 | Toilet Exhuast Schematic Layout                                                         | 12 days  | Thu 12-09-19 | Mon 23-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 57 | Chiller plant room layout                                                               | 12 days  | Mon 30-09-19 | Sat 12-10-19 |      |    |    |    |      |    |    |    |      |    |    |
| 58 | Plant room HVAC standard details                                                        | 12 days  | Mon 30-09-19 | Sat 12-10-19 |      |    |    |    |      |    |    |    |      |    |    |
| 59 | HVAC standard details                                                                   | 12 days  | Mon 30-09-19 | Sat 12-10-19 |      |    |    |    |      |    |    |    |      |    |    |
| 60 | HVAC Schematic/DD drawings Approval                                                     | 88 days  | Thu 19-09-19 | Sat 14-12-19 |      |    |    |    |      |    |    |    |      |    |    |
| 61 | Sub-Structure                                                                           | 8 days   | Thu 19-09-19 | Fri 27-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 62 | 1st Basement AC and Ventilation layout                                                  | 8 days   | Thu 19-09-19 | Fri 27-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 63 | 2nd Basement AC & Ventilation layout                                                    | 8 days   | Thu 19-09-19 | Fri 27-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 64 | 3rd Basement AC & Ventilation layout                                                    | 8 days   | Thu 19-09-19 | Fri 27-09-19 |      |    |    |    |      |    |    |    |      |    |    |
| 65 | Super-Structure                                                                         | 84 days  | Tue 24-09-19 | Sat 14-12-19 |      |    |    |    |      |    |    |    |      |    |    |
| 66 | Ground/stilt 1 floor AC & Ventilation Layout                                            | 8 days   | Thu 10-10-19 | Thu 17-10-19 |      |    |    |    |      |    |    |    |      |    |    |
| 67 | First floor parking AC & Ventilation Layout                                             | 8 days   | Thu 10-10-19 | Thu 17-10-19 |      |    |    |    |      |    |    |    |      |    |    |
| 68 | Second floor parking AC & Ventilation Layout                                            | 8 days   | Wed 30-10-19 | Wed 06-11-19 |      |    |    |    |      |    |    |    |      |    |    |
| 69 | Third floor parking AC & Ventilation Layout                                             | 8 days   | Wed 30-10-19 | Wed 06-11-19 |      |    |    |    |      |    |    |    |      |    |    |
| 70 | Fouth floor AC & Ventilation Layout                                                     | 8 days   | Wed 30-10-19 | Wed 06-11-19 |      |    |    |    |      |    |    |    |      |    |    |
| 71 | Fifth floor AC & Ventilation Layout                                                     | 8 days   | Mon 18-11-19 | Tue 26-11-19 |      |    |    |    |      |    |    |    |      |    |    |
| 72 | Sixth floor AC & Ventilation Layout                                                     | 8 days   | Mon 18-11-19 | Tue 26-11-19 |      |    |    |    |      |    |    |    |      |    |    |
| 73 | Seventh floor AC & Ventilation Layout                                                   | 8 days   | Sat 07-12-19 | Sat 14-12-19 |      |    |    |    |      |    |    |    |      |    |    |
| 74 | Typical Floor AC & Ventilation Layout (8th,10th,11th,12th, 14th, 15th & 16th)           | 8 days   | Sat 07-12-19 | Sat 14-12-19 |      |    |    |    |      |    |    |    |      |    |    |
| 75 | Typical Floor AC & Ventilation Layout (9th & 13th)                                      | 8 days   | Sat 07-12-19 | Sat 14-12-19 |      |    |    |    |      |    |    |    |      |    |    |
| 76 | Terrace floor AC & Ventilation Layout                                                   | 8 days   | Sat 07-12-19 | Sat 14-12-19 |      |    |    |    |      |    |    |    |      |    |    |


Critical


Critical Split

Task

Split

Milestone

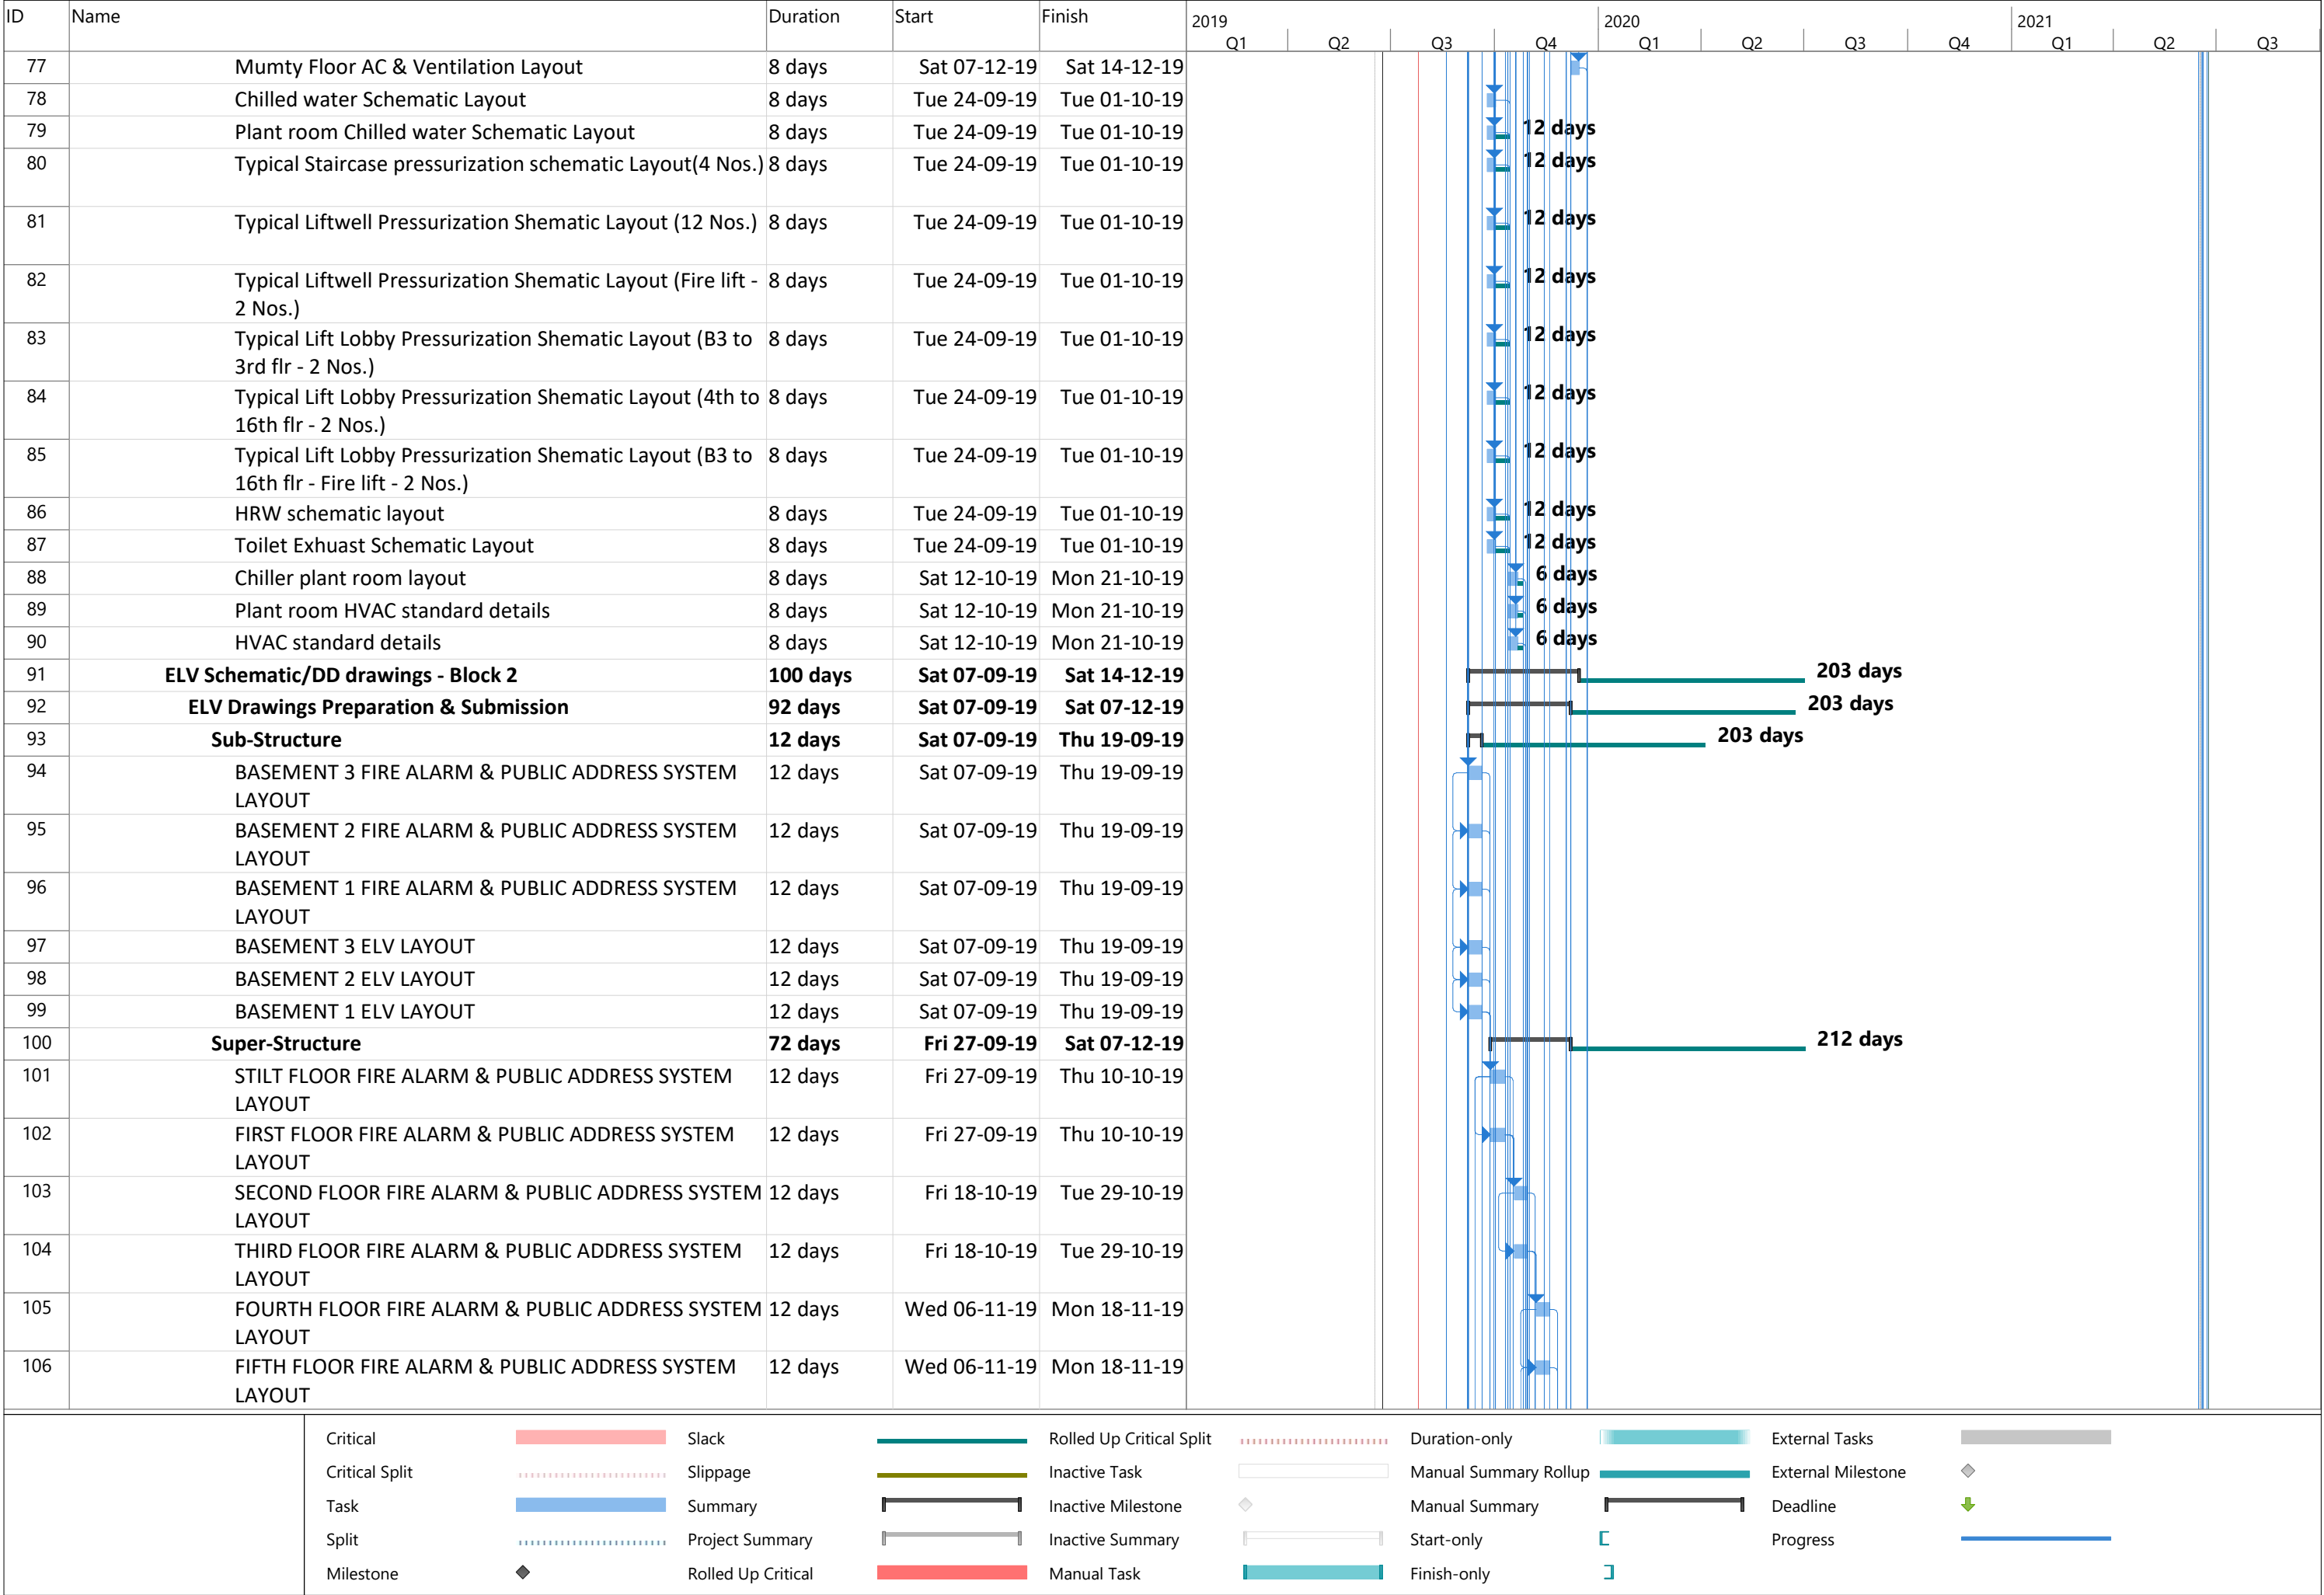

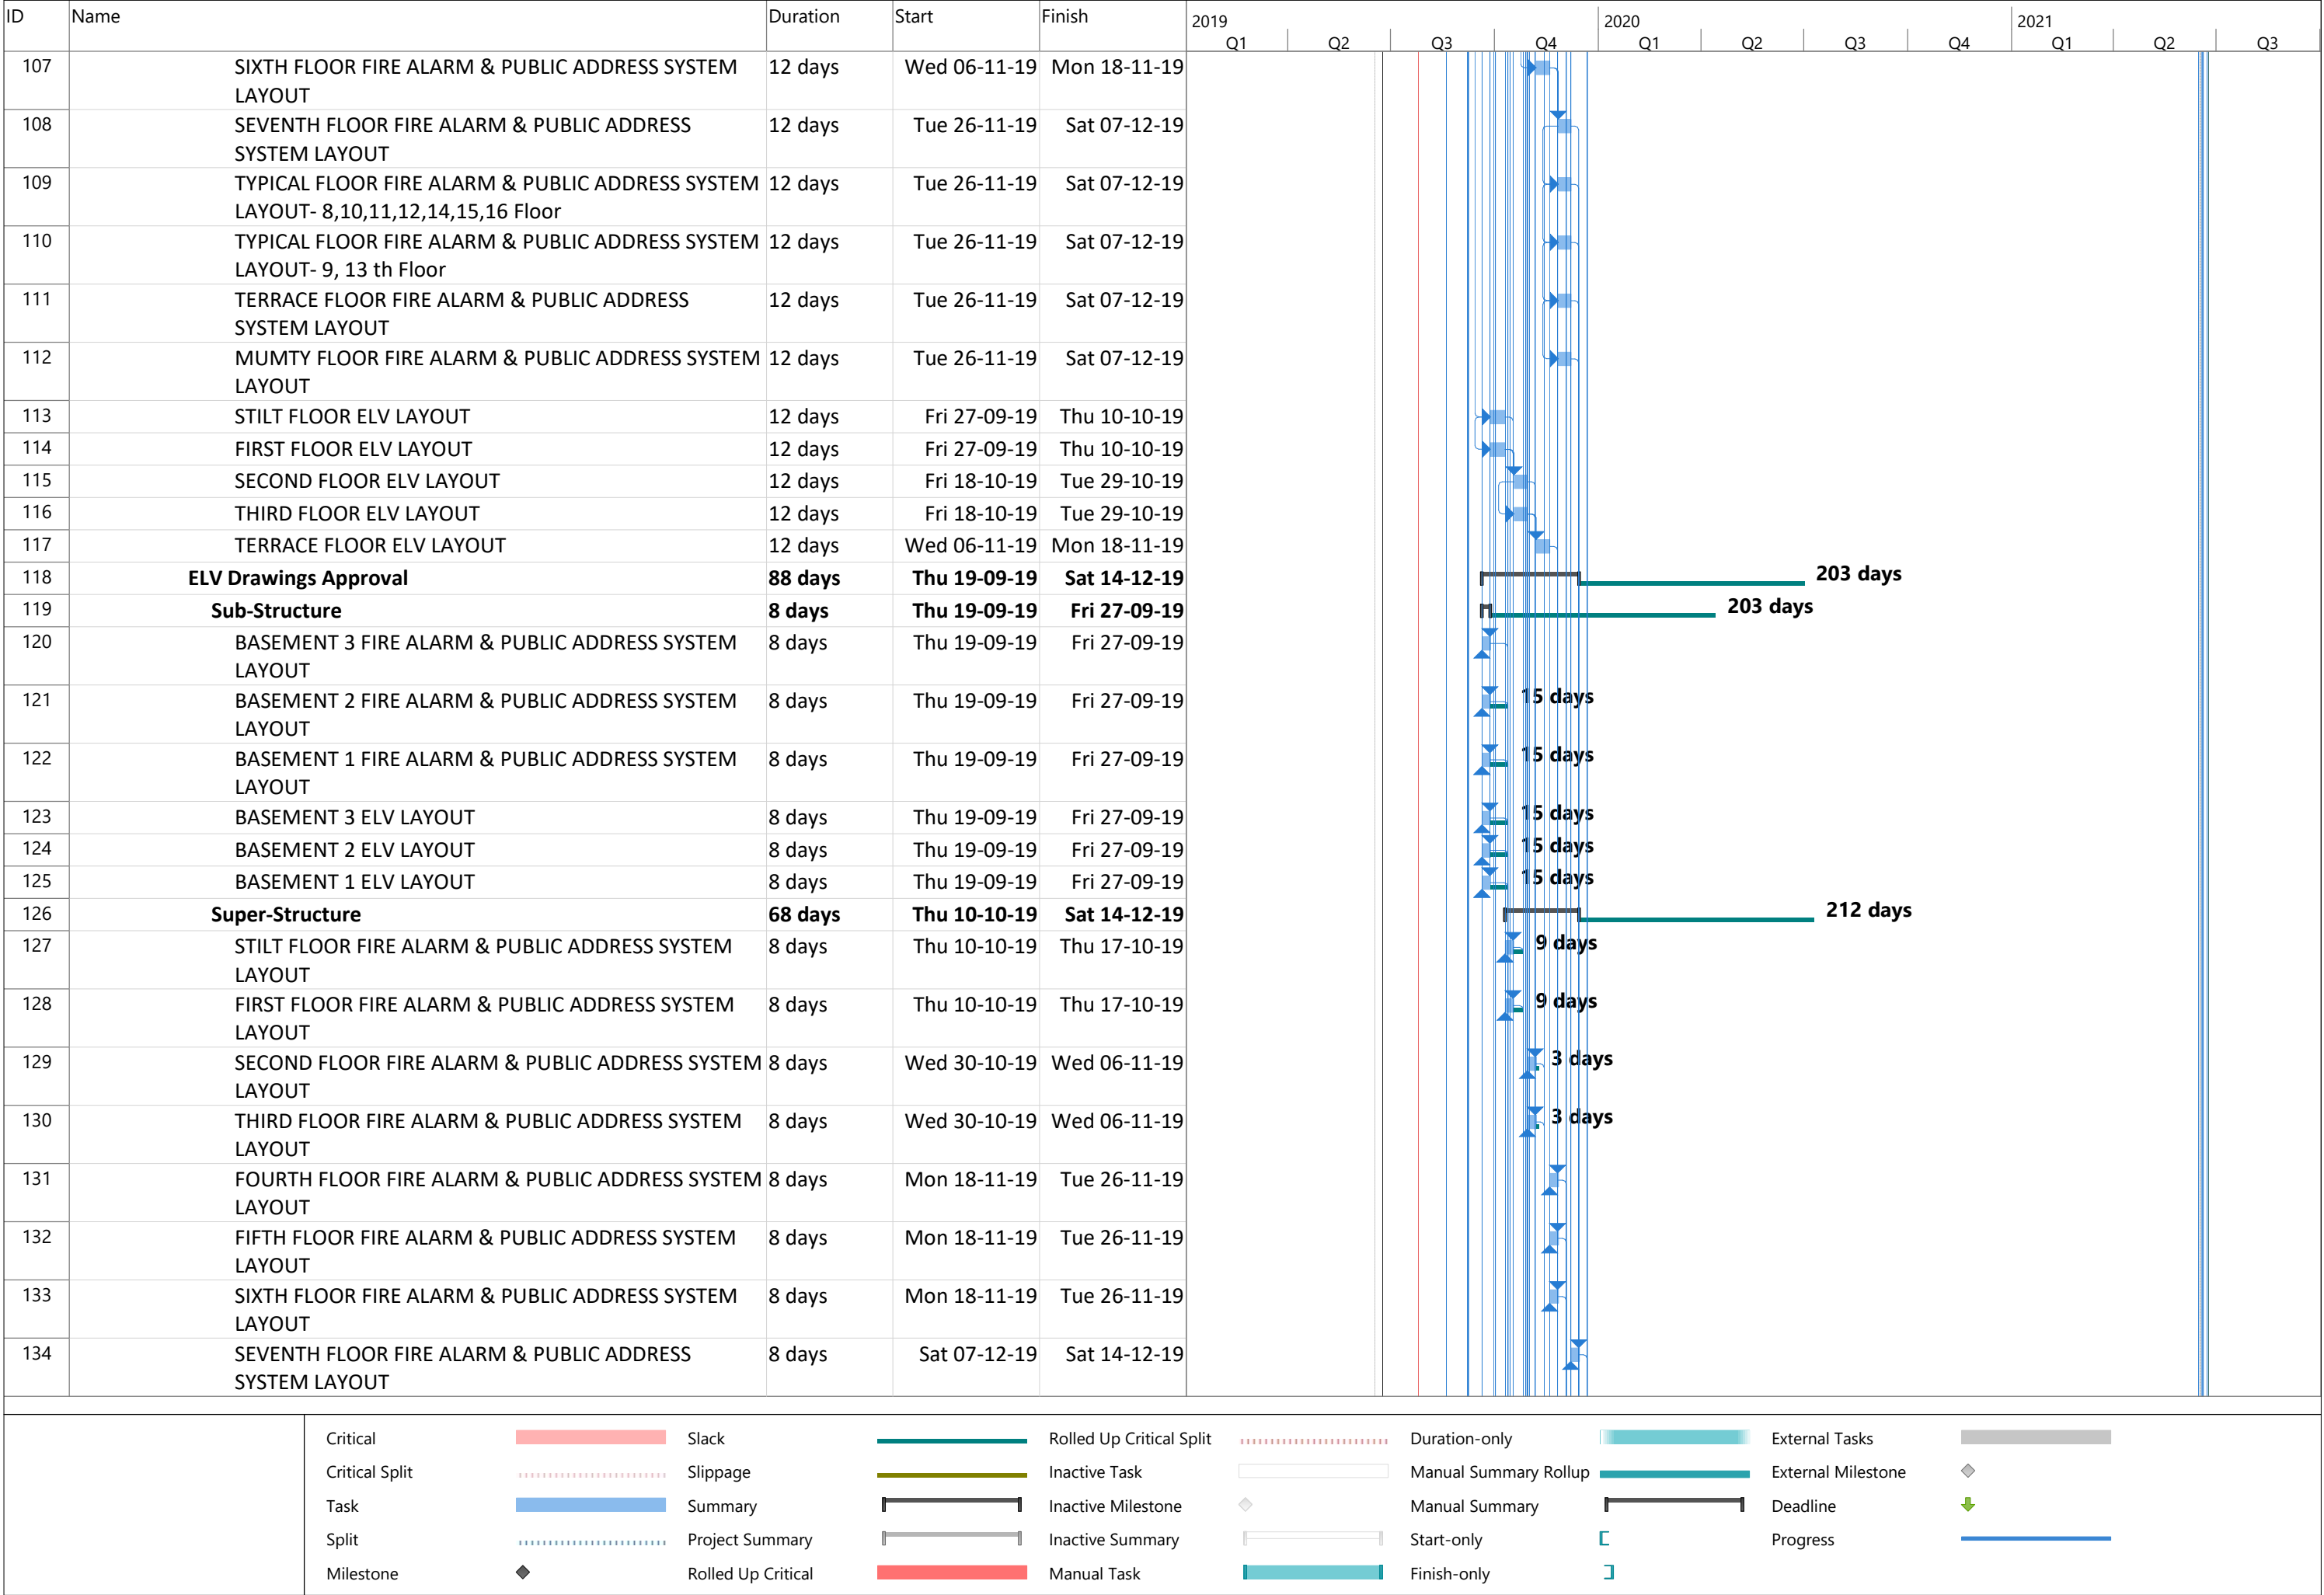

| ID  | Name                                                                               | Duration | Start        | Finish       | 2019 |    |    |    | 2020 |    |    |    | 2021 |    |    |  |
|-----|------------------------------------------------------------------------------------|----------|--------------|--------------|------|----|----|----|------|----|----|----|------|----|----|--|
|     |                                                                                    |          |              |              | Q1   | Q2 | Q3 | Q4 | Q1   | Q2 | Q3 | Q4 | Q1   | Q2 | Q3 |  |
| 135 | TYPICAL FLOOR FIRE ALARM & PUBLIC ADDRESS SYSTEM LAYOUT- 8,10,11,12,14,15,16 Floor | 8 days   | Sat 07-12-19 | Sat 14-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 136 | TYPICAL FLOOR FIRE ALARM & PUBLIC ADDRESS SYSTEM LAYOUT- 9, 13 th Floor            | 8 days   | Sat 07-12-19 | Sat 14-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 137 | TERRACE FLOOR FIRE ALARM & PUBLIC ADDRESS SYSTEM LAYOUT                            | 8 days   | Sat 07-12-19 | Sat 14-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 138 | MUMTY FLOOR FIRE ALARM & PUBLIC ADDRESS SYSTEM LAYOUT                              | 8 days   | Sat 07-12-19 | Sat 14-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 139 | STILT FLOOR ELV LAYOUT                                                             | 8 days   | Thu 10-10-19 | Thu 17-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 140 | FIRST FLOOR ELV LAYOUT                                                             | 8 days   | Thu 10-10-19 | Thu 17-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 141 | SECOND FLOOR ELV LAYOUT                                                            | 8 days   | Wed 30-10-19 | Wed 06-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 142 | THIRD FLOOR ELV LAYOUT                                                             | 8 days   | Wed 30-10-19 | Wed 06-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 143 | TERRACE FLOOR ELV LAYOUT                                                           | 8 days   | Mon 18-11-19 | Tue 26-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 144 | PHE Schematic/DD drawings - Block 2                                                | 100 days | Sat 07-09-19 | Sat 14-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 145 | PHE Drawings Preparation & Submission                                              | 92 days  | Sat 07-09-19 | Sat 07-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 146 | Water Supply Layout for 3rd Basement Floor                                         | 12 days  | Sat 07-09-19 | Thu 19-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 147 | Drainage Layout for 3rd Basement Floor                                             | 12 days  | Sat 07-09-19 | Thu 19-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 148 | Water Supply Layout for 2nd Basement Floor                                         | 12 days  | Sat 07-09-19 | Thu 19-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 149 | Drainage Layout for 2nd Basement Floor                                             | 12 days  | Sat 07-09-19 | Thu 19-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 150 | Water Supply Layout for 1st Basement Floor                                         | 12 days  | Sat 07-09-19 | Thu 19-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 151 | Drainage Layout for 1st Basement Floor                                             | 12 days  | Sat 07-09-19 | Thu 19-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 152 | Water Supply Layout for Stilt Floor Parking                                        | 12 days  | Fri 27-09-19 | Thu 10-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 153 | Drainage Layout for Stilt Floor Parking                                            | 12 days  | Fri 27-09-19 | Thu 10-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 154 | Water Supply Layout for 1st Floor Parking                                          | 12 days  | Fri 27-09-19 | Thu 10-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 155 | Drainage Layout for 1st Floor Parking                                              | 12 days  | Fri 27-09-19 | Thu 10-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 156 | Water Supply Layout for 2nd Floor Parking                                          | 12 days  | Fri 18-10-19 | Tue 29-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 157 | Drainage Layout for 2nd Floor Parking                                              | 12 days  | Fri 18-10-19 | Tue 29-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 158 | Water Supply Layout for 3rd Parking Floor                                          | 12 days  | Fri 18-10-19 | Tue 29-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 159 | Drainage Layout for 3rd Parking Floor                                              | 12 days  | Fri 18-10-19 | Tue 29-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 160 | Water Supply Layout for 4th Floor                                                  | 12 days  | Fri 18-10-19 | Tue 29-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 161 | Drainage Layout for 4th Floor                                                      | 12 days  | Fri 18-10-19 | Tue 29-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 162 | Water Supply Layout for 5th Floor                                                  | 12 days  | Wed 06-11-19 | Mon 18-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 163 | Drainage Layout for 5th Floor                                                      | 12 days  | Wed 06-11-19 | Mon 18-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 164 | Water Supply Layout for 6th Floor                                                  | 12 days  | Wed 06-11-19 | Mon 18-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 165 | Drainage Layout for 6th Floor                                                      | 12 days  | Wed 06-11-19 | Mon 18-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 166 | Water Supply Layout for 7th Floor                                                  | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 167 | Drainage Layout for 7th Floor                                                      | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 168 | Water Supply Layout for Typical Floor plan(8th,10th,11th,12th,14th, 15th & 16th)   | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 169 | Drainage Layout for Typical Floor plan(8th,10th,11th,12th,14th, 15th & 16th)       | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 170 | Water Supply Layout for 9th & 13th - Refuge Floor                                  | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 171 | Drainage Layout for 9th & 13th - Refuge Floor                                      | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |

Critical

Critical Split

Task

Split

Milestone

Slack

Slippage

Summary

Project Summary

Rolled Up Critical

Rolled Up Critical Split

Inactive Task

Inactive Milestone

Inactive Summary

Manual Task

Duration-only

Manual Summary Rollup

Manual Summary

Start-only


Finish-only


External Tasks


External Milestone

Deadline

Progress

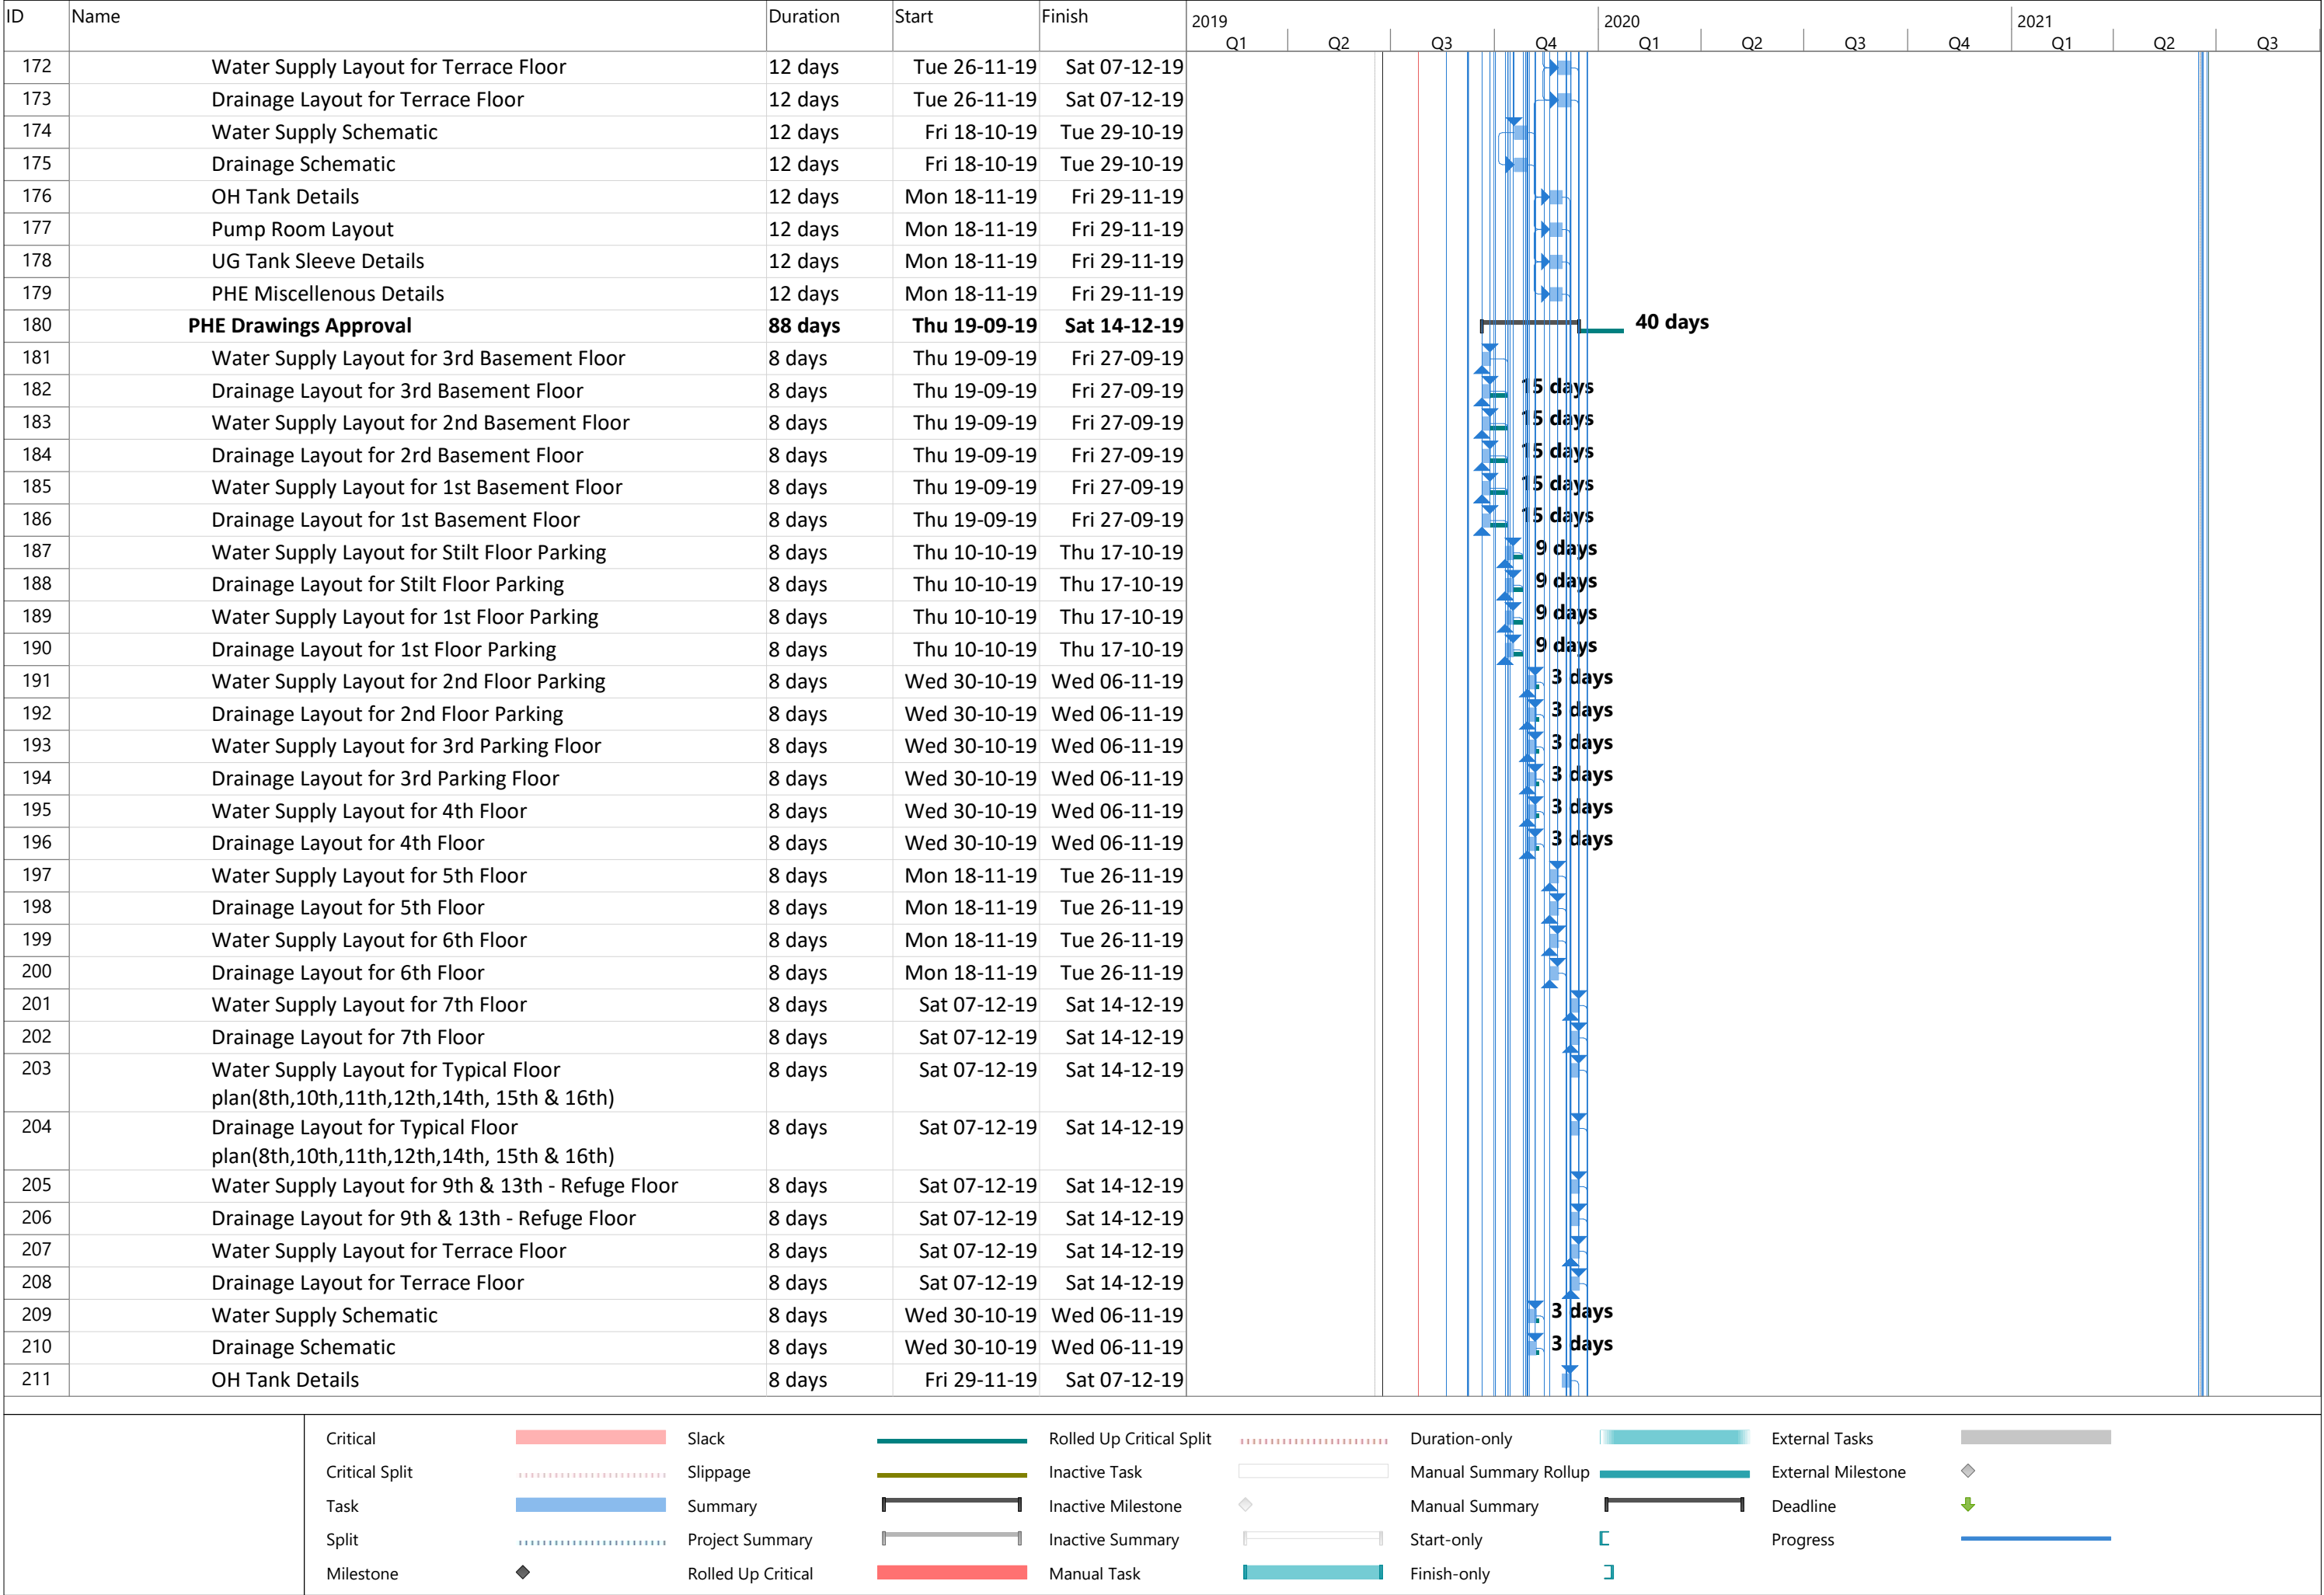

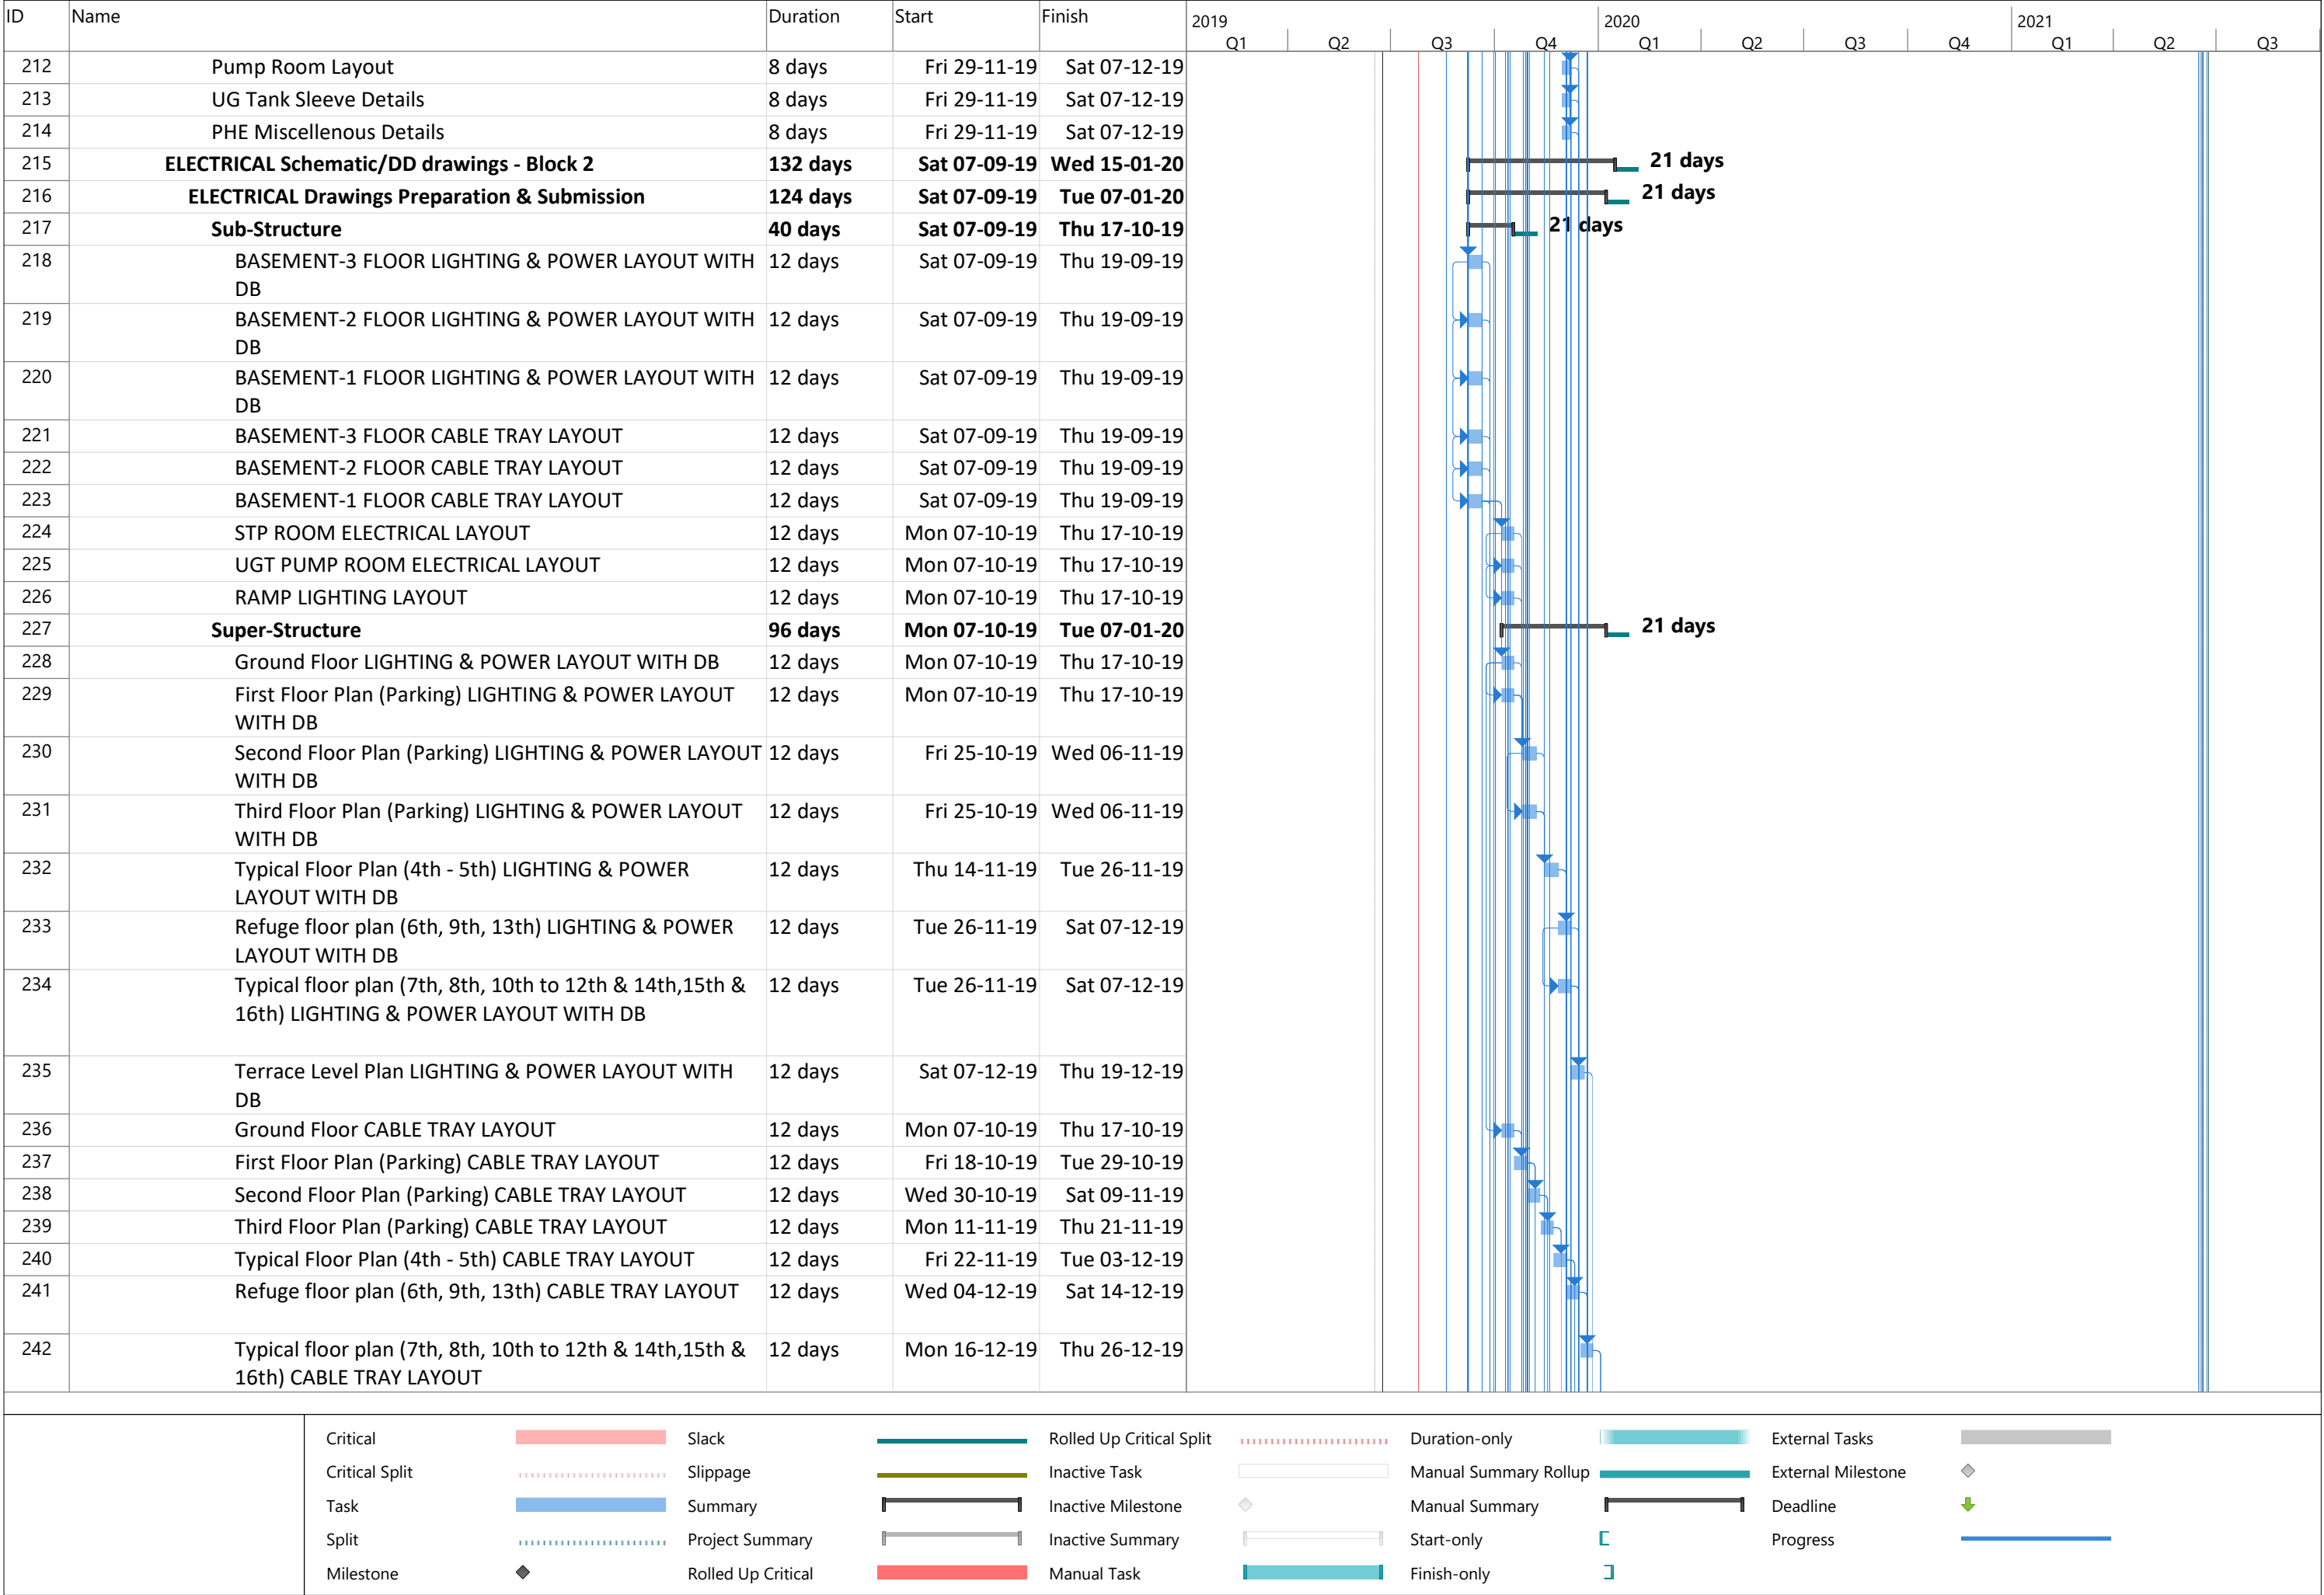

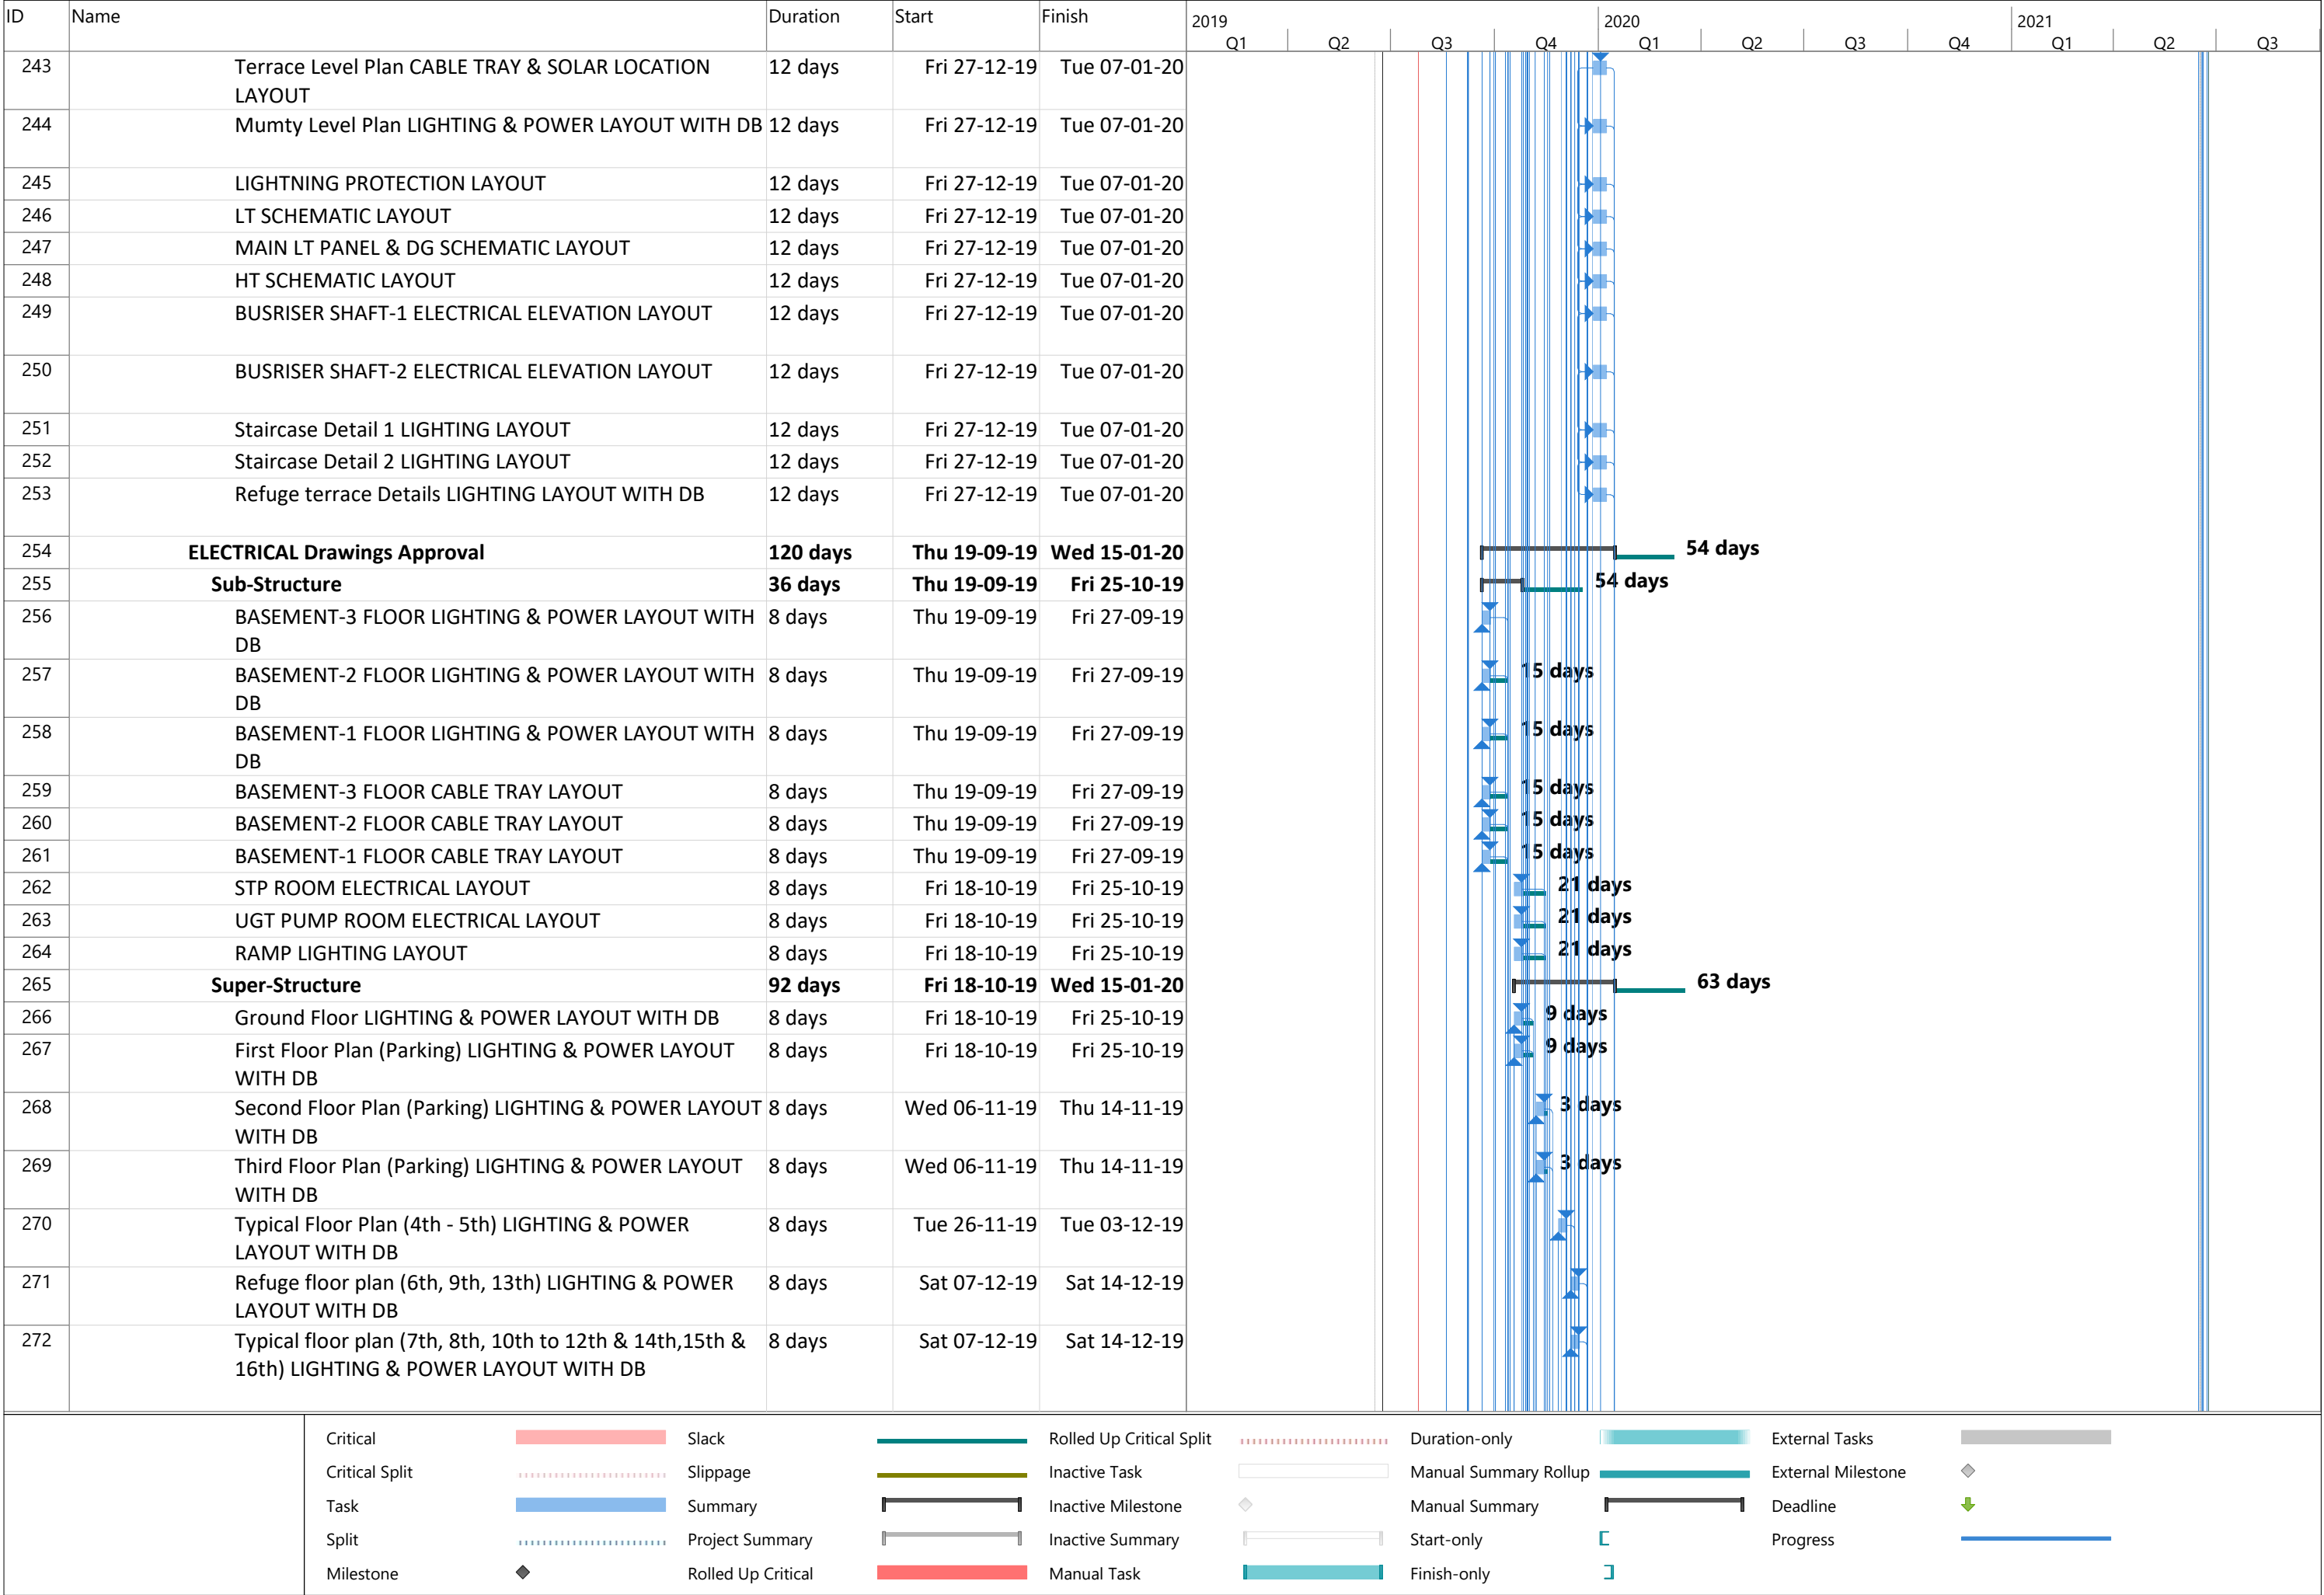

| ID  | Name                                                                             | Duration | Start        | Finish       | 2019 |    |    |    | 2020 |    | 2021 |    |
|-----|----------------------------------------------------------------------------------|----------|--------------|--------------|------|----|----|----|------|----|------|----|
|     |                                                                                  |          |              |              | Q1   | Q2 | Q3 | Q4 | Q1   | Q2 | Q3   | Q4 |
| 273 | Terrace Level Plan LIGHTING & POWER LAYOUT WITH DB                               | 8 days   | Thu 19-12-19 | Thu 26-12-19 |      |    |    |    |      |    |      |    |
| 274 | Ground Floor CABLE TRAY LAYOUT                                                   | 8 days   | Fri 18-10-19 | Fri 25-10-19 |      |    |    |    |      |    |      |    |
| 275 | First Floor Plan (Parking) CABLE TRAY LAYOUT                                     | 8 days   | Wed 30-10-19 | Wed 06-11-19 |      |    |    |    |      |    |      |    |
| 276 | Second Floor Plan (Parking) CABLE TRAY LAYOUT                                    | 8 days   | Mon 11-11-19 | Mon 18-11-19 |      |    |    |    |      |    |      |    |
| 277 | Third Floor Plan (Parking) CABLE TRAY LAYOUT                                     | 8 days   | Fri 22-11-19 | Fri 29-11-19 |      |    |    |    |      |    |      |    |
| 278 | Typical Floor Plan (4th - 5th) CABLE TRAY LAYOUT                                 | 8 days   | Wed 04-12-19 | Wed 11-12-19 |      |    |    |    |      |    |      |    |
| 279 | Refuge floor plan (6th, 9th, 13th) CABLE TRAY LAYOUT                             | 8 days   | Mon 16-12-19 | Mon 23-12-19 |      |    |    |    |      |    |      |    |
| 280 | Typical floor plan (7th, 8th, 10th to 12th & 14th,15th & 16th) CABLE TRAY LAYOUT | 8 days   | Fri 27-12-19 | Fri 03-01-20 |      |    |    |    |      |    |      |    |
| 281 | Terrace Level Plan CABLE TRAY & SOLAR LOCATION LAYOUT                            | 8 days   | Wed 08-01-20 | Wed 15-01-20 |      |    |    |    |      |    |      |    |
| 282 | Mumty Level Plan LIGHTING & POWER LAYOUT WITH DB                                 | 8 days   | Wed 08-01-20 | Wed 15-01-20 |      |    |    |    |      |    |      |    |
| 283 | LIGHTNING PROTECTION LAYOUT                                                      | 8 days   | Wed 08-01-20 | Wed 15-01-20 |      |    |    |    |      |    |      |    |
| 284 | LT SCHEMATIC LAYOUT                                                              | 8 days   | Wed 08-01-20 | Wed 15-01-20 |      |    |    |    |      |    |      |    |
| 285 | MAIN LT PANEL & DG SCHEMATIC LAYOUT                                              | 8 days   | Wed 08-01-20 | Wed 15-01-20 |      |    |    |    |      |    |      |    |
| 286 | HT SCHEMATIC LAYOUT                                                              | 8 days   | Wed 08-01-20 | Wed 15-01-20 |      |    |    |    |      |    |      |    |
| 287 | BUSRISER SHAFT-1 ELECTRICAL ELEVATION LAYOUT                                     | 8 days   | Wed 08-01-20 | Wed 15-01-20 |      |    |    |    |      |    |      |    |
| 288 | BUSRISER SHAFT-2 ELECTRICAL ELEVATION LAYOUT                                     | 8 days   | Wed 08-01-20 | Wed 15-01-20 |      |    |    |    |      |    |      |    |
| 289 | Staircase Detail 1 LIGHTING LAYOUT                                               | 8 days   | Wed 08-01-20 | Wed 15-01-20 |      |    |    |    |      |    |      |    |
| 290 | Staircase Detail 2 LIGHTING LAYOUT                                               | 8 days   | Wed 08-01-20 | Wed 15-01-20 |      |    |    |    |      |    |      |    |
| 291 | Refuge terrace Details LIGHTING LAYOUT WITH DB                                   | 8 days   | Wed 08-01-20 | Wed 15-01-20 |      |    |    |    |      |    |      |    |
| 292 | FF Schematic/DD drawings - Block 2                                               | 120 days | Sat 07-09-19 | Fri 03-01-20 |      |    |    |    |      |    |      |    |
| 293 | FF Drawings Preparation & Submission                                             | 112 days | Sat 07-09-19 | Thu 26-12-19 |      |    |    |    |      |    |      |    |
| 294 | Fire Fighting Layout for 3rd Basement Floor                                      | 12 days  | Sat 07-09-19 | Thu 19-09-19 |      |    |    |    |      |    |      |    |
| 295 | Fire Fighting Layout for 2nd Basement Floor                                      | 12 days  | Sat 07-09-19 | Thu 19-09-19 |      |    |    |    |      |    |      |    |
| 296 | Fire Fighting Layout for 1st Basement Floor                                      | 12 days  | Sat 07-09-19 | Thu 19-09-19 |      |    |    |    |      |    |      |    |
| 297 | Fire Fighting Layout for Stilt Floor Parking                                     | 12 days  | Fri 27-09-19 | Thu 10-10-19 |      |    |    |    |      |    |      |    |
| 298 | Fire Fighting Layout for 1st Floor Parking                                       | 12 days  | Fri 27-09-19 | Thu 10-10-19 |      |    |    |    |      |    |      |    |
| 299 | Fire Fighting Layout for 2nd Floor Parking                                       | 12 days  | Fri 18-10-19 | Tue 29-10-19 |      |    |    |    |      |    |      |    |
| 300 | Fire Fighting Layout for 3rd Floor Parking                                       | 12 days  | Fri 18-10-19 | Tue 29-10-19 |      |    |    |    |      |    |      |    |
| 301 | Fire Fighting Layout for 4th Floor                                               | 12 days  | Fri 18-10-19 | Tue 29-10-19 |      |    |    |    |      |    |      |    |
| 302 | Fire Fighting Layout for 5th Floor                                               | 12 days  | Wed 06-11-19 | Mon 18-11-19 |      |    |    |    |      |    |      |    |
| 303 | Fire Fighting Layout for 6th Floor                                               | 12 days  | Wed 06-11-19 | Mon 18-11-19 |      |    |    |    |      |    |      |    |
| 304 | Fire Fighting Layout for 7th Floor                                               | 12 days  | Wed 06-11-19 | Mon 18-11-19 |      |    |    |    |      |    |      |    |
| 305 | Fire Fighting Layout for Typical Floor plan(8th,10th,11th,12th,14th,15th,16th )  | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |      |    |
| 306 | Fire Fighting Layout for 9th & 13th - Refuge Floor                               | 12 days  | Tue 26-11-19 | Sat 07-12-19 |      |    |    |    |      |    |      |    |

Critical

Critical Split

Task

Split

Milestone

Slack

Slippage

Summary

Project Summary

Rolled Up Critical

Rolled Up Critical Split

Inactive Task

Inactive Milestone

Inactive Summary

Manual Task

Duration-only

Manual Summary Rollup

Manual Summary

Start-only


Finish-only


External Tasks

External Milestone

Deadline

Progress

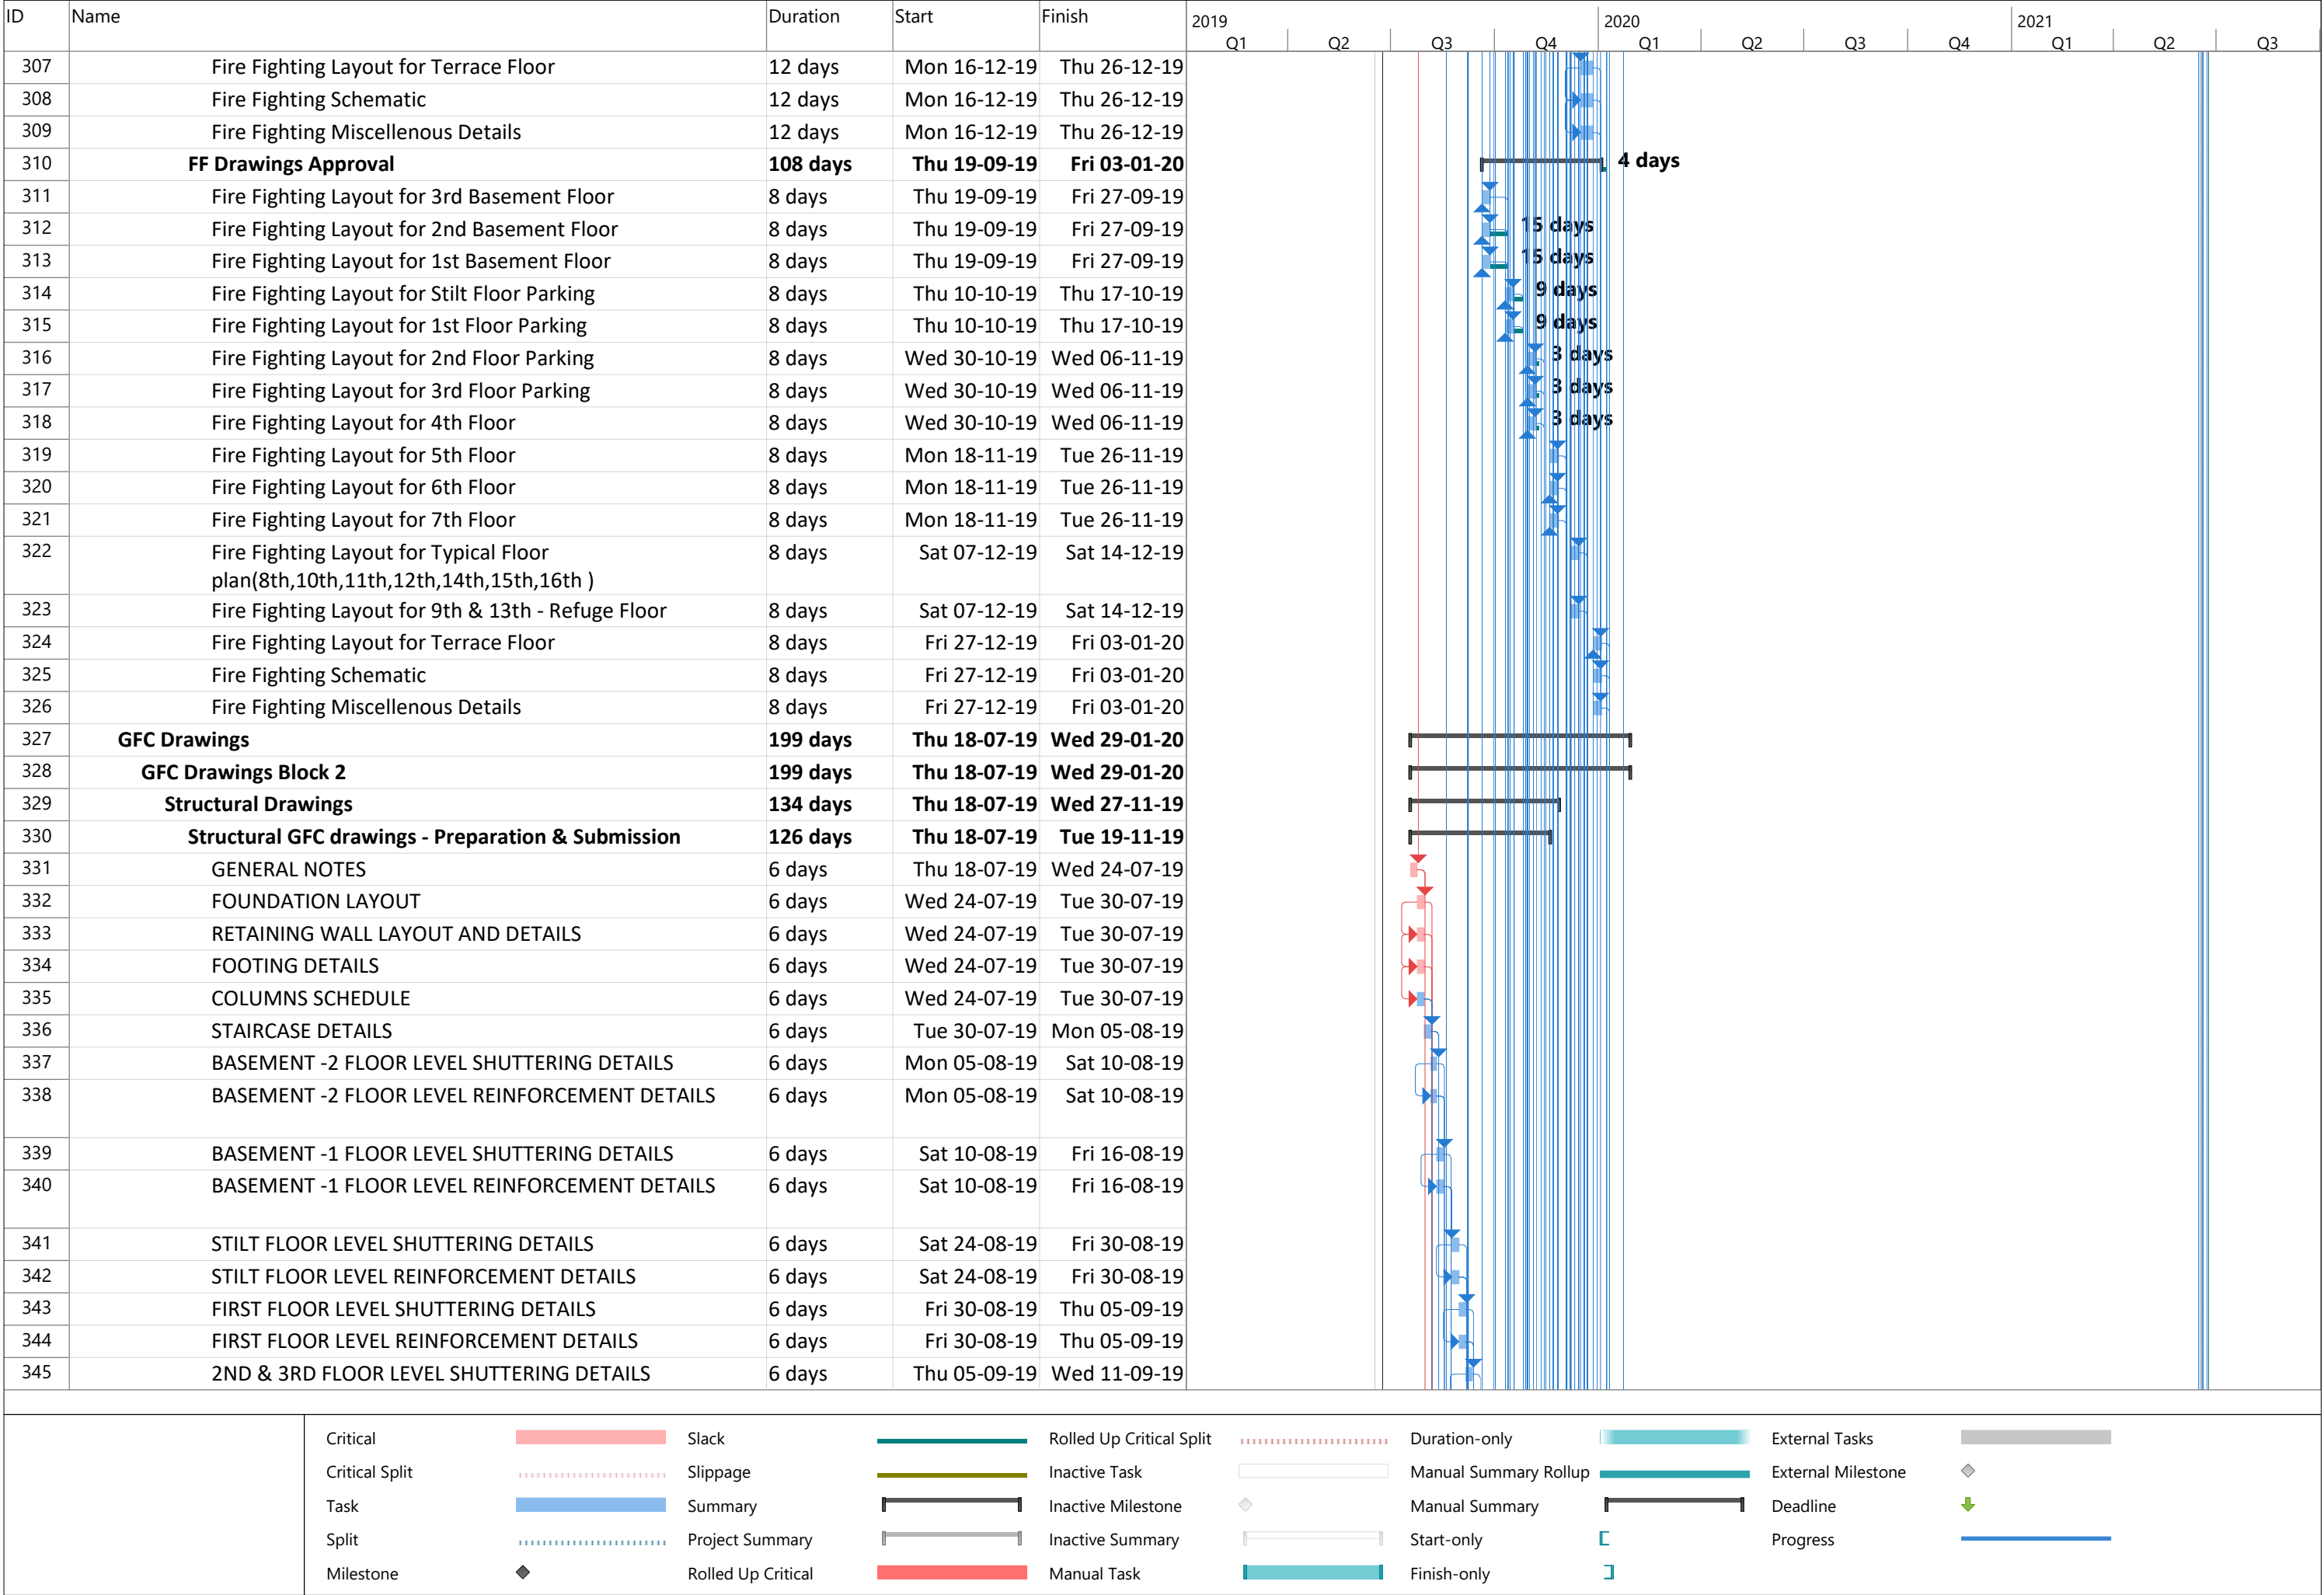

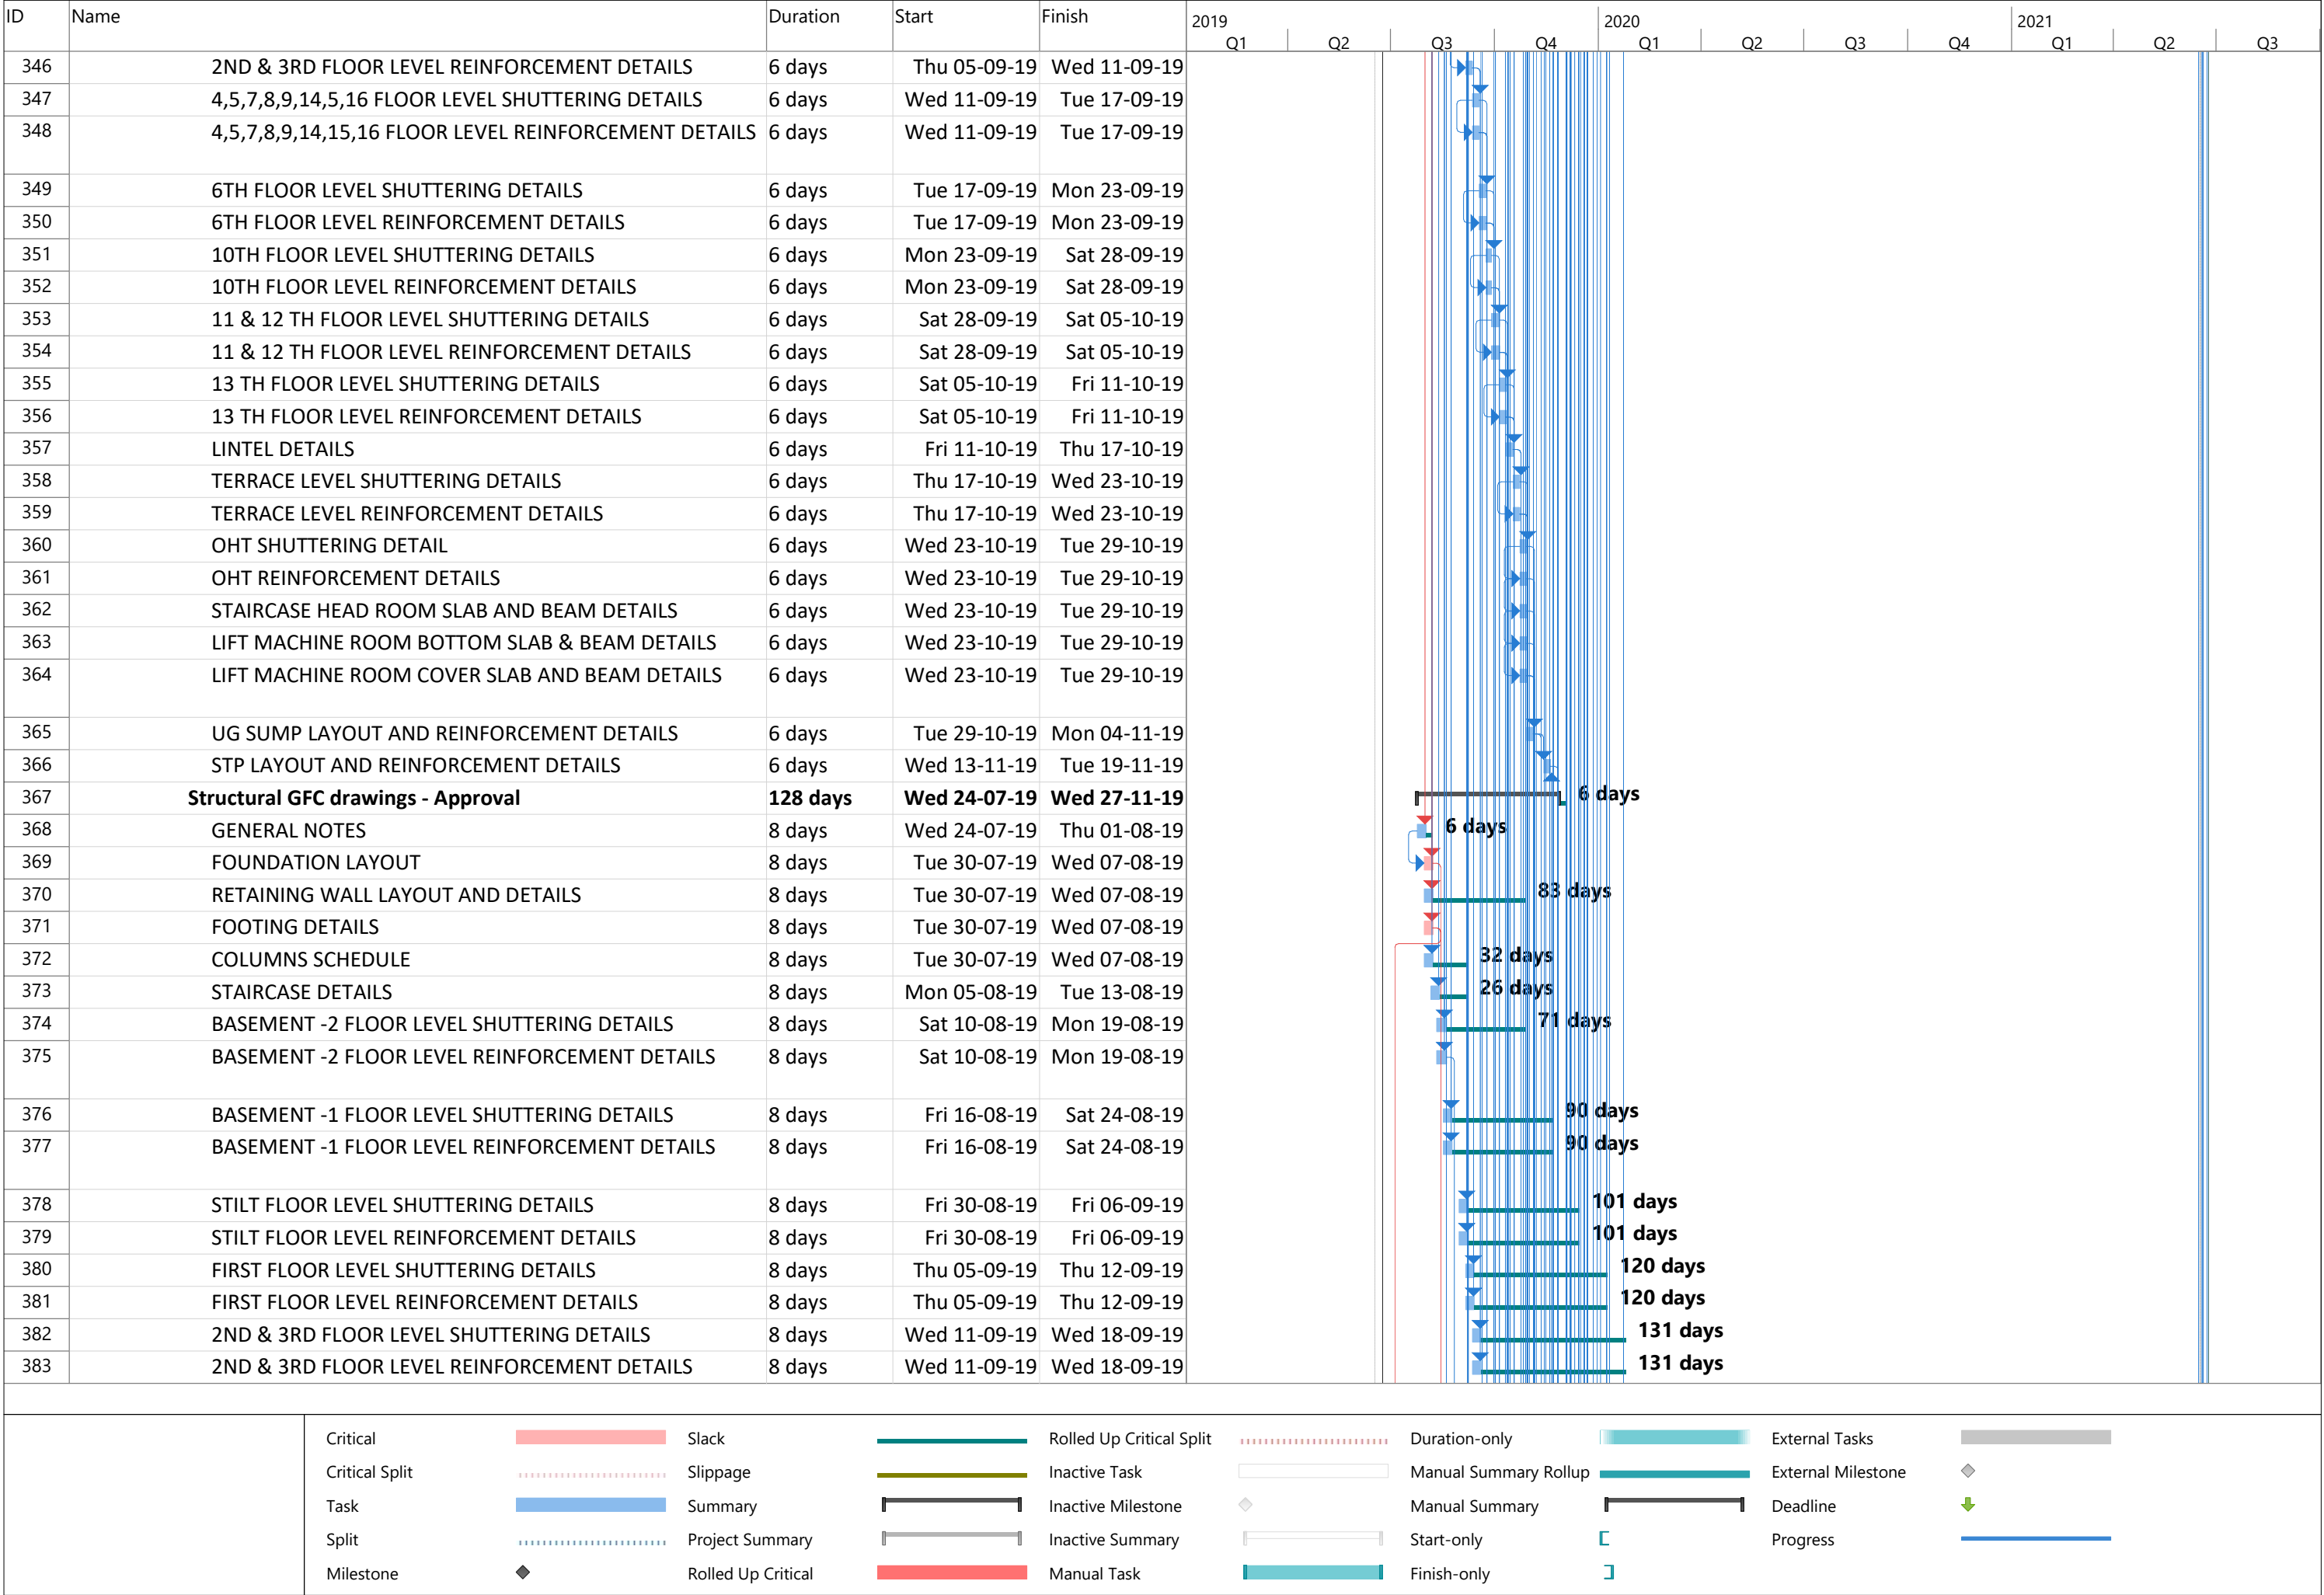

| ID  | Name                                                 | Duration | Start        | Finish       | 2019 |    |    |    | 2020 |    |    |    | 2021 |    |    |  |
|-----|------------------------------------------------------|----------|--------------|--------------|------|----|----|----|------|----|----|----|------|----|----|--|
|     |                                                      |          |              |              | Q1   | Q2 | Q3 | Q4 | Q1   | Q2 | Q3 | Q4 | Q1   | Q2 | Q3 |  |
| 384 | 4,5,7,8,9,14,5,16 FLOOR LEVEL SHUTTERING DETAILS     | 8 days   | Tue 17-09-19 | Tue 24-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 385 | 4,5,7,8,9,14,15,16 FLOOR LEVEL REINFORCEMENT DETAILS | 8 days   | Tue 17-09-19 | Tue 24-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 386 | 6TH FLOOR LEVEL SHUTTERING DETAILS                   | 8 days   | Mon 23-09-19 | Mon 30-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 387 | 6TH FLOOR LEVEL REINFORCEMENT DETAILS                | 8 days   | Mon 23-09-19 | Mon 30-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 388 | 10TH FLOOR LEVEL SHUTTERING DETAILS                  | 8 days   | Sat 28-09-19 | Mon 07-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 389 | 10TH FLOOR LEVEL REINFORCEMENT DETAILS               | 8 days   | Sat 28-09-19 | Mon 07-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 390 | 11 & 12 TH FLOOR LEVEL SHUTTERING DETAILS            | 8 days   | Sat 05-10-19 | Sat 12-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 391 | 11 & 12 TH FLOOR LEVEL REINFORCEMENT DETAILS         | 8 days   | Sat 05-10-19 | Sat 12-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 392 | 13 TH FLOOR LEVEL SHUTTERING DETAILS                 | 8 days   | Fri 11-10-19 | Fri 18-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 393 | 13 TH FLOOR LEVEL REINFORCEMENT DETAILS              | 8 days   | Fri 11-10-19 | Fri 18-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 394 | LINTEL DETAILS                                       | 8 days   | Thu 17-10-19 | Thu 24-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 395 | TERRACE LEVEL SHUTTERING DETAILS                     | 8 days   | Wed 23-10-19 | Wed 30-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 396 | TERRACE LEVEL REINFORCEMENT DETAILS                  | 8 days   | Wed 23-10-19 | Wed 30-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 397 | OHT SHUTTERING DETAIL                                | 8 days   | Tue 29-10-19 | Tue 05-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 398 | OHT REINFORCEMENT DETAILS                            | 8 days   | Tue 29-10-19 | Tue 05-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 399 | STAIRCASE HEAD ROOM SLAB AND BEAM DETAILS            | 8 days   | Tue 29-10-19 | Tue 05-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 400 | LIFT MACHINE ROOM BOTTOM SLAB & BEAM DETAILS         | 8 days   | Tue 29-10-19 | Tue 05-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 401 | LIFT MACHINE ROOM COVER SLAB AND BEAM DETAILS        | 8 days   | Tue 29-10-19 | Tue 05-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 402 | UG SUMP LAYOUT AND REINFORCEMENT DETAILS             | 8 days   | Mon 04-11-19 | Mon 11-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 403 | STP LAYOUT AND REINFORCEMENT DETAILS                 | 8 days   | Tue 19-11-19 | Wed 27-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 404 | Architectural Drawings                               | 53 days  | Mon 19-08-19 | Thu 10-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 405 | Architecture drawings Preparation & Submisson        | 45 days  | Mon 19-08-19 | Tue 01-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 406 | Substructure                                         | 34 days  | Mon 19-08-19 | Fri 20-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 407 | Basement Level 03 Plan                               | 6 days   | Mon 19-08-19 | Sat 24-08-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 408 | Basement Level 02 Plan                               | 6 days   | Mon 19-08-19 | Sat 24-08-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 409 | Basement Level 01 Plan                               | 6 days   | Mon 19-08-19 | Sat 24-08-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 410 | Basement setting out plan – Level 03                 | 6 days   | Mon 19-08-19 | Sat 24-08-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 411 | Ramp Details                                         | 6 days   | Sat 31-08-19 | Fri 06-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 412 | Watse Collection Room Details                        | 6 days   | Sat 14-09-19 | Fri 20-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 413 | Staircase Details                                    | 6 days   | Sat 31-08-19 | Fri 06-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 414 | Vertical Sleeves Details (If Any)                    | 6 days   | Sat 14-09-19 | Fri 20-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 415 | Lift Pit Details                                     | 6 days   | Sat 31-08-19 | Fri 06-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 416 | Shaft Schedule                                       | 6 days   | Sat 31-08-19 | Fri 06-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 417 | Miscellaneous Details                                | 6 days   | Sat 14-09-19 | Fri 20-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 418 | Sump Detail                                          | 6 days   | Sat 14-09-19 | Fri 20-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 419 | Pump Room Details                                    | 6 days   | Sat 14-09-19 | Fri 20-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 420 | Super-structure                                      | 32 days  | Sat 31-08-19 | Tue 01-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 421 | Building Setting Out (Ground/ Stilt Floor)           | 6 days   | Sat 31-08-19 | Thu 05-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 422 | Centreline plan                                      | 6 days   | Sat 31-08-19 | Thu 05-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 423 | Ground Floor Plan                                    | 6 days   | Sat 31-08-19 | Thu 05-09-19 |      |    |    |    |      |    |    |    |      |    |    |  |

Critical

Critical Split

Task

Split

Milestone

Slack

Slippage

Summary

Project Summary

Rolled Up Critical

Rolled Up Critical Split

Inactive Task

Inactive Milestone

Inactive Summary

Manual Task

Duration-only

Manual Summary Rollup

Manual Summary

Start-only


Finish-only


External Tasks


External Milestone

Deadline

Progress

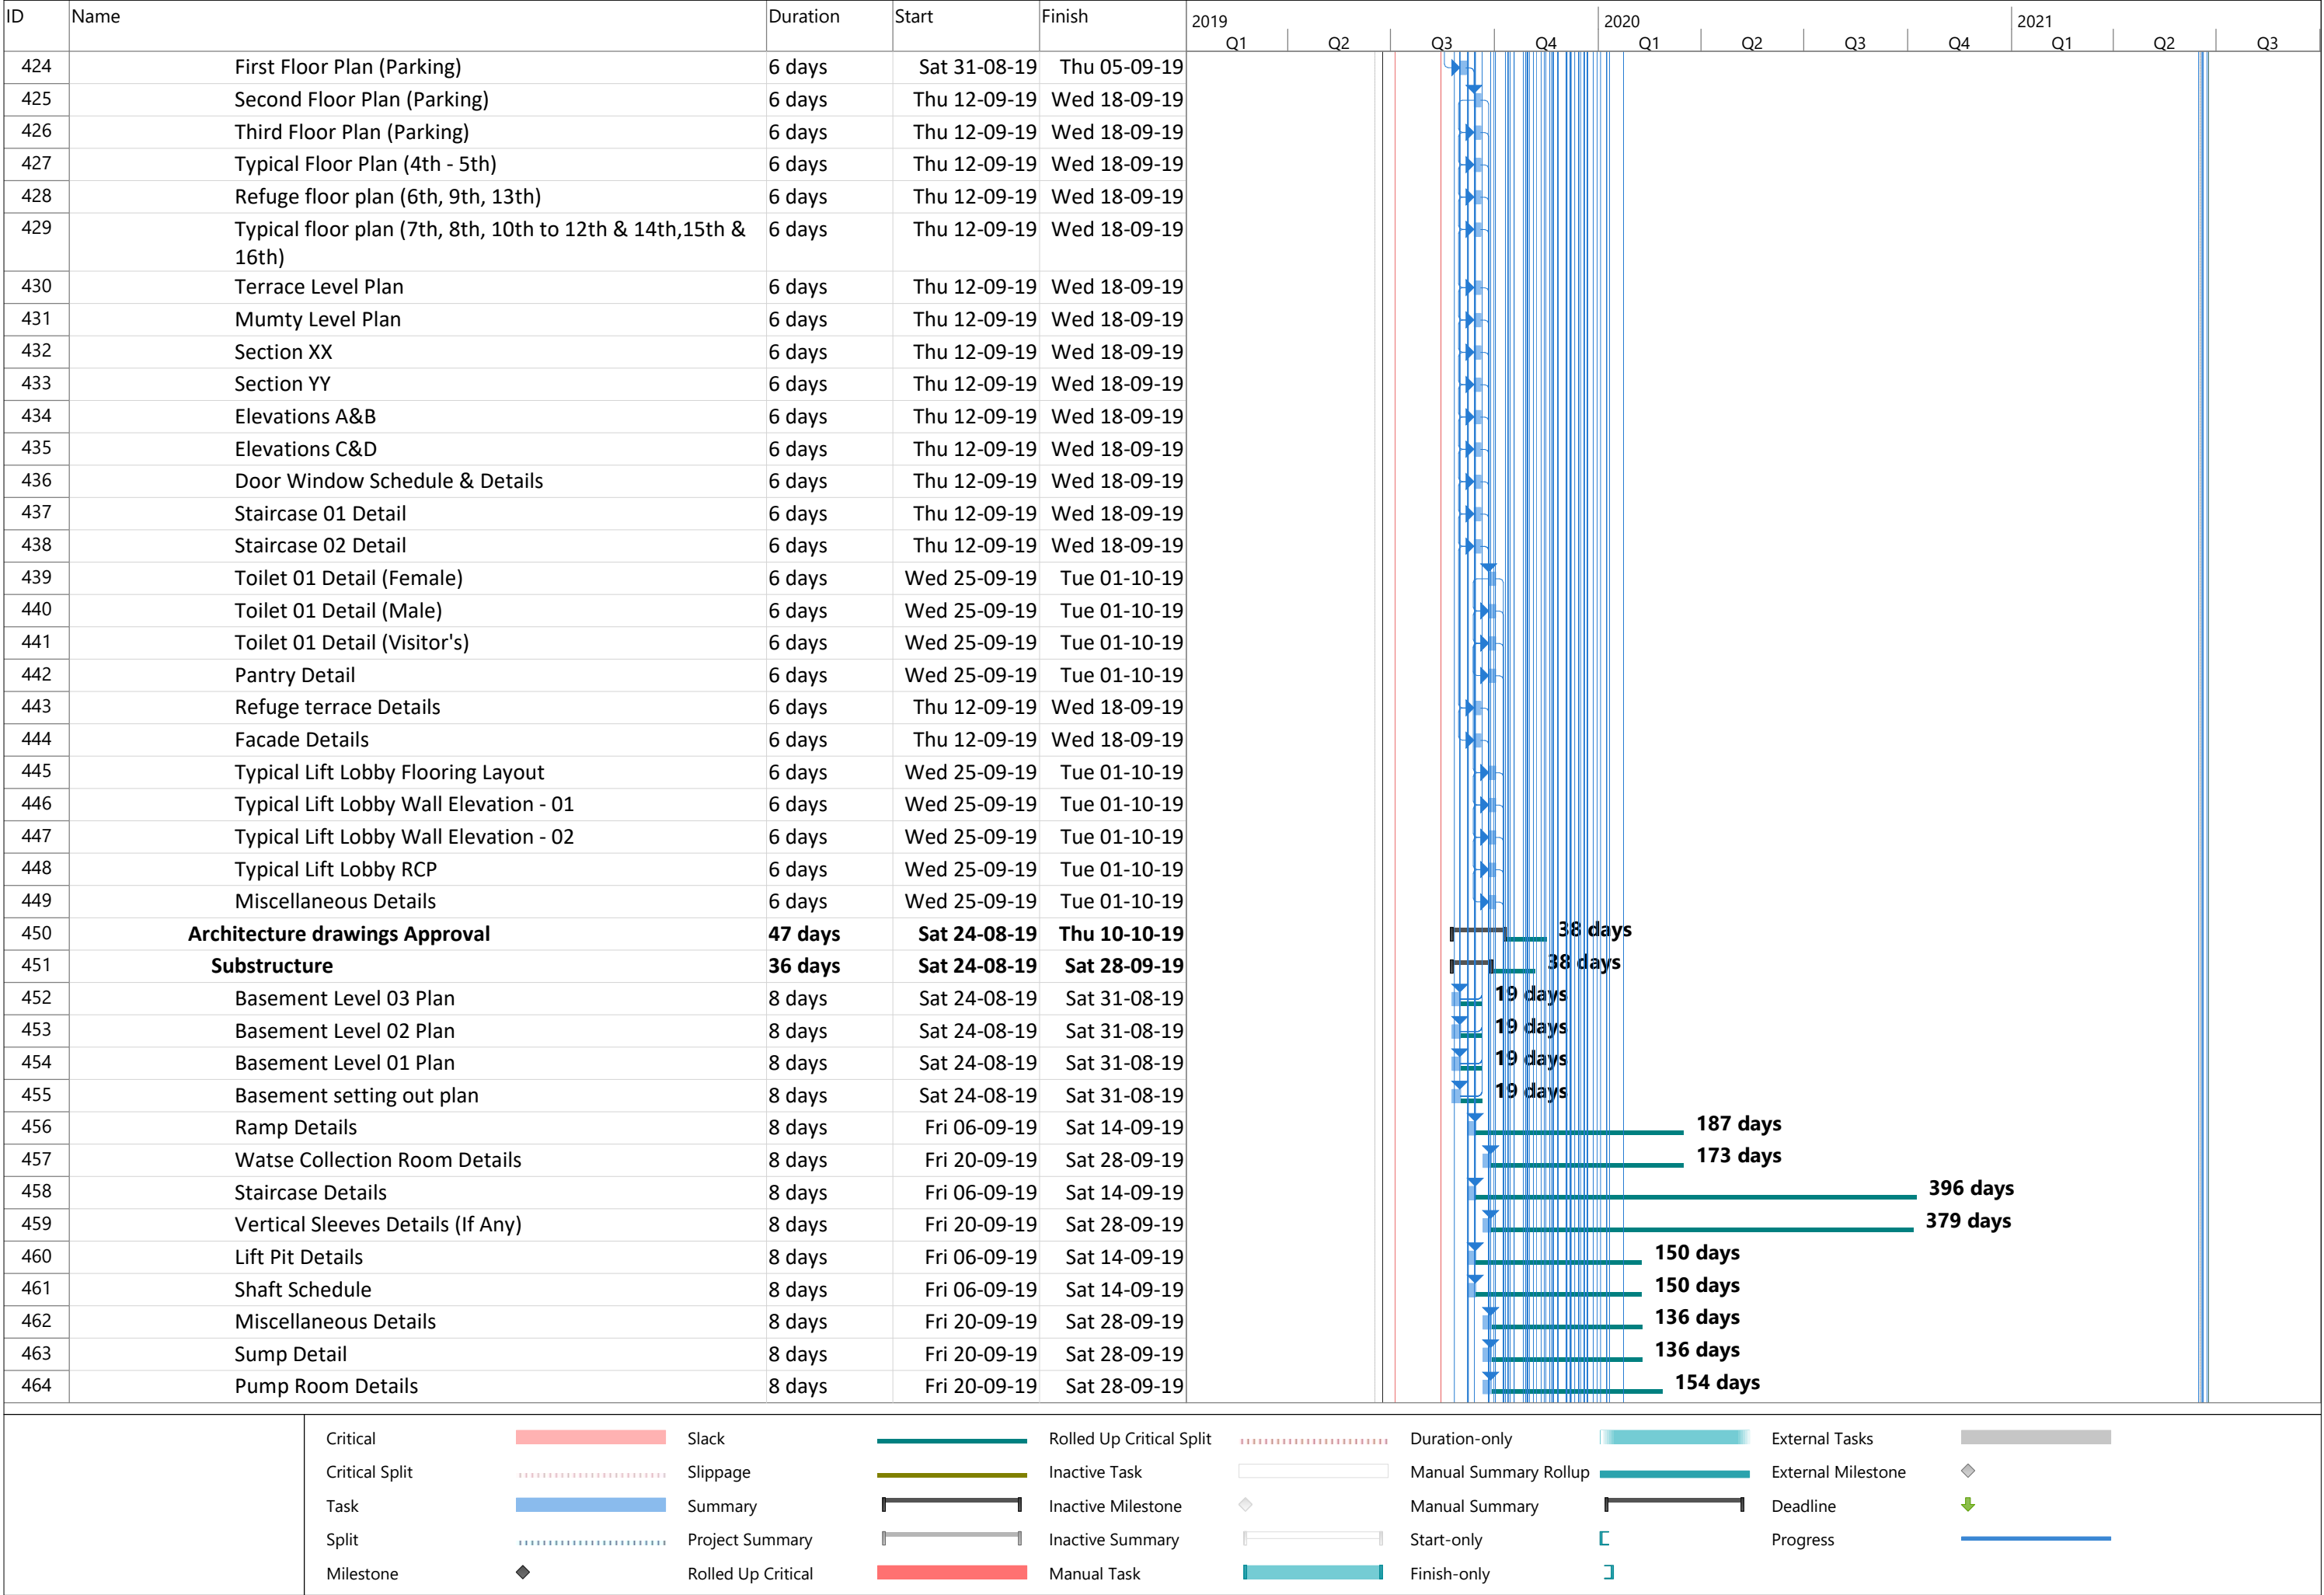

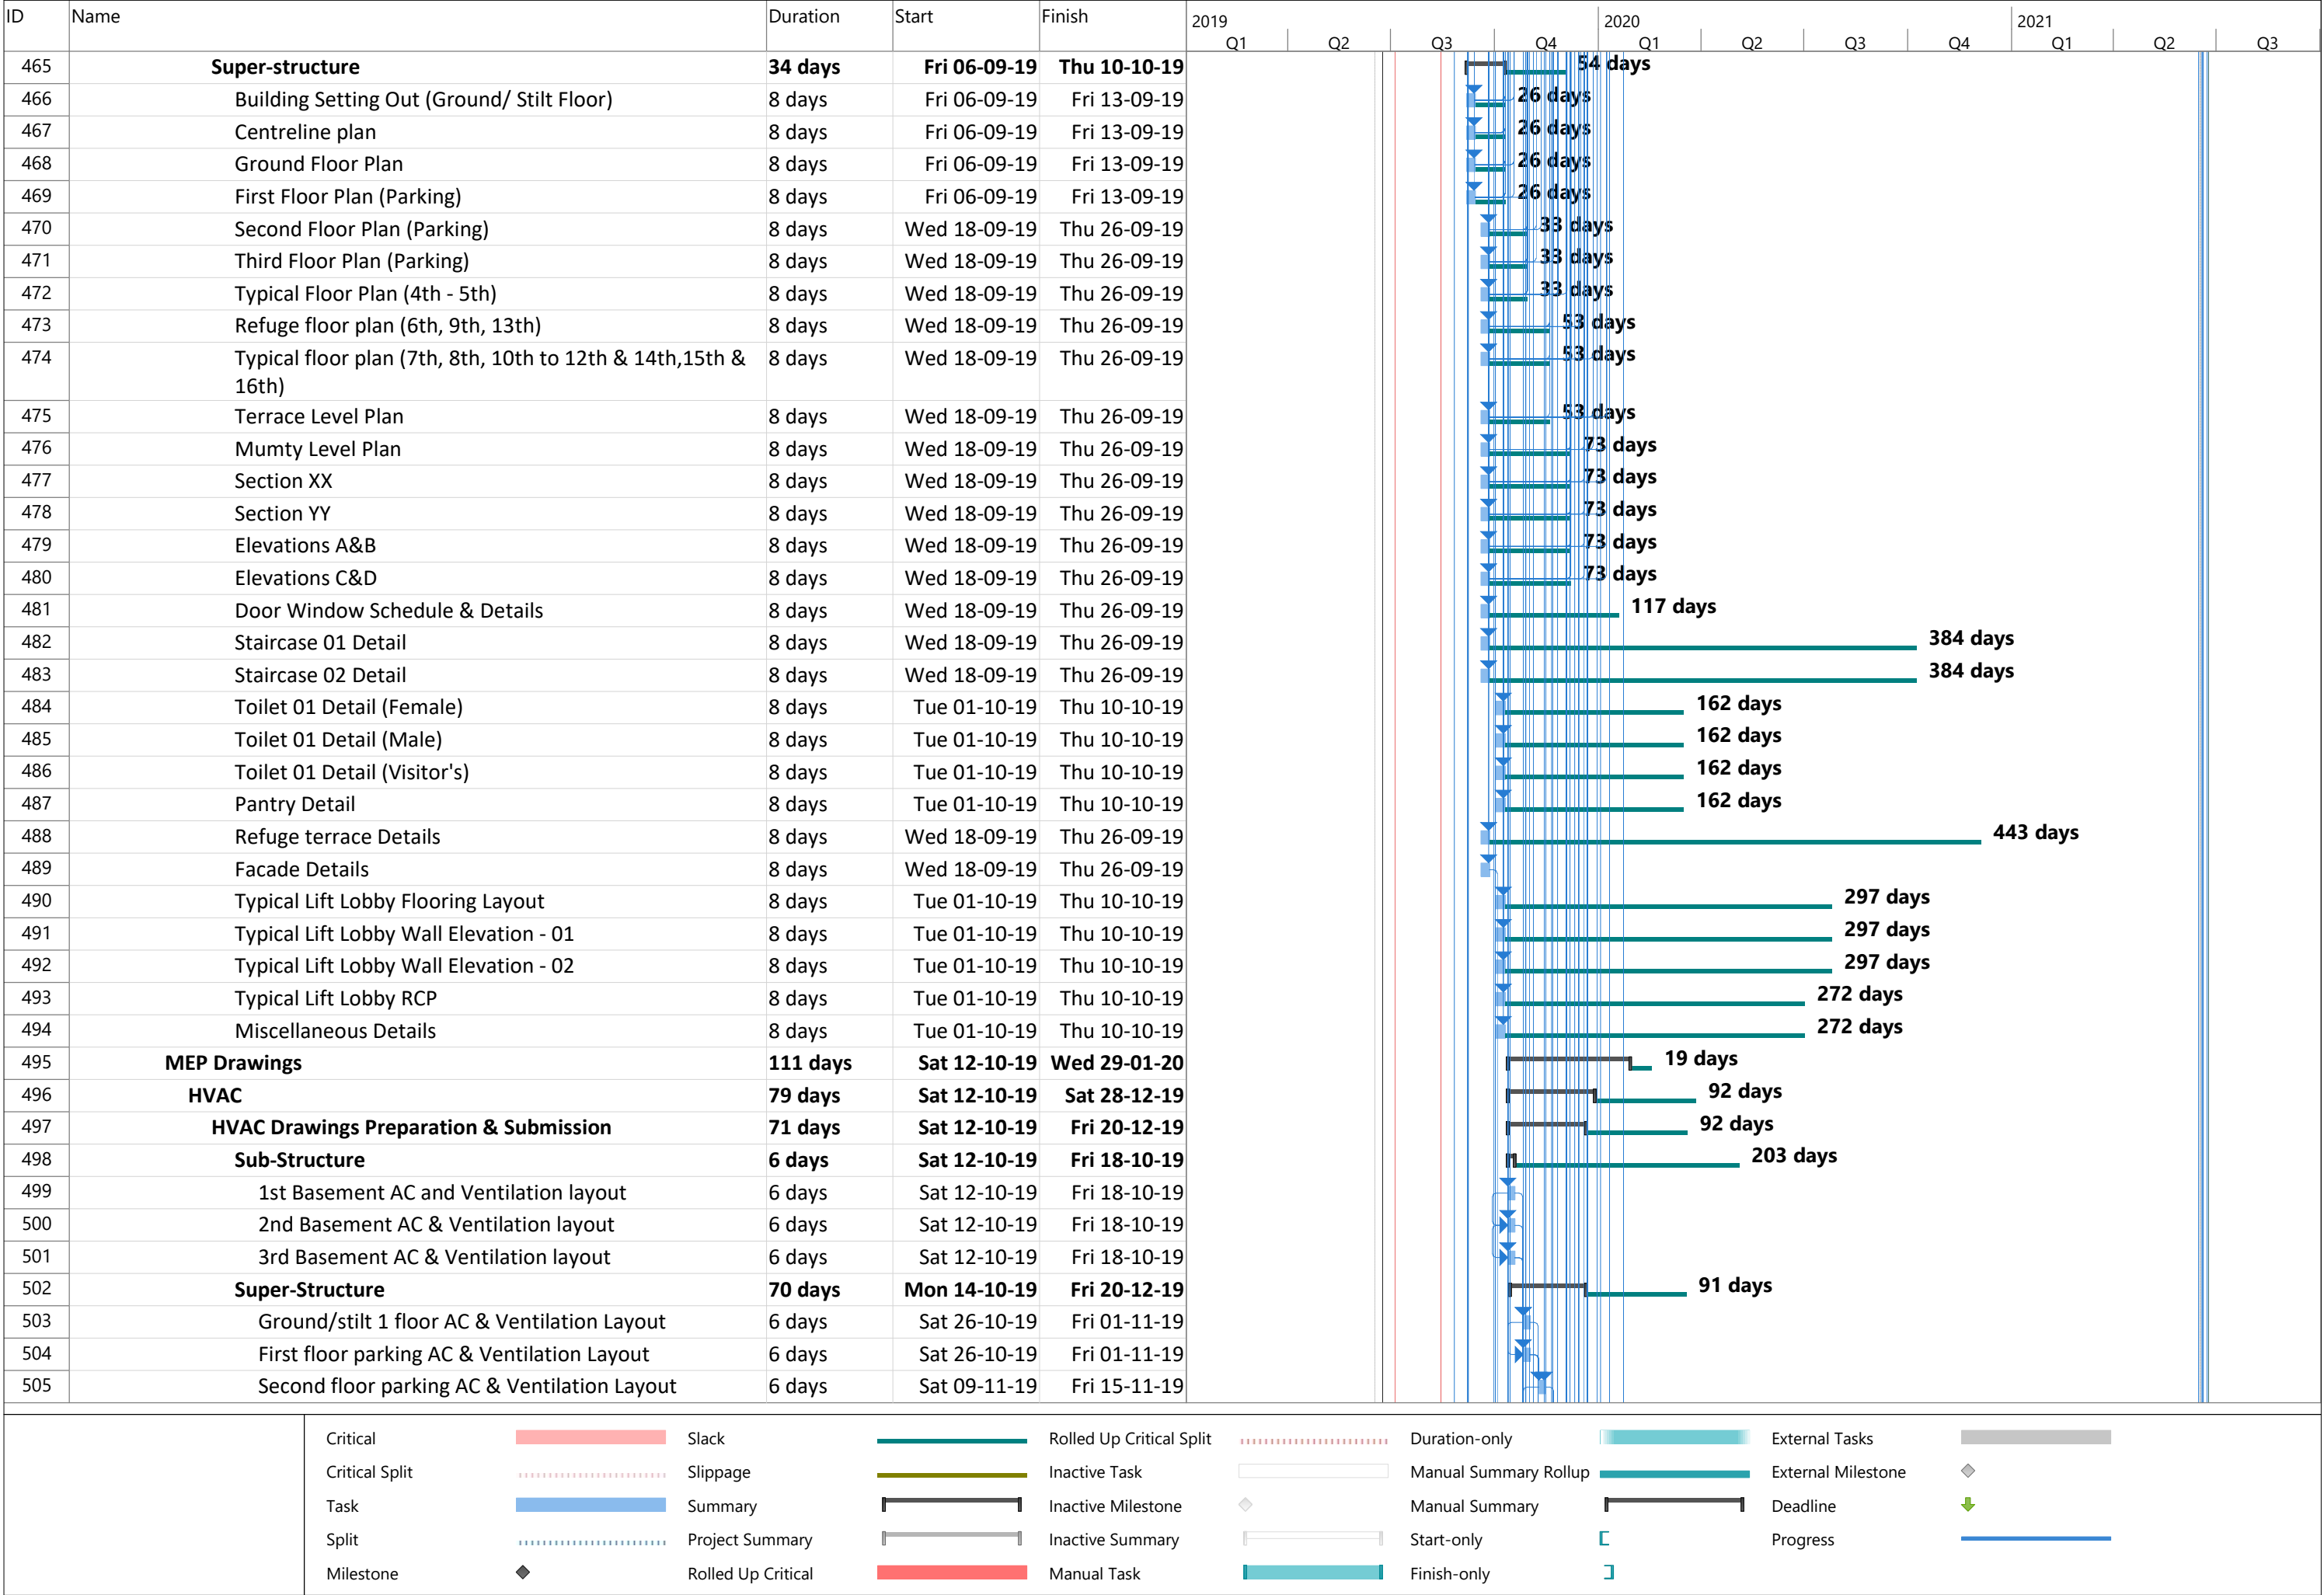

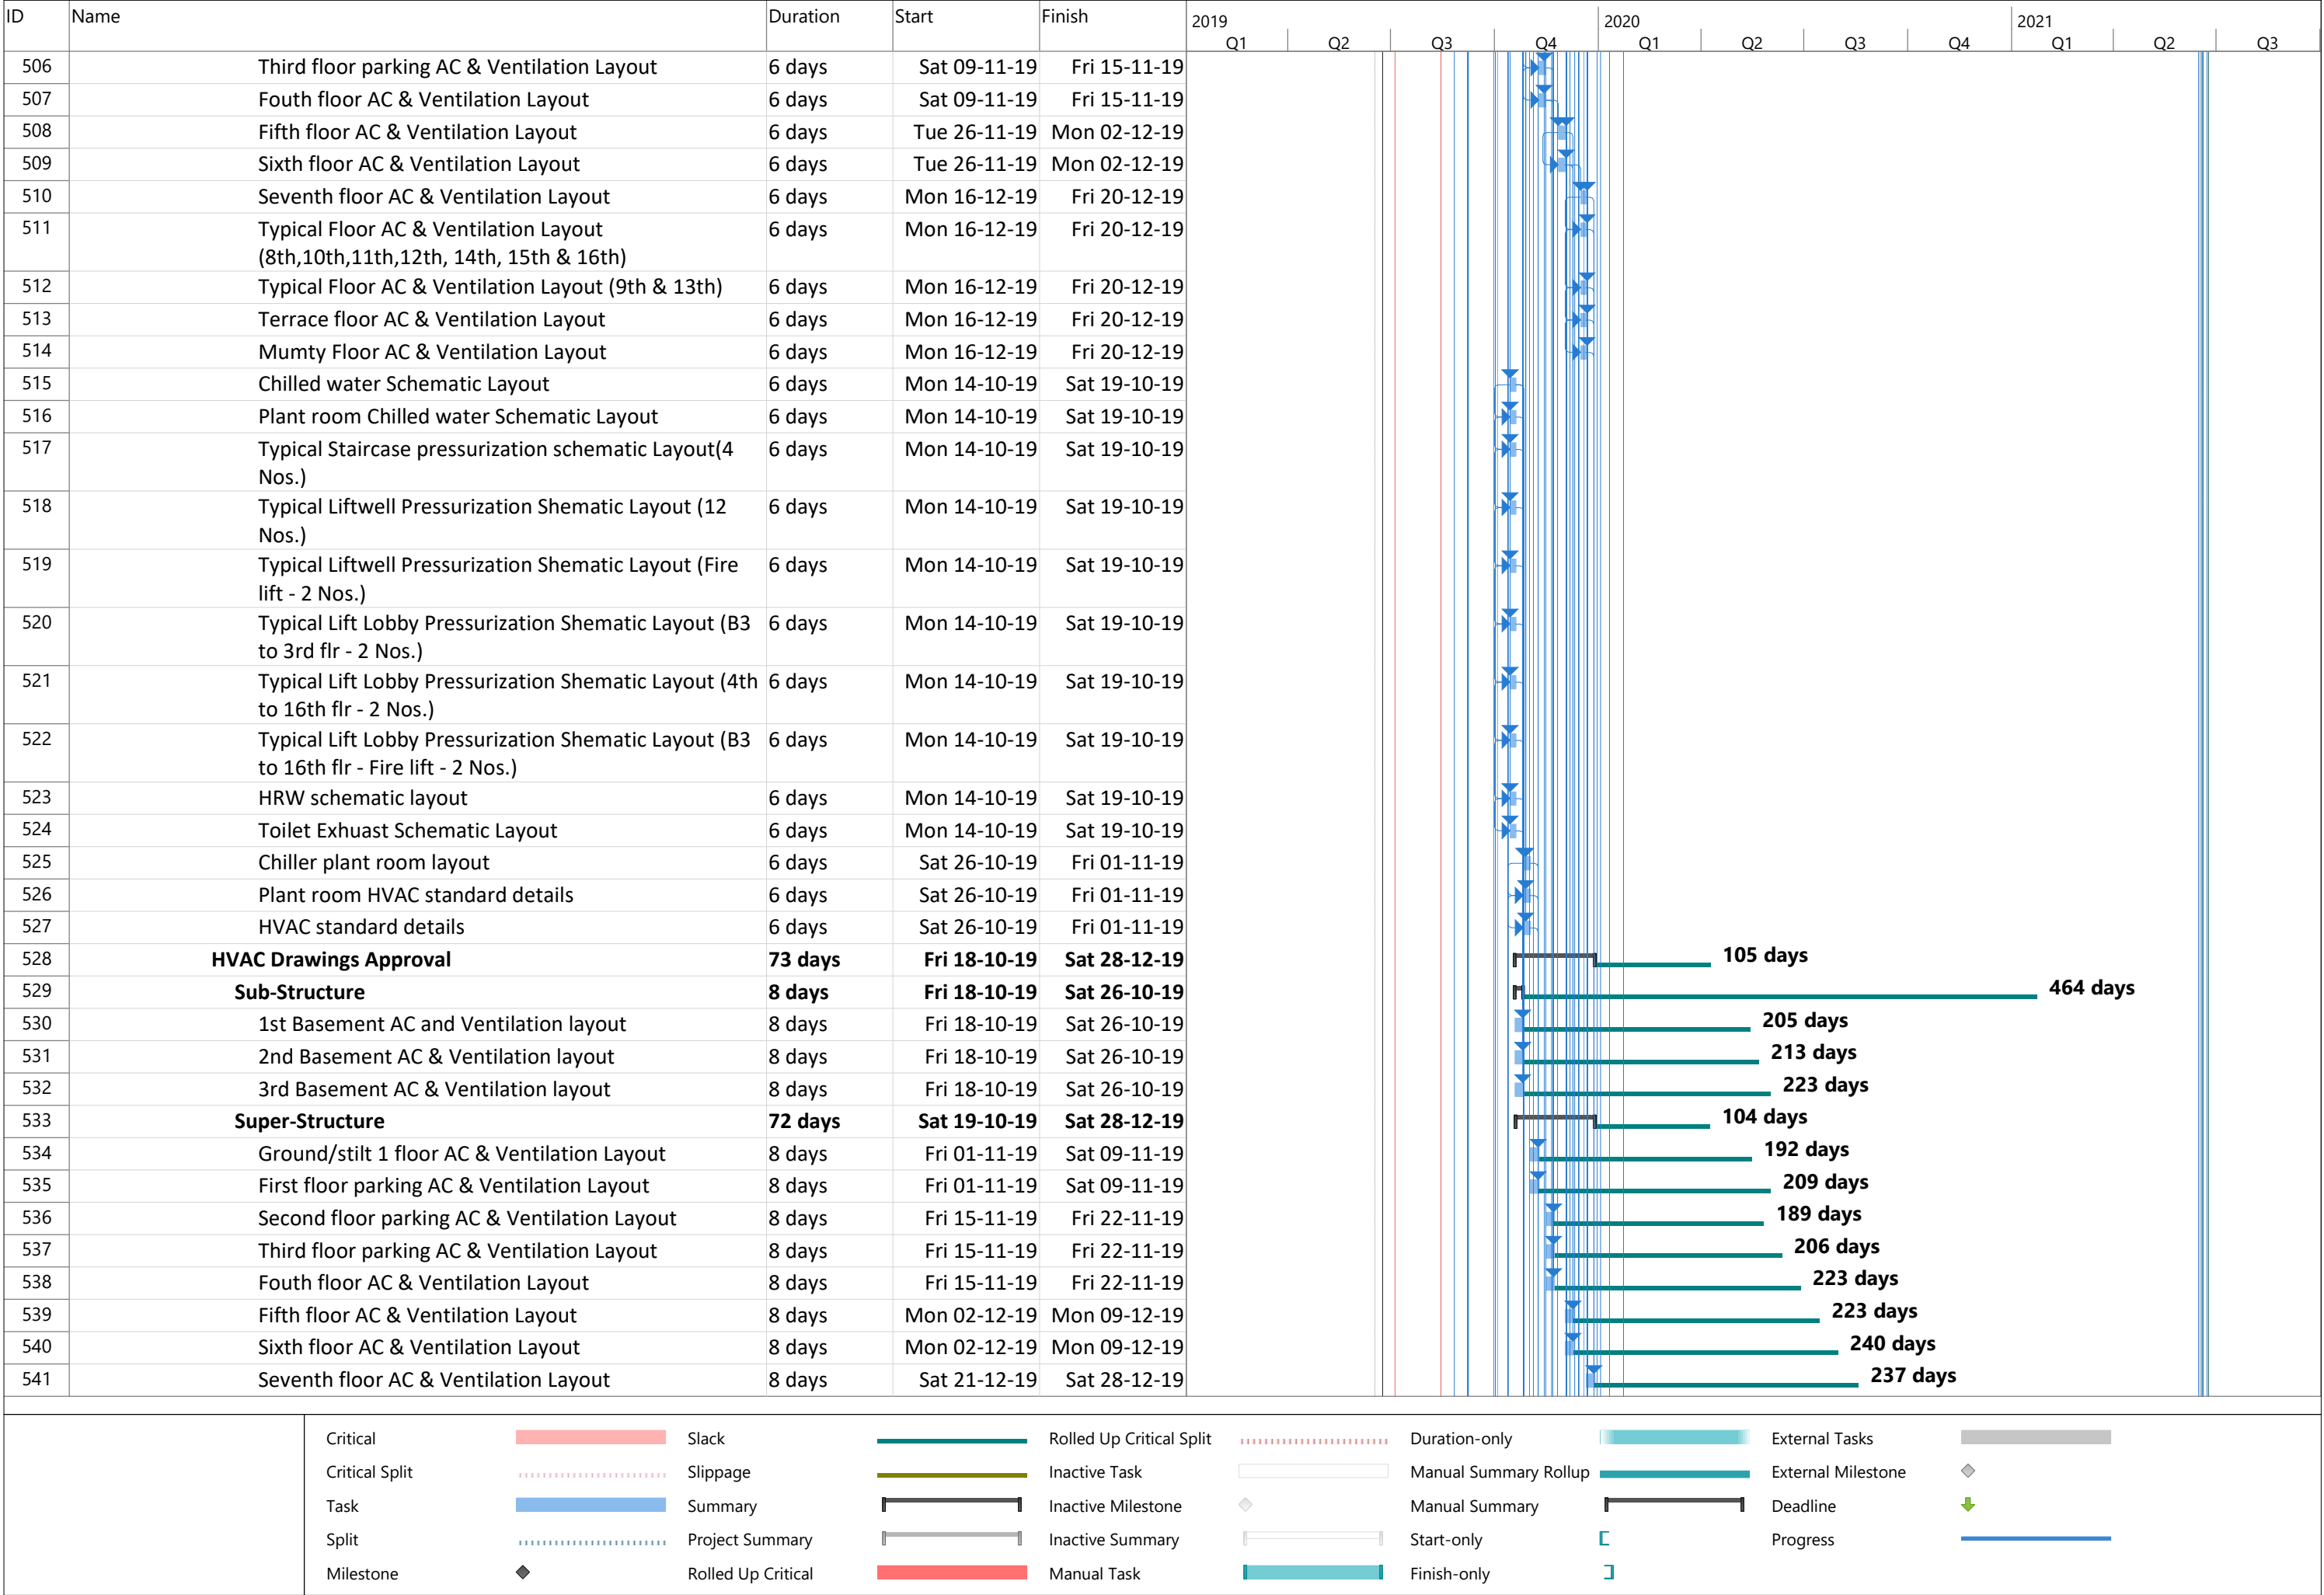

| ID  | Name                                                                                    | Duration | Start        | Finish       | 2019 |    |    |    | 2020 |    |    |    | 2021 |    |    |  |
|-----|-----------------------------------------------------------------------------------------|----------|--------------|--------------|------|----|----|----|------|----|----|----|------|----|----|--|
|     |                                                                                         |          |              |              | Q1   | Q2 | Q3 | Q4 | Q1   | Q2 | Q3 | Q4 | Q1   | Q2 | Q3 |  |
| 542 | Typical Floor AC & Ventilation Layout (8th,10th,11th,12th, 14th, 15th & 16th)           | 8 days   | Sat 21-12-19 | Sat 28-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 543 | Typical Floor AC & Ventilation Layout (9th & 13th)                                      | 8 days   | Sat 21-12-19 | Sat 28-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 544 | Terrace floor AC & Ventilation Layout                                                   | 8 days   | Sat 21-12-19 | Sat 28-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 545 | Mumty Floor AC & Ventilation Layout                                                     | 8 days   | Sat 21-12-19 | Sat 28-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 546 | Chilled water Schematic Layout                                                          | 8 days   | Sat 19-10-19 | Mon 28-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 547 | Plant room Chilled water Schematic Layout                                               | 8 days   | Sat 19-10-19 | Mon 28-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 548 | Typical Staircase pressurization schematic Layout(4 Nos.)                               | 8 days   | Sat 19-10-19 | Mon 28-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 549 | Typical Liftwell Pressurization Shematic Layout (12 Nos.)                               | 8 days   | Sat 19-10-19 | Mon 28-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 550 | Typical Liftwell Pressurization Shematic Layout (Fire lift - 2 Nos.)                    | 8 days   | Sat 19-10-19 | Mon 28-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 551 | Typical Lift Lobby Pressurization Shematic Layout (B3 to 3rd flr - 2 Nos.)              | 8 days   | Sat 19-10-19 | Mon 28-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 552 | Typical Lift Lobby Pressurization Shematic Layout (4th to 16th flr - 2 Nos.)            | 8 days   | Sat 19-10-19 | Mon 28-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 553 | Typical Lift Lobby Pressurization Shematic Layout (B3 to 16th flr - Fire lift - 2 Nos.) | 8 days   | Sat 19-10-19 | Mon 28-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 554 | HRW schematic layout                                                                    | 8 days   | Sat 19-10-19 | Mon 28-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 555 | Toilet Exhuast Schematic Layout                                                         | 8 days   | Sat 19-10-19 | Mon 28-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 556 | Chiller plant room layout                                                               | 8 days   | Fri 01-11-19 | Sat 09-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 557 | Plant room HVAC standard details                                                        | 8 days   | Fri 01-11-19 | Sat 09-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 558 | HVAC standard details                                                                   | 8 days   | Fri 01-11-19 | Sat 09-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 559 | ELECTRICAL                                                                              | 111 days | Sat 12-10-19 | Wed 29-01-20 |      |    |    |    |      |    |    |    |      |    |    |  |
| 560 | ELECTRICAL Drawings Preparation & Submission                                            | 103 days | Sat 12-10-19 | Tue 21-01-20 |      |    |    |    |      |    |    |    |      |    |    |  |
| 561 | Sub-Structure                                                                           | 40 days  | Sat 12-10-19 | Thu 21-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 562 | BASEMENT-3 FLOOR LIGHTING & POWER LAYOUT WITH DB                                        | 6 days   | Sat 12-10-19 | Fri 18-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 563 | BASEMENT-2 FLOOR LIGHTING & POWER LAYOUT WITH DB                                        | 6 days   | Sat 12-10-19 | Fri 18-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 564 | BASEMENT-1 FLOOR LIGHTING & POWER LAYOUT WITH DB                                        | 6 days   | Sat 12-10-19 | Fri 18-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 565 | BASEMENT-3 FLOOR CABLE TRAY LAYOUT                                                      | 6 days   | Sat 12-10-19 | Fri 18-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 566 | BASEMENT-2 FLOOR CABLE TRAY LAYOUT                                                      | 6 days   | Sat 12-10-19 | Fri 18-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 567 | BASEMENT-1 FLOOR CABLE TRAY LAYOUT                                                      | 6 days   | Sat 12-10-19 | Fri 18-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 568 | STP ROOM ELECTRICAL LAYOUT                                                              | 6 days   | Fri 15-11-19 | Thu 21-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 569 | UGT PUMP ROOM ELECTRICAL LAYOUT                                                         | 6 days   | Fri 15-11-19 | Thu 21-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 570 | RAMP LIGHTING LAYOUT                                                                    | 6 days   | Fri 15-11-19 | Thu 21-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 571 | Super-Structure                                                                         | 81 days  | Mon 04-11-19 | Tue 21-01-20 |      |    |    |    |      |    |    |    |      |    |    |  |
| 572 | Ground Floor LIGHTING & POWER LAYOUT WITH DB                                            | 6 days   | Mon 04-11-19 | Sat 09-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 573 | First Floor Plan (Parking) LIGHTING & POWER LAYOUT WITH DB                              | 6 days   | Mon 04-11-19 | Sat 09-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |

Critical

Critical Split

Task

Split

Milestone

Slack

Slippage

Summary

Project Summary

Rolled Up Critical

Rolled Up Critical Split

Inactive Task

Inactive Milestone

Inactive Summary

Manual Task

Duration-only

Manual Summary Rollup

Manual Summary

Start-only

Finish-only

External Tasks


External Milestone


Deadline


Progress


| ID  | Name |                                                                                                | Duration | Start              | Finish       | 2019                     |    |    |                       | 2020 |                    |    |    | 2021 |    |    |  |
|-----|------|------------------------------------------------------------------------------------------------|----------|--------------------|--------------|--------------------------|----|----|-----------------------|------|--------------------|----|----|------|----|----|--|
|     |      |                                                                                                |          |                    |              | Q1                       | Q2 | Q3 | Q4                    | Q1   | Q2                 | Q3 | Q4 | Q1   | Q2 | Q3 |  |
| 574 |      | Second Floor Plan (Parking) LIGHTING & POWER LAYOUT WITH DB                                    | 6 days   | Sat 16-11-19       | Fri 22-11-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 575 |      | Third Floor Plan (Parking) LIGHTING & POWER LAYOUT WITH DB                                     | 6 days   | Sat 16-11-19       | Fri 22-11-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 576 |      | Typical Floor Plan (4th - 5th) LIGHTING & POWER LAYOUT WITH DB                                 | 6 days   | Wed 04-12-19       | Mon 09-12-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 577 |      | Refuge floor plan (6th, 9th, 13th) LIGHTING & POWER LAYOUT WITH DB                             | 6 days   | Mon 16-12-19       | Fri 20-12-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 578 |      | Typical floor plan (7th, 8th, 10th to 12th & 14th,15th & 16th) LIGHTING & POWER LAYOUT WITH DB | 6 days   | Mon 16-12-19       | Fri 20-12-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 579 |      | Terrace Level Plan LIGHTING & POWER LAYOUT WITH DB                                             | 6 days   | Fri 27-12-19       | Wed 01-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 580 |      | Ground Floor CABLE TRAY LAYOUT                                                                 | 6 days   | Mon 04-11-19       | Sat 09-11-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 581 |      | First Floor Plan (Parking) CABLE TRAY LAYOUT                                                   | 6 days   | Sat 09-11-19       | Fri 15-11-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 582 |      | Second Floor Plan (Parking) CABLE TRAY LAYOUT                                                  | 6 days   | Mon 18-11-19       | Sat 23-11-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 583 |      | Third Floor Plan (Parking) CABLE TRAY LAYOUT                                                   | 6 days   | Fri 29-11-19       | Thu 05-12-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 584 |      | Typical Floor Plan (4th - 5th) CABLE TRAY LAYOUT                                               | 6 days   | Wed 11-12-19       | Tue 17-12-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 585 |      | Refuge floor plan (6th, 9th, 13th) CABLE TRAY LAYOUT                                           | 6 days   | Mon 23-12-19       | Sat 28-12-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 586 |      | Typical floor plan (7th, 8th, 10th to 12th & 14th,15th & 16th) CABLE TRAY LAYOUT               | 6 days   | Fri 03-01-20       | Thu 09-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 587 |      | Terrace Level Plan CABLE TRAY & SOLAR LOCATION LAYOUT                                          | 6 days   | Wed 15-01-20       | Tue 21-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 588 |      | Mumty Level Plan LIGHTING & POWER LAYOUT WITH DB                                               | 6 days   | Wed 15-01-20       | Tue 21-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 589 |      | LIGHTNING PROTECTION LAYOUT                                                                    | 6 days   | Wed 15-01-20       | Tue 21-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 590 |      | LT SCHEMATIC LAYOUT                                                                            | 6 days   | Wed 15-01-20       | Tue 21-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 591 |      | MAIN LT PANEL & DG SCHEMATIC LAYOUT                                                            | 6 days   | Wed 15-01-20       | Tue 21-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 592 |      | HT SCHEMATIC LAYOUT                                                                            | 6 days   | Wed 15-01-20       | Tue 21-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 593 |      | BUSRISER SHAFT-1 ELECTRICAL ELEVATION LAYOUT                                                   | 6 days   | Wed 15-01-20       | Tue 21-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 594 |      | BUSRISER SHAFT-2 ELECTRICAL ELEVATION LAYOUT                                                   | 6 days   | Wed 15-01-20       | Tue 21-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 595 |      | Staircase Detail 1 LIGHTING LAYOUT                                                             | 6 days   | Wed 15-01-20       | Tue 21-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 596 |      | Staircase Detail 2 LIGHTING LAYOUT                                                             | 6 days   | Wed 15-01-20       | Tue 21-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 597 |      | Refuge terrace Details LIGHTING LAYOUT WITH DB                                                 | 6 days   | Wed 15-01-20       | Tue 21-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 598 |      | ELECTRICAL Drawings Approval                                                                   | 105 days | Fri 18-10-19       | Wed 29-01-20 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 599 |      | Sub-Structure                                                                                  | 42 days  | Fri 18-10-19       | Thu 28-11-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
| 600 |      | BASEMENT-3 FLOOR LIGHTING & POWER LAYOUT WITH DB                                               | 8 days   | Fri 18-10-19       | Sat 26-10-19 |                          |    |    |                       |      |                    |    |    |      |    |    |  |
|     |      |                                                                                                |          |                    |              |                          |    |    |                       |      |                    |    |    |      |    |    |  |
|     |      | Critical                                                                                       |          | Slack              |              | Rolled Up Critical Split |    |    | Duration-only         |      | External Tasks     |    |    |      |    |    |  |
|     |      | Critical Split                                                                                 |          | Slippage           |              | Inactive Task            |    |    | Manual Summary Rollup |      | External Milestone |    |    |      |    |    |  |
|     |      | Task                                                                                           |          | Summary            |              | Inactive Milestone       |    |    | Manual Summary        |      | Deadline           |    |    |      |    |    |  |
|     |      | Split                                                                                          |          | Project Summary    |              | Inactive Summary         |    |    | Start-only            |      | Progress           |    |    |      |    |    |  |
|     |      | Milestone                                                                                      |          | Rolled Up Critical |              | Manual Task              |    |    | Finish-only           |      |                    |    |    |      |    |    |  |


| ID                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Name                                                                                           | Duration | Start        | Finish       | 2019 |    |    |    | 2020 |    |    |    | 2021 |    |    |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------|--------------|--------------|------|----|----|----|------|----|----|----|------|----|----|--|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                |          |              |              | Q1   | Q2 | Q3 | Q4 | Q1   | Q2 | Q3 | Q4 | Q1   | Q2 | Q3 |  |
| 601                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | BASEMENT-2 FLOOR LIGHTING & POWER LAYOUT WITH DB                                               | 8 days   | Fri 18-10-19 | Sat 26-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 602                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | BASEMENT-1 FLOOR LIGHTING & POWER LAYOUT WITH DB                                               | 8 days   | Fri 18-10-19 | Sat 26-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 603                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | BASEMENT-3 FLOOR CABLE TRAY LAYOUT                                                             | 8 days   | Fri 18-10-19 | Sat 26-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 604                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | BASEMENT-2 FLOOR CABLE TRAY LAYOUT                                                             | 8 days   | Fri 18-10-19 | Sat 26-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 605                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | BASEMENT-1 FLOOR CABLE TRAY LAYOUT                                                             | 8 days   | Fri 18-10-19 | Sat 26-10-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 606                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | STP ROOM ELECTRICAL LAYOUT                                                                     | 8 days   | Thu 21-11-19 | Thu 28-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 607                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | UGT PUMP ROOM ELECTRICAL LAYOUT                                                                | 8 days   | Thu 21-11-19 | Thu 28-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 608                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | RAMP LIGHTING LAYOUT                                                                           | 8 days   | Thu 21-11-19 | Thu 28-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 609                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Super-Structure                                                                                | 83 days  | Sat 09-11-19 | Wed 29-01-20 |      |    |    |    |      |    |    |    |      |    |    |  |
| 610                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Ground Floor LIGHTING & POWER LAYOUT WITH DB                                                   | 8 days   | Sat 09-11-19 | Sat 16-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 611                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | First Floor Plan (Parking) LIGHTING & POWER LAYOUT WITH DB                                     | 8 days   | Sat 09-11-19 | Sat 16-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 612                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Second Floor Plan (Parking) LIGHTING & POWER LAYOUT WITH DB                                    | 8 days   | Fri 22-11-19 | Sat 30-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 613                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Third Floor Plan (Parking) LIGHTING & POWER LAYOUT WITH DB                                     | 8 days   | Fri 22-11-19 | Sat 30-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 614                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Typical Floor Plan (4th - 5th) LIGHTING & POWER LAYOUT WITH DB                                 | 8 days   | Tue 10-12-19 | Tue 17-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 615                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Refuge floor plan (6th, 9th, 13th) LIGHTING & POWER LAYOUT WITH DB                             | 8 days   | Sat 21-12-19 | Sat 28-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 616                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Typical floor plan (7th, 8th, 10th to 12th & 14th,15th & 16th) LIGHTING & POWER LAYOUT WITH DB | 8 days   | Sat 21-12-19 | Sat 28-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 617                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Terrace Level Plan LIGHTING & POWER LAYOUT WITH DB                                             | 8 days   | Thu 02-01-20 | Thu 09-01-20 |      |    |    |    |      |    |    |    |      |    |    |  |
| 618                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Ground Floor CABLE TRAY LAYOUT                                                                 | 8 days   | Sat 09-11-19 | Sat 16-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 619                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | First Floor Plan (Parking) CABLE TRAY LAYOUT                                                   | 8 days   | Fri 15-11-19 | Fri 22-11-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 620                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Second Floor Plan (Parking) CABLE TRAY LAYOUT                                                  | 8 days   | Sat 23-11-19 | Mon 02-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 621                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Third Floor Plan (Parking) CABLE TRAY LAYOUT                                                   | 8 days   | Thu 05-12-19 | Fri 13-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 622                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Typical Floor Plan (4th - 5th) CABLE TRAY LAYOUT                                               | 8 days   | Tue 17-12-19 | Wed 25-12-19 |      |    |    |    |      |    |    |    |      |    |    |  |
| 623                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Refuge floor plan (6th, 9th, 13th) CABLE TRAY LAYOUT                                           | 8 days   | Sat 28-12-19 | Mon 06-01-20 |      |    |    |    |      |    |    |    |      |    |    |  |
| 624                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Typical floor plan (7th, 8th, 10th to 12th & 14th,15th & 16th) CABLE TRAY LAYOUT               | 8 days   | Thu 09-01-20 | Fri 17-01-20 |      |    |    |    |      |    |    |    |      |    |    |  |
| 625                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Terrace Level Plan CABLE TRAY & SOLAR LOCATION LAYOUT                                          | 8 days   | Tue 21-01-20 | Wed 29-01-20 |      |    |    |    |      |    |    |    |      |    |    |  |
| 626                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Mumty Level Plan LIGHTING & POWER LAYOUT WITH DB                                               | 8 days   | Tue 21-01-20 | Wed 29-01-20 |      |    |    |    |      |    |    |    |      |    |    |  |
| 627                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | LIGHTNING PROTECTION LAYOUT                                                                    | 8 days   | Tue 21-01-20 | Wed 29-01-20 |      |    |    |    |      |    |    |    |      |    |    |  |
| 628                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | LT SCHEMATIC LAYOUT                                                                            | 8 days   | Tue 21-01-20 | Wed 29-01-20 |      |    |    |    |      |    |    |    |      |    |    |  |
| <div><div><div><div>Critical</div><div>Critical Split</div><div>Task</div><div>Split</div><div>Milestone</div></div><div><div></div><div></div><div></div><div></div><div></div></div><div><div>Slack</div><div>Slippage</div><div>Summary</div><div>Project Summary</div><div>Rolled Up Critical</div></div></div><div><div></div><div></div><div></div><div></div><div></div></div><div><div>Rolled Up Critical Split</div><div>Inactive Task</div><div>Inactive Milestone</div><div>Inactive Summary</div><div>Manual Task</div></div><div><div></div><div></div><div></div><div></div><div></div></div><div><div>Duration-only</div><div>Manual Summary Rollup</div><div>Manual Summary</div><div>Start-only</div><div>Finish-only</div></div><div><div></div><div></div><div></div><div></div><div></div></div><div><div>External Tasks</div><div>External Milestone</div><div>Deadline</div><div>Progress</div><div></div></div><div><div></div><div></div><div></div><div></div><div></div></div></div> |                                                                                                |          |              |              |      |    |    |    |      |    |    |    |      |    |    |  |

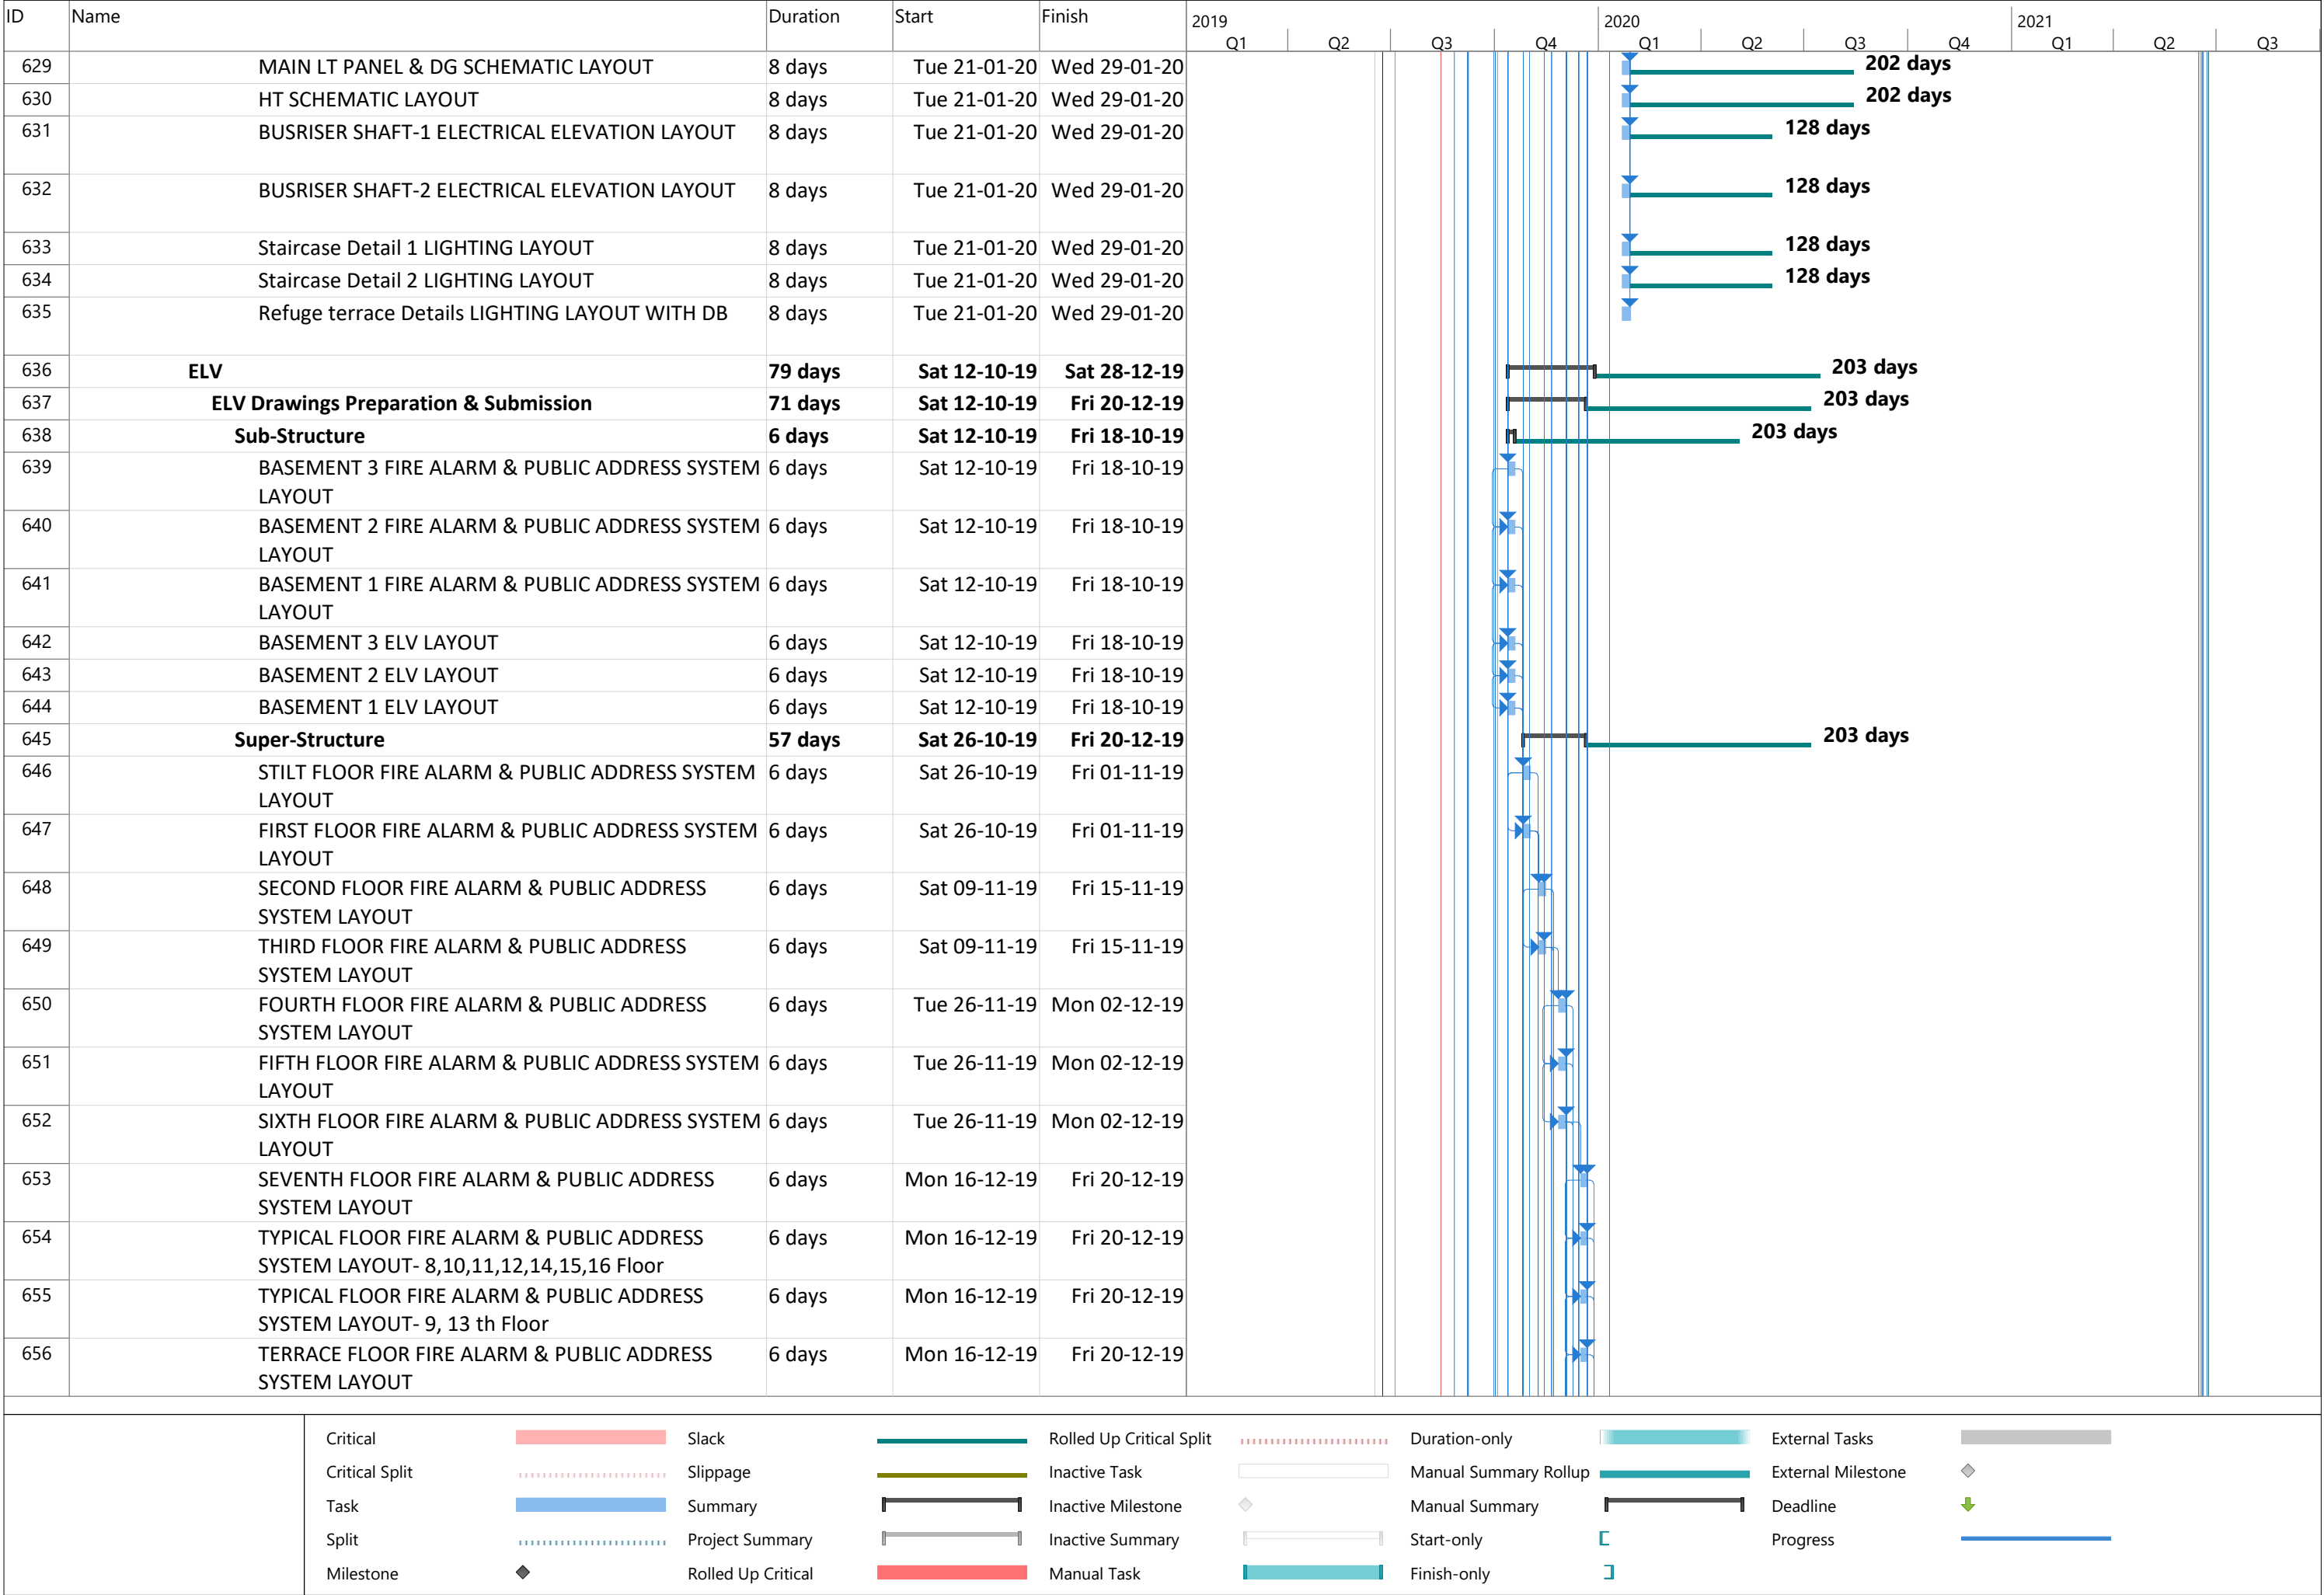


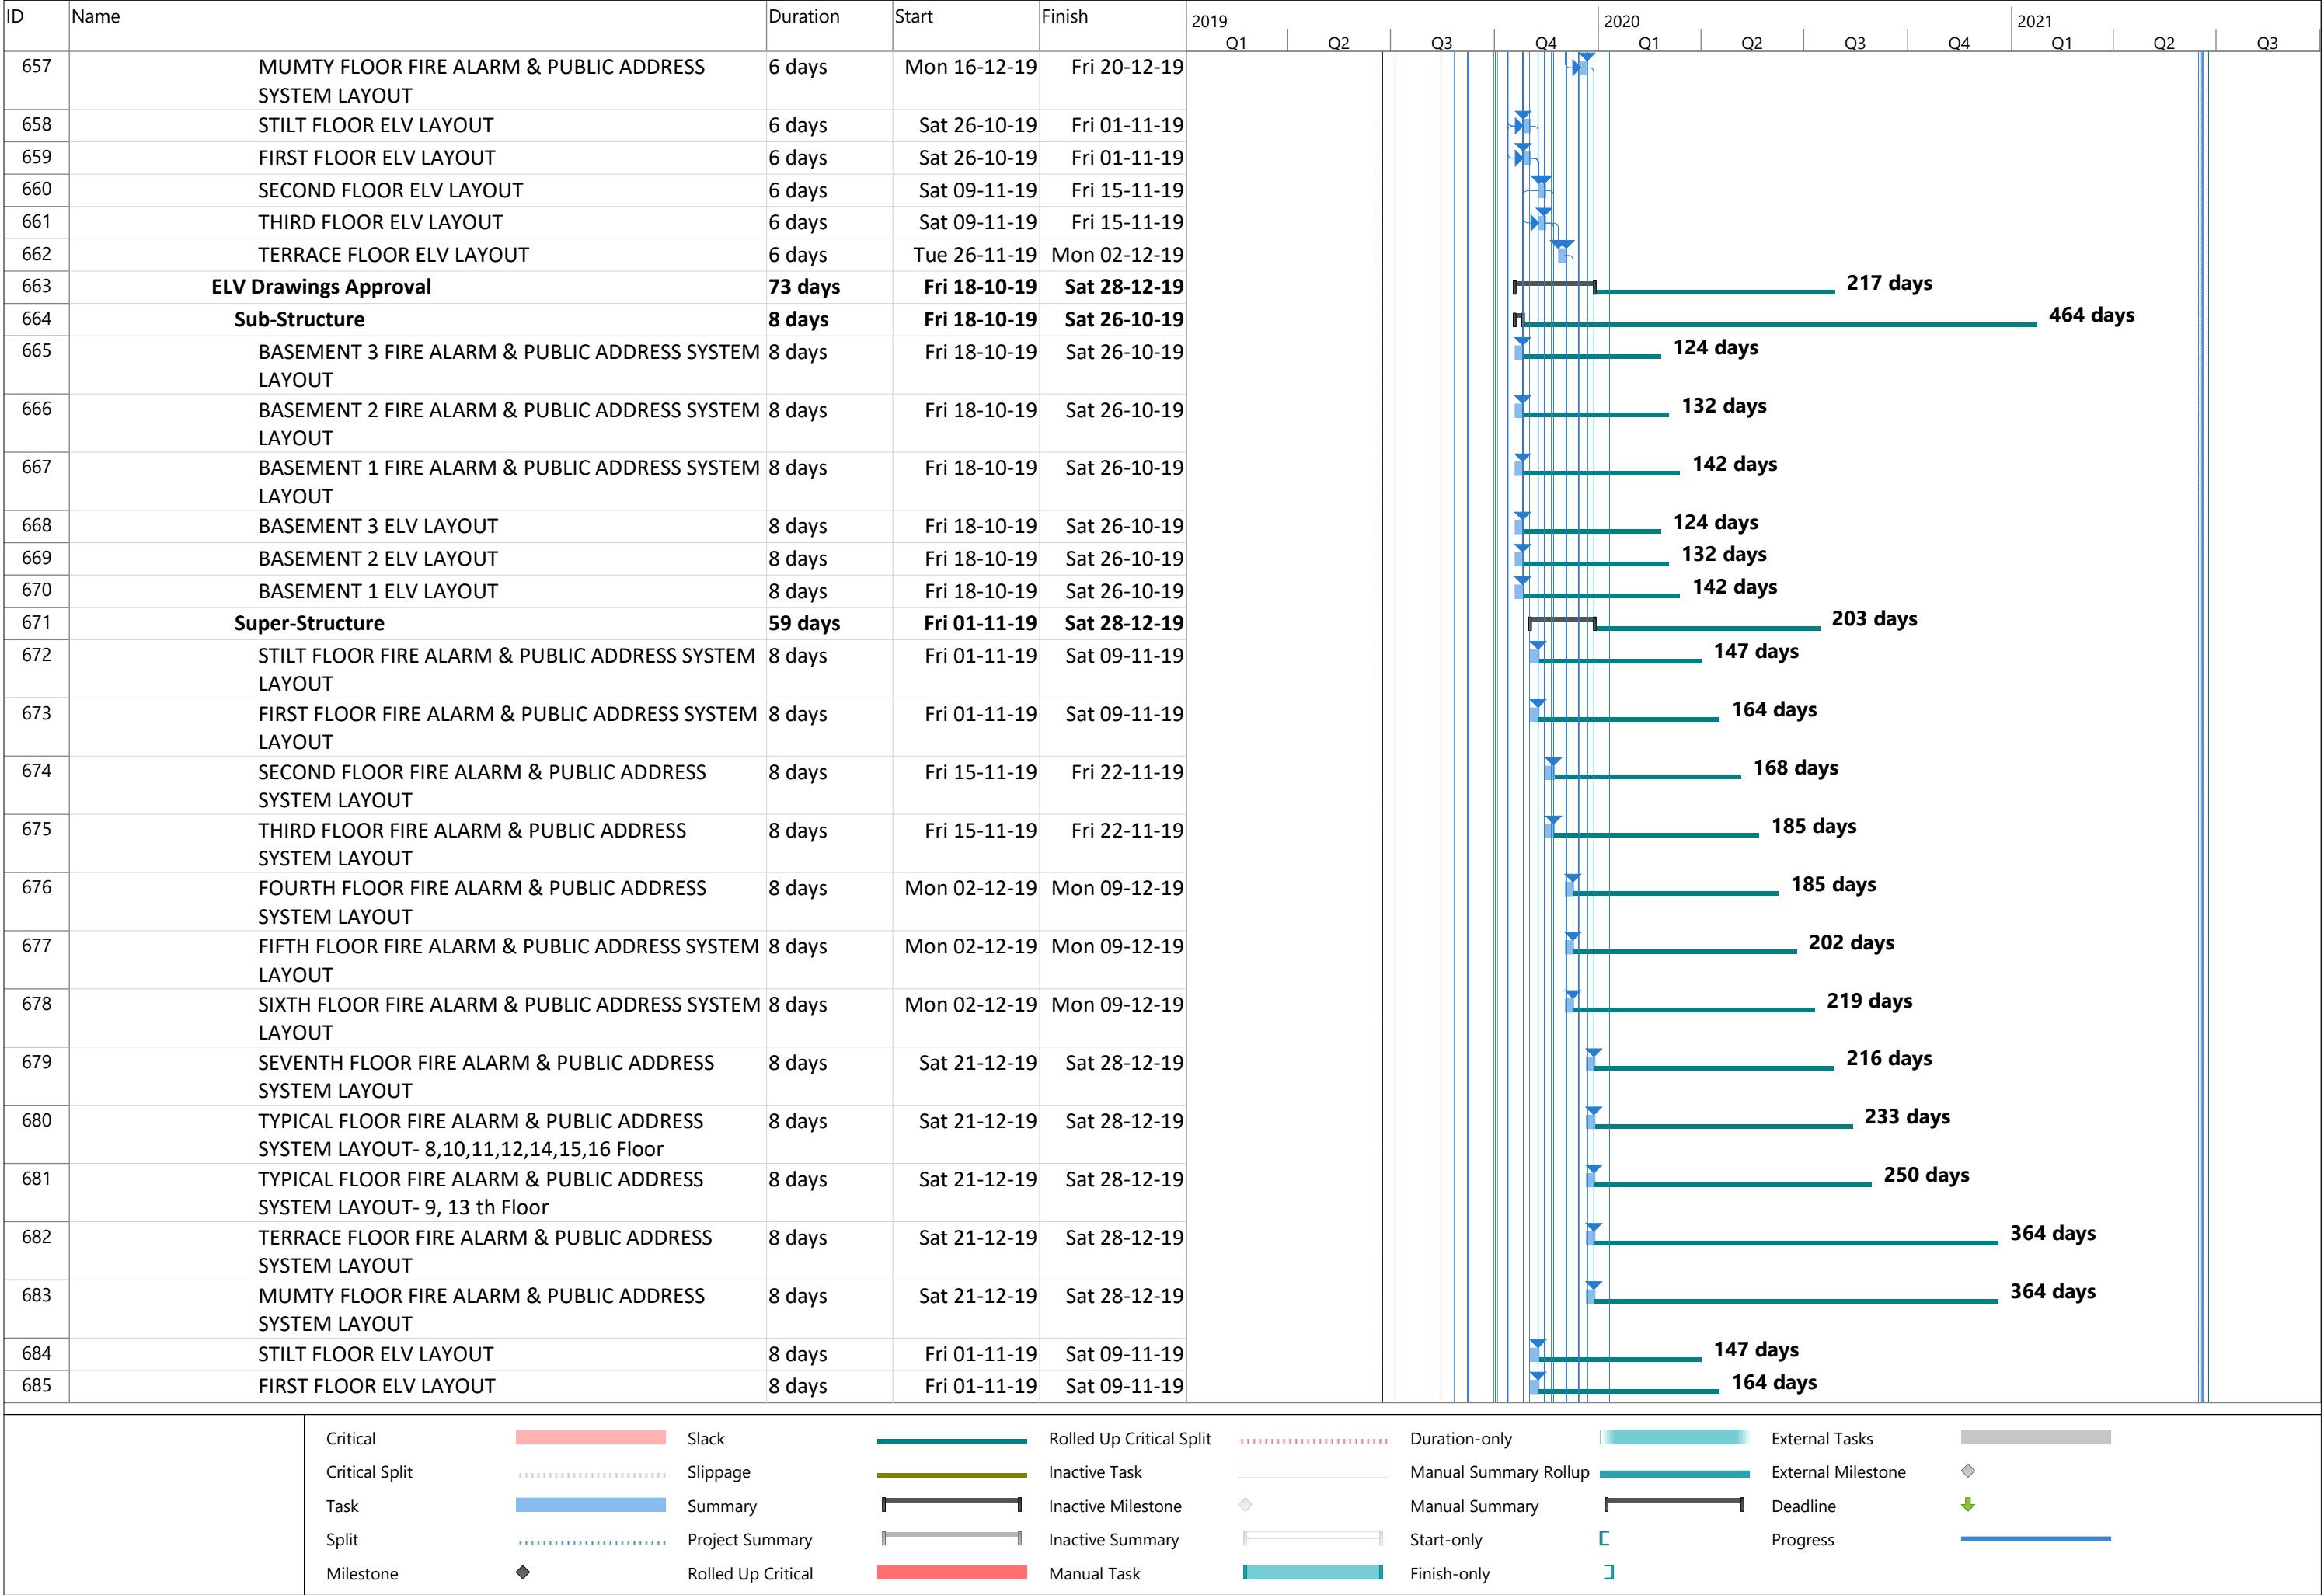


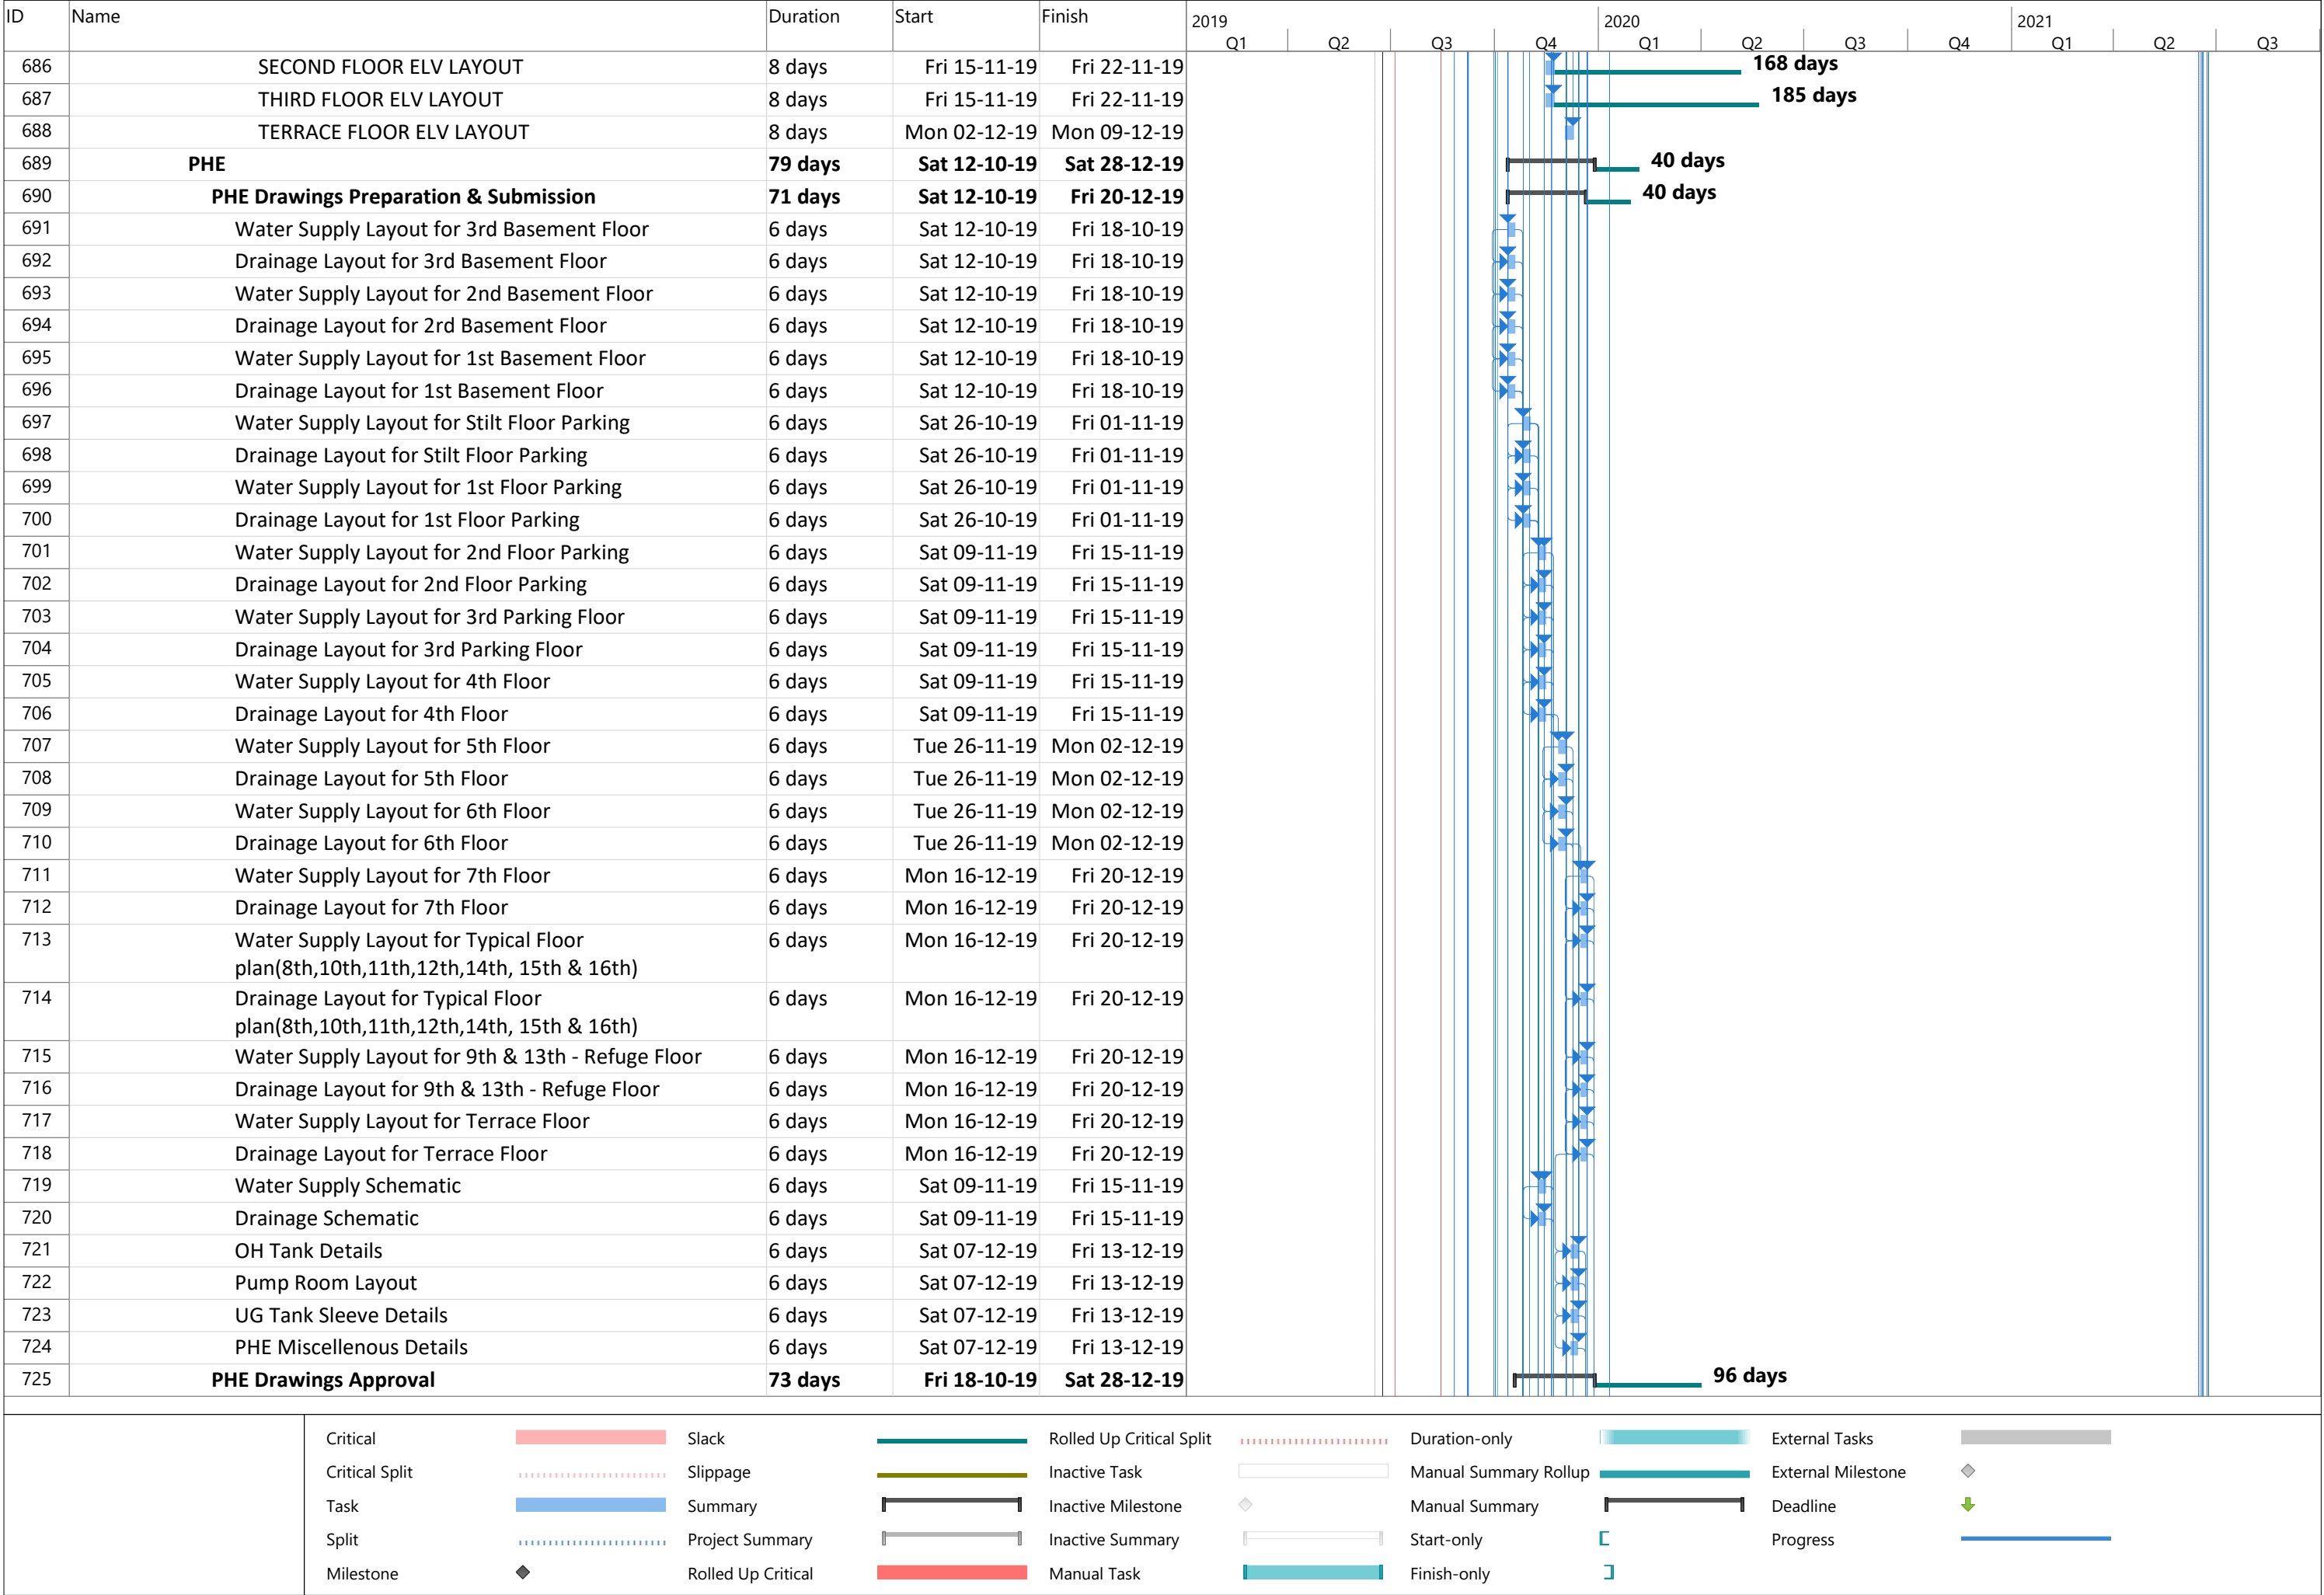

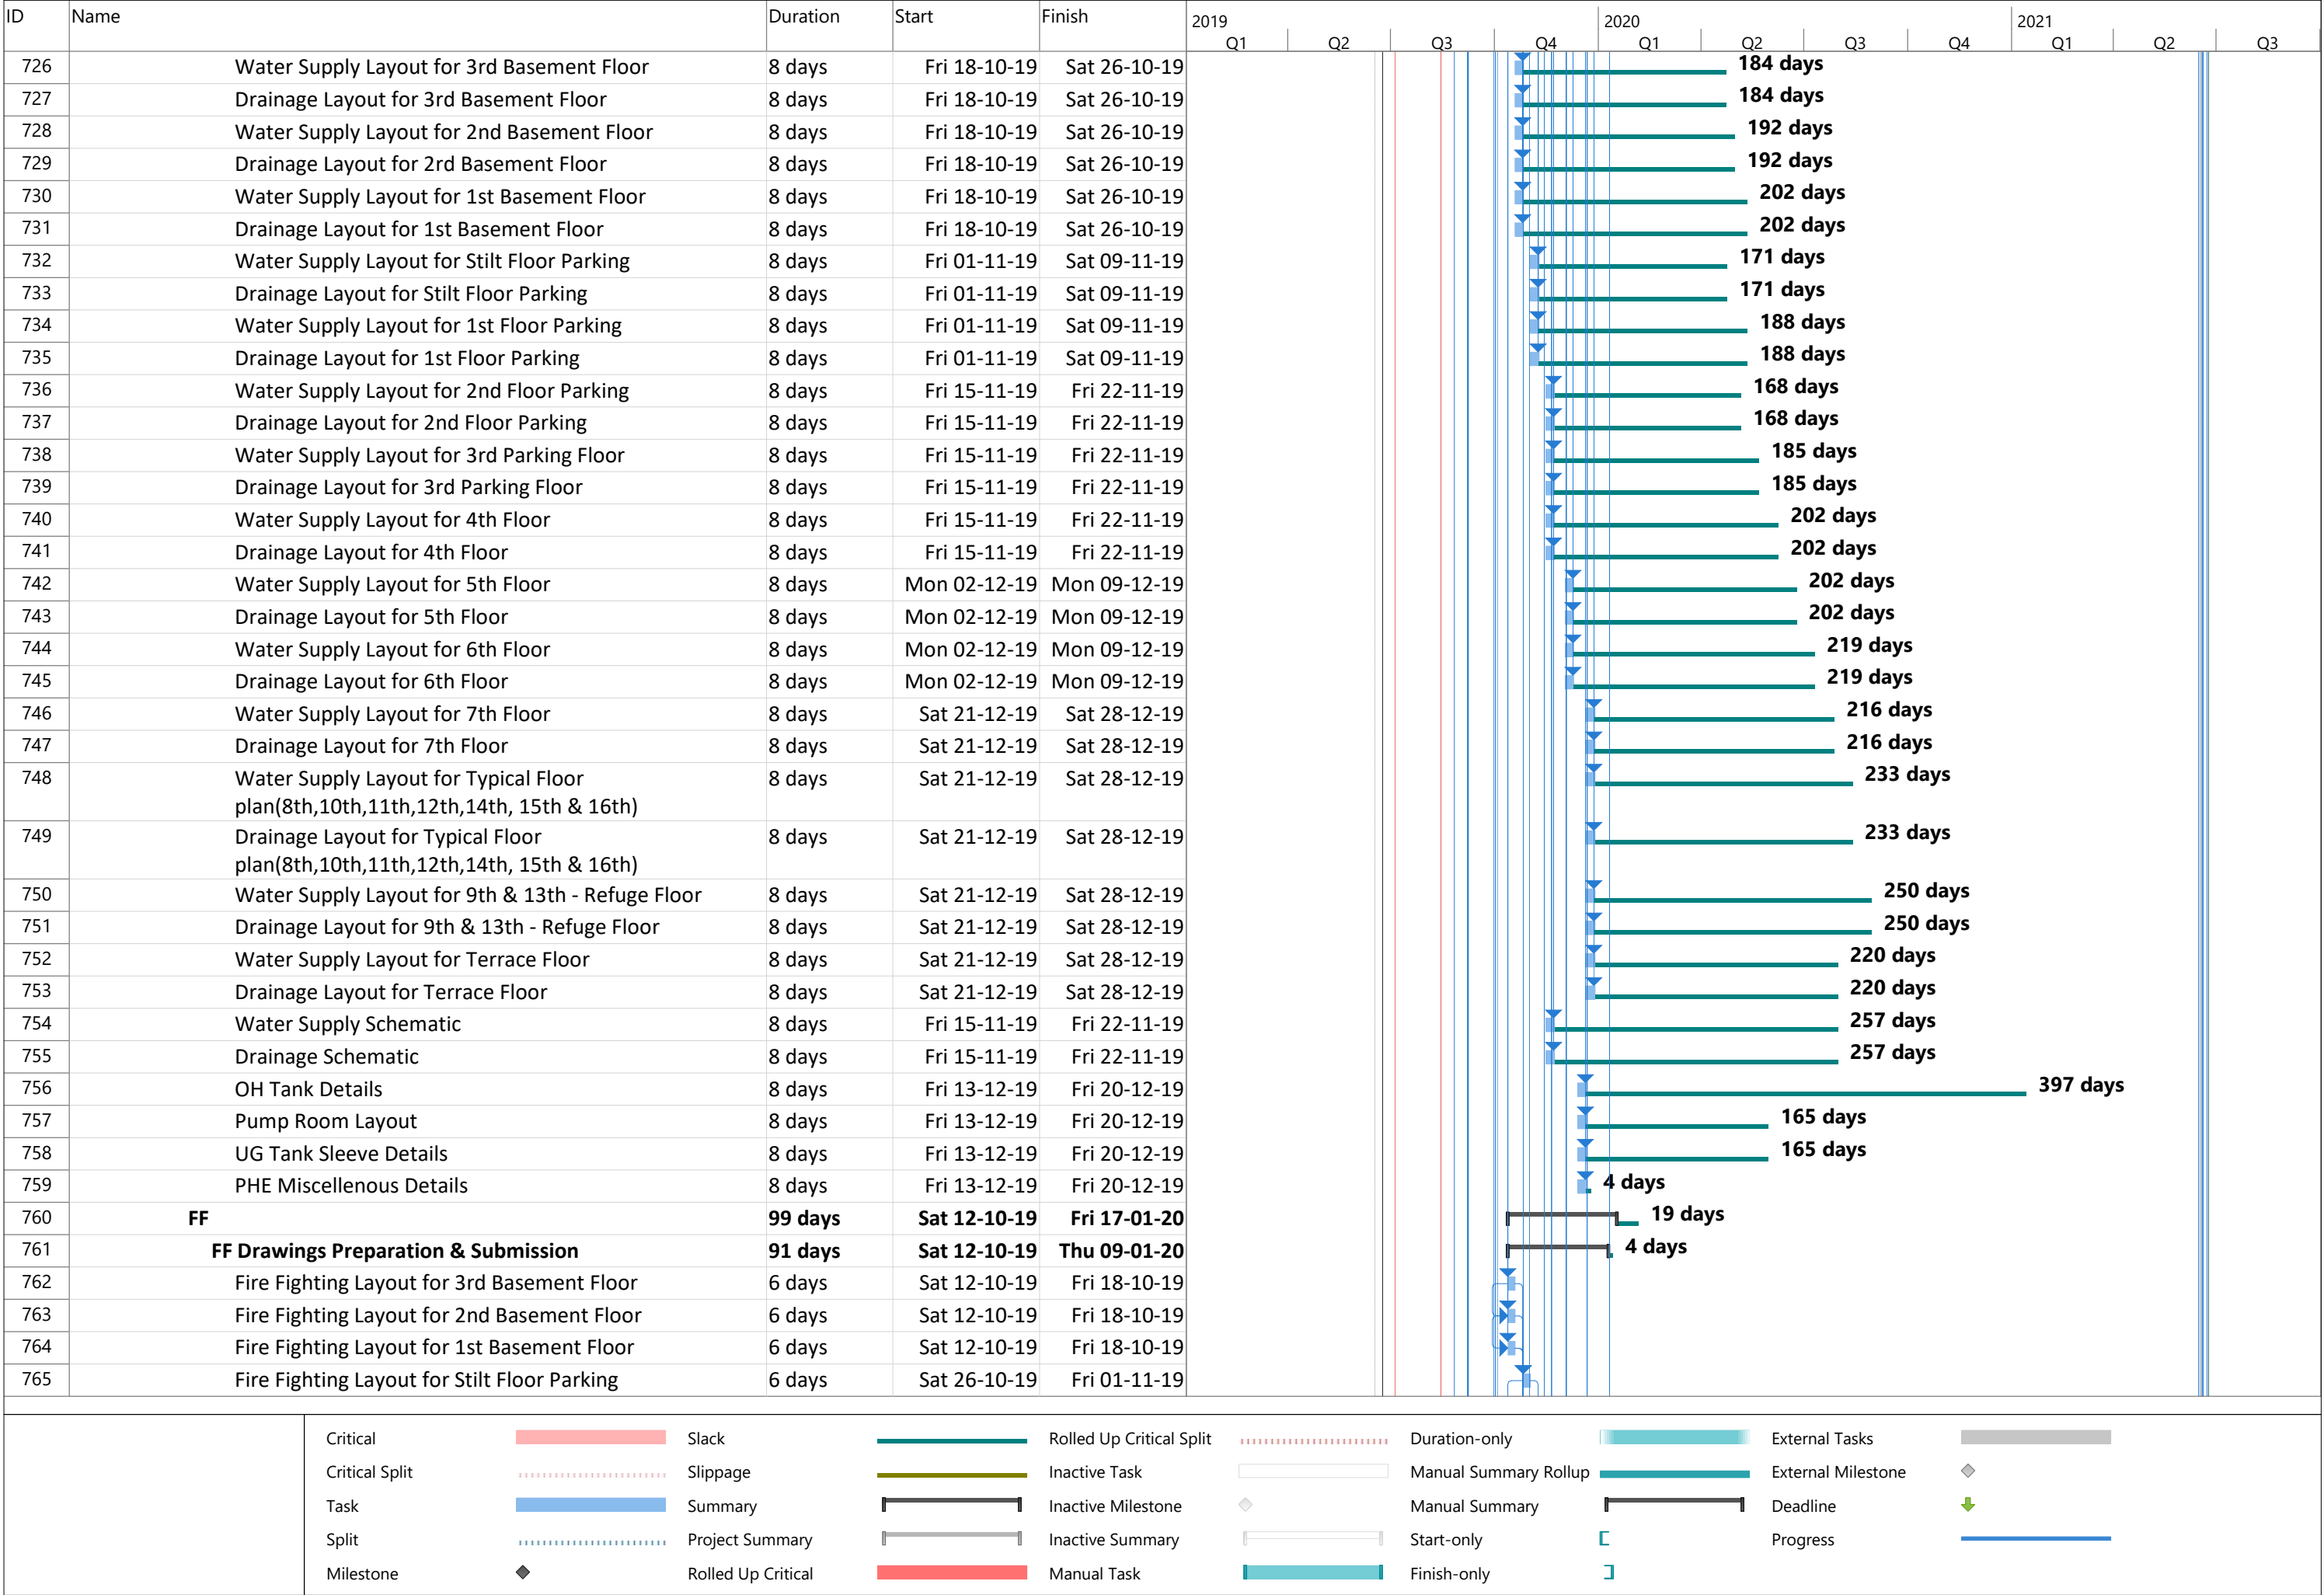

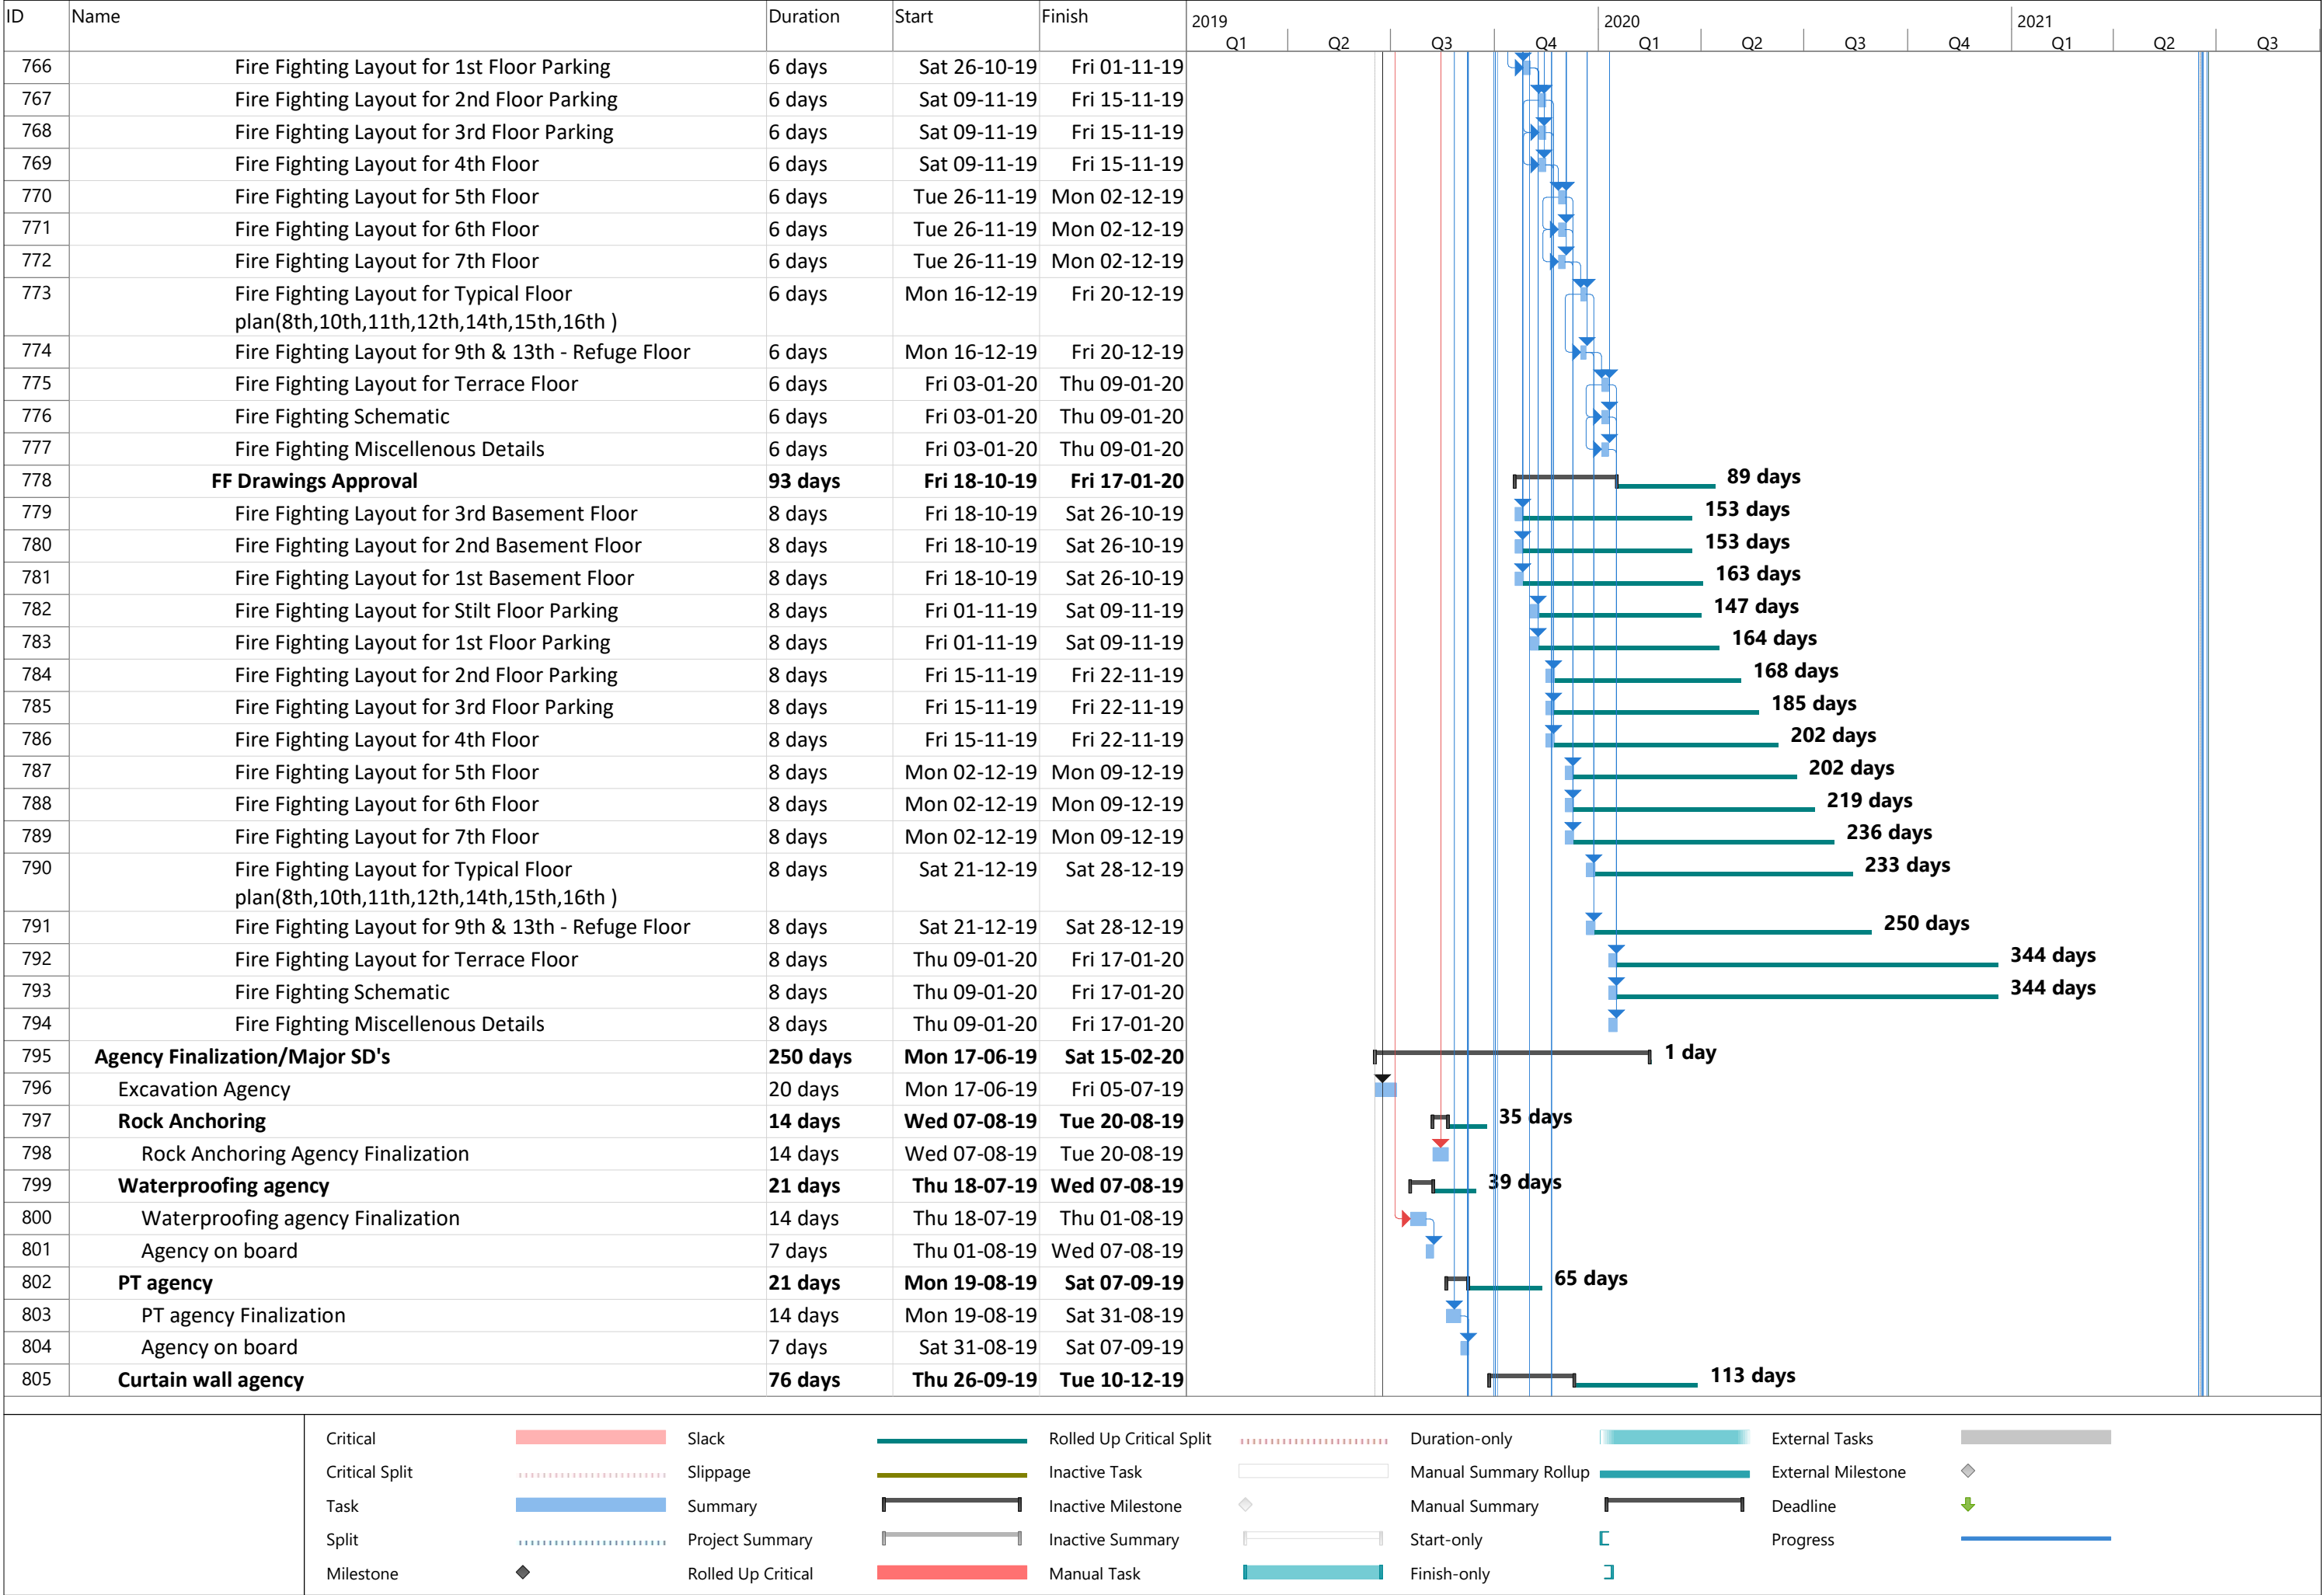

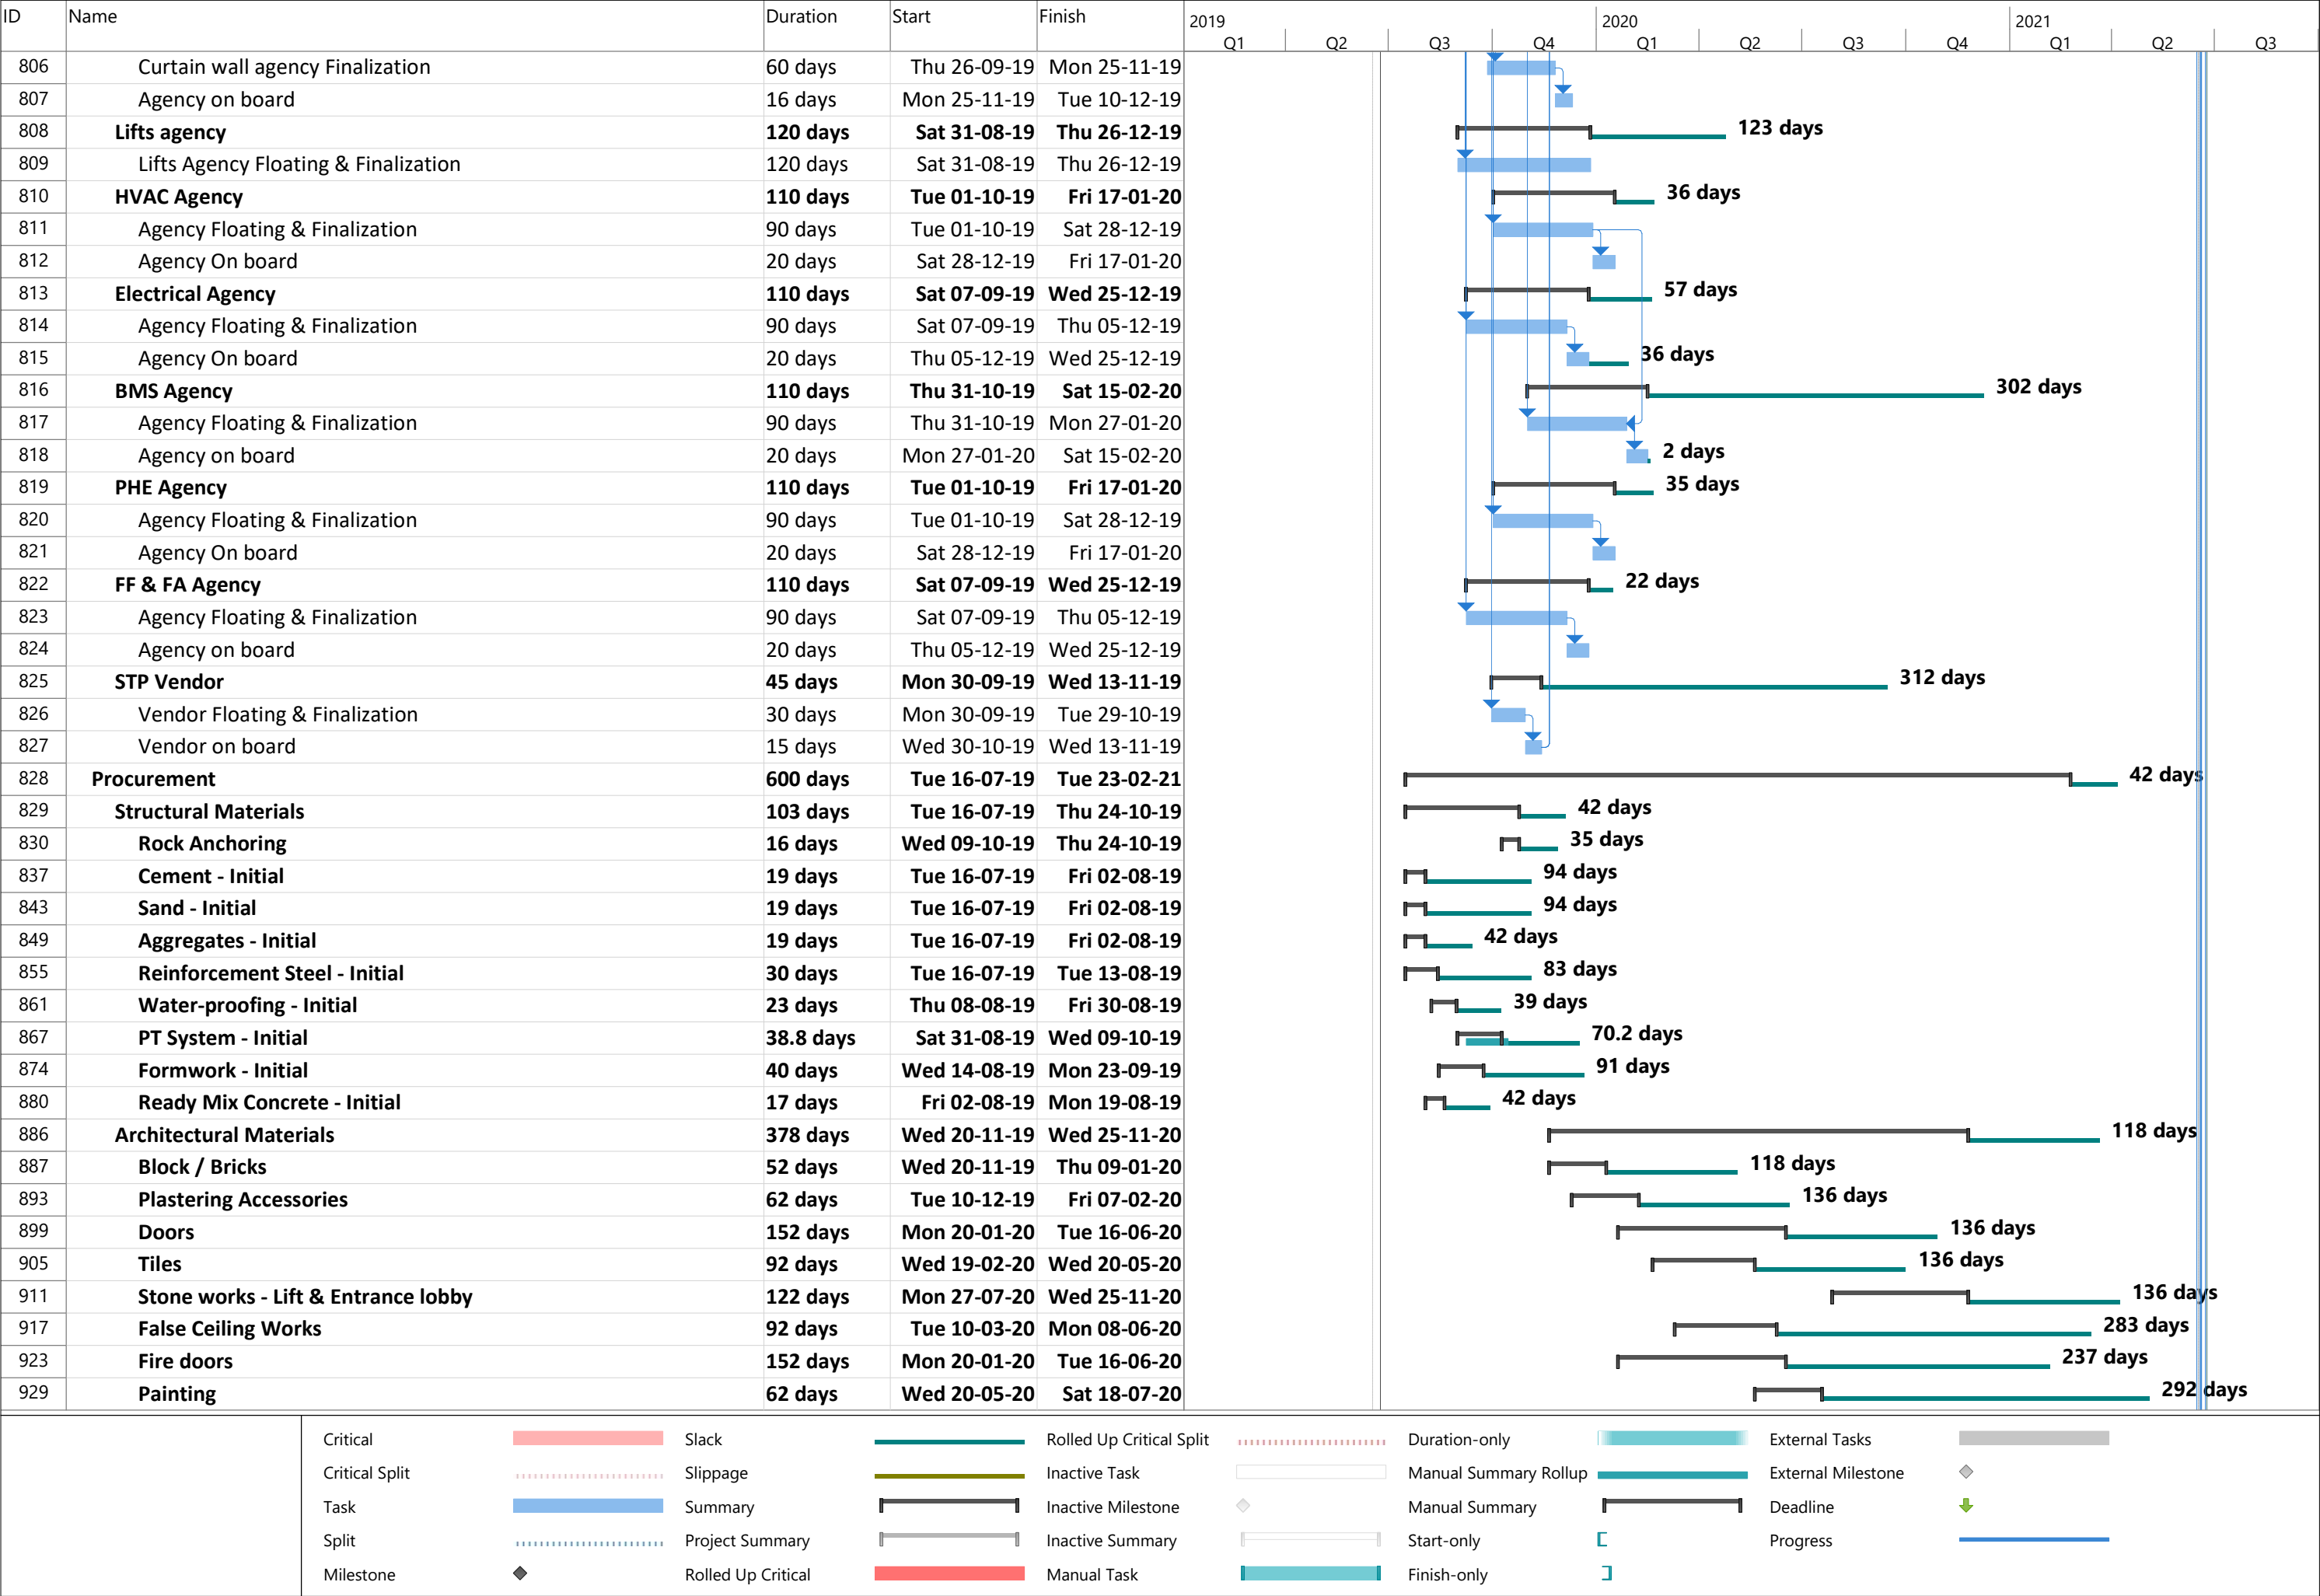

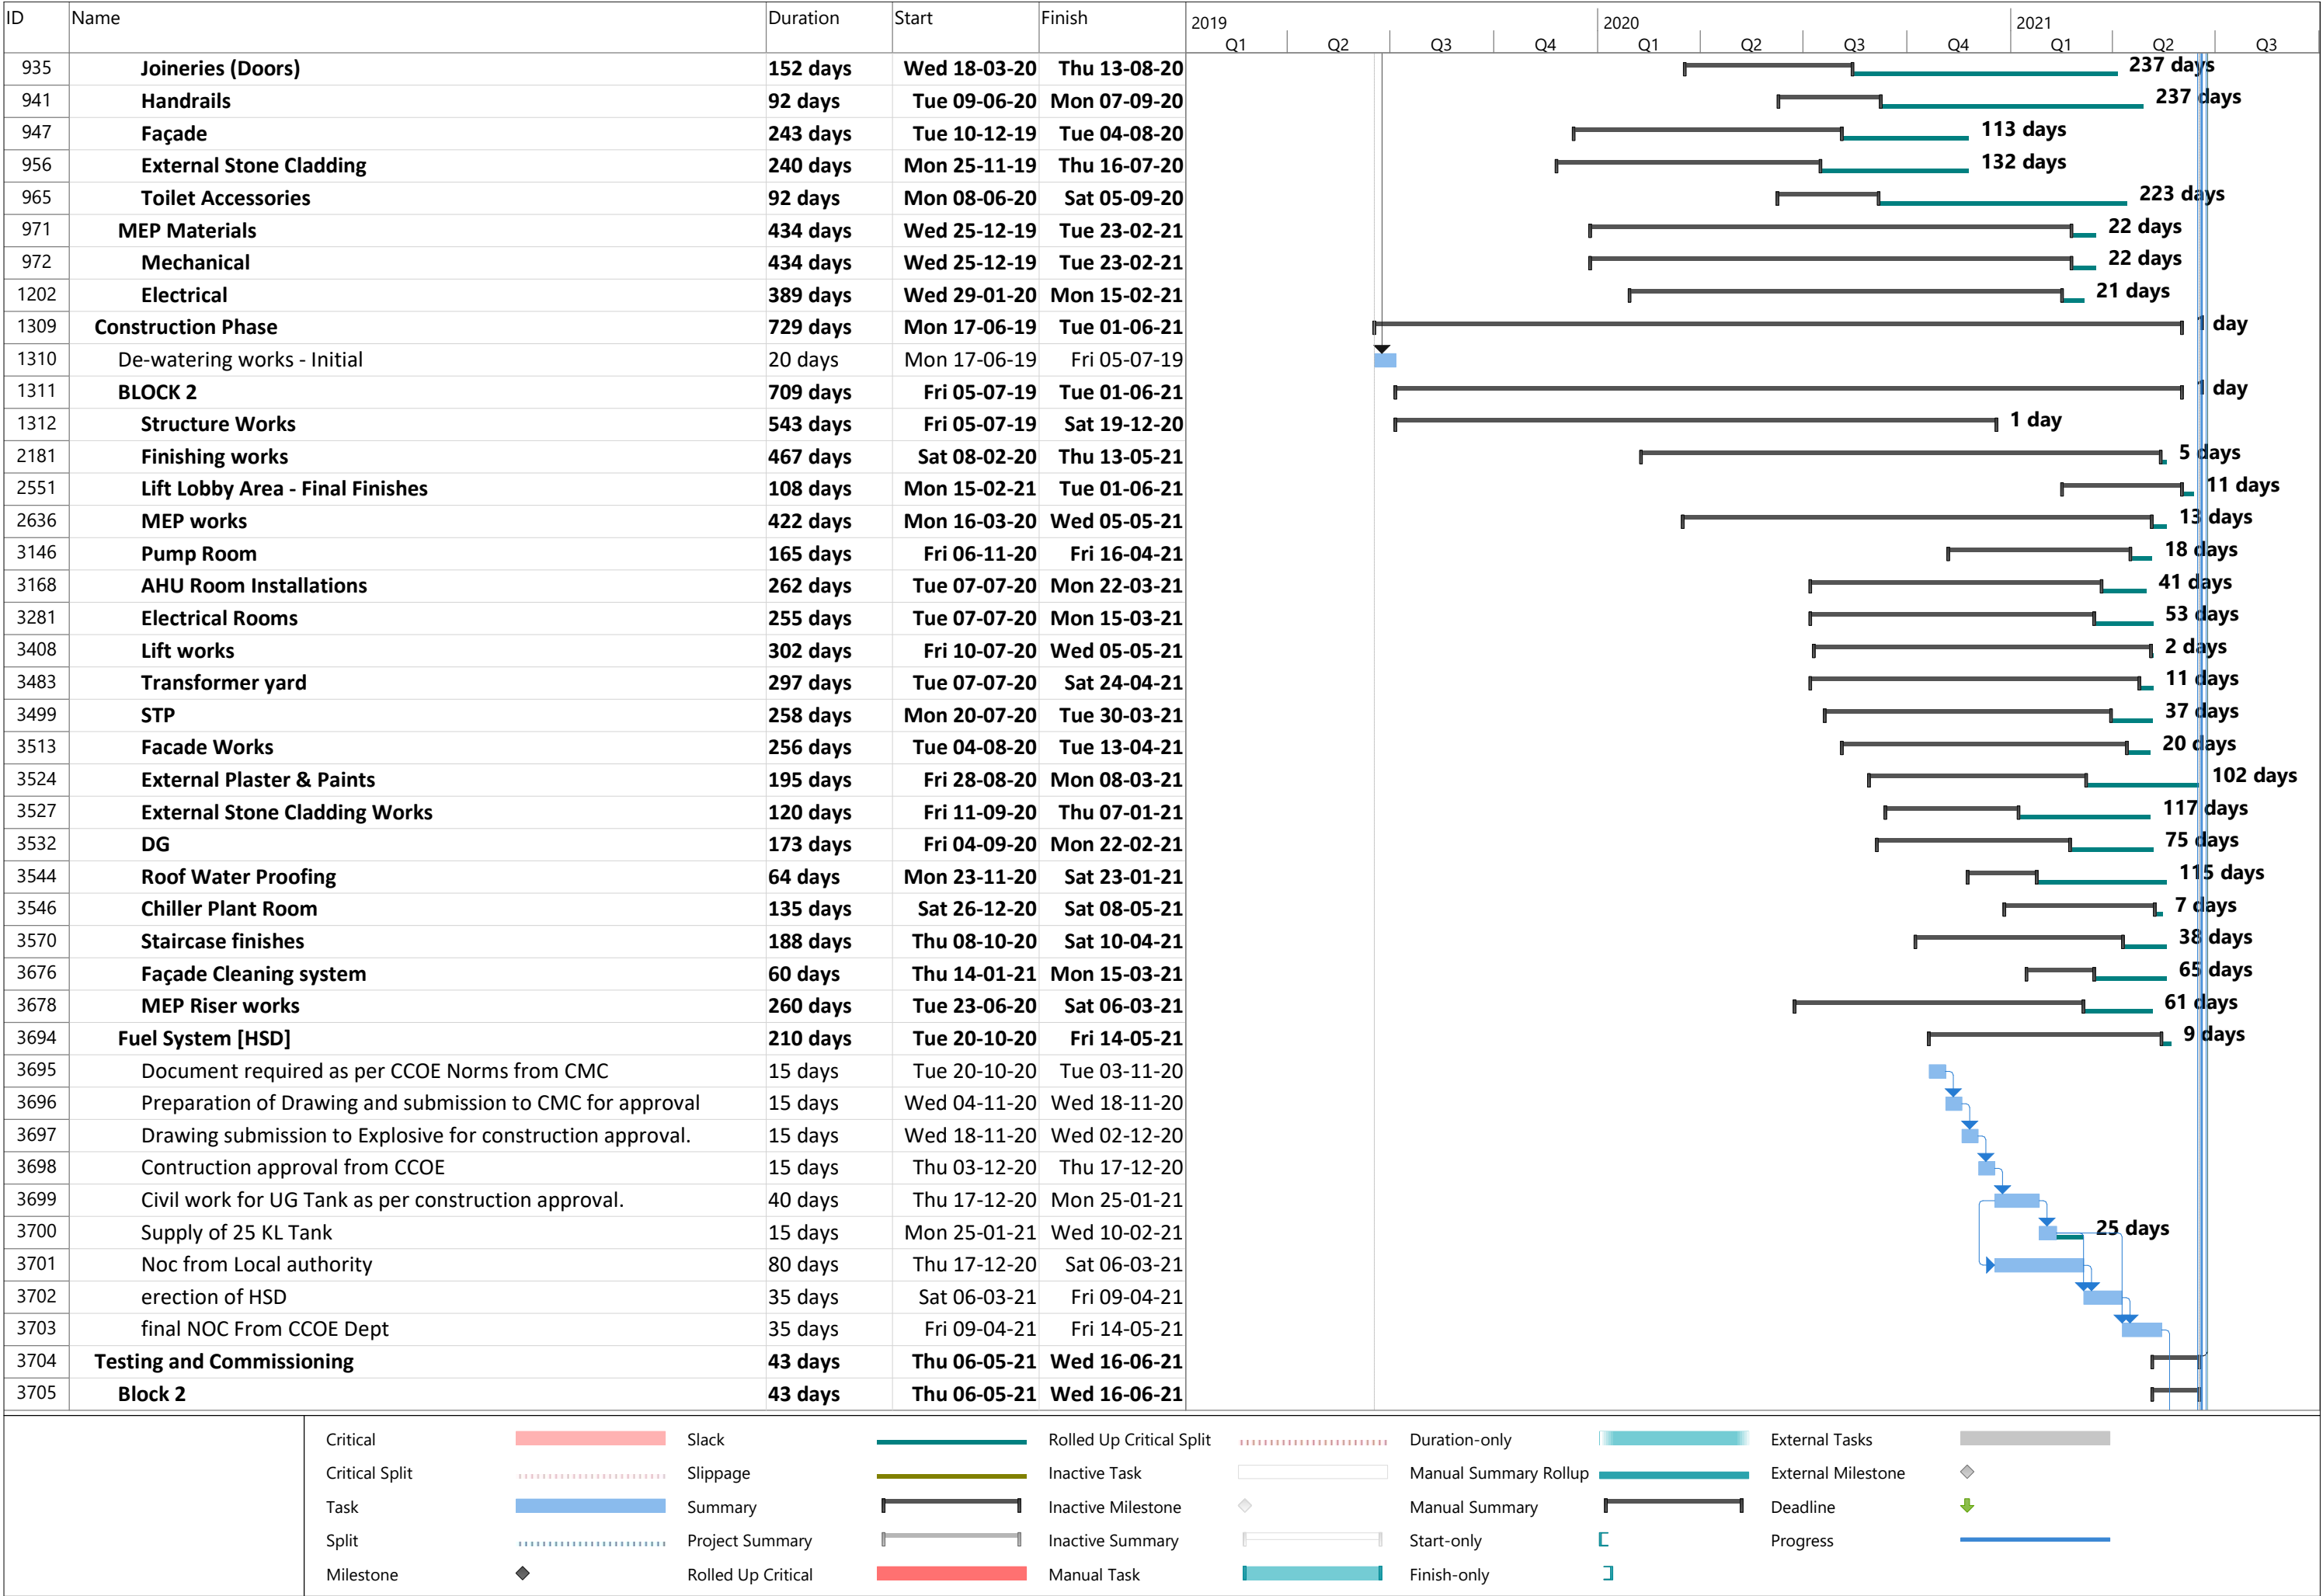

| ID   | Name                                                                | Duration       | Start                                                                               | Finish             | 2019                                                                                  |                          |                                                                                       |                       | 2020                                                                                  |                    |                                                                                       |    | 2021                                                                                       |    |    |
|------|---------------------------------------------------------------------|----------------|-------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------------------------------------|-----------------------|---------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------|----|--------------------------------------------------------------------------------------------|----|----|
|      |                                                                     |                |                                                                                     |                    | Q1                                                                                    | Q2                       | Q3                                                                                    | Q4                    | Q1                                                                                    | Q2                 | Q3                                                                                    | Q4 | Q1                                                                                         | Q2 | Q3 |
| 3706 | Mechanical Systems                                                  | 40 days        | Thu 06-05-21                                                                        | Mon 14-06-21       |                                                                                       |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |  3 days |    |    |
| 3715 | Electrical Systems                                                  | 43 days        | Thu 06-05-21                                                                        | Wed 16-06-21       |                                                                                       |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |         |    |    |
| 3724 | Snagging & Desnagging                                               | 30 days        | Thu 13-05-21                                                                        | Fri 11-06-21       |                                                                                       |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |         |    |    |
| 3725 | Block 2                                                             | 30 days        | Thu 13-05-21                                                                        | Fri 11-06-21       |                                                                                       |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |         |    |    |
| 3726 | Snagging & Desnagging BLOCK 2                                       | 30 days        | Thu 13-05-21                                                                        | Fri 11-06-21       |                                                                                       |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |         |    |    |
| 3727 | Statutory Approvals                                                 | 33 days        | Fri 14-05-21                                                                        | Tue 15-06-21       |                                                                                       |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |         |    |    |
| 3728 | Block 2                                                             | 33 days        | Fri 14-05-21                                                                        | Tue 15-06-21       |                                                                                       |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |         |    |    |
| 3729 | Structural stability Certificate                                    | 25 days        | Fri 14-05-21                                                                        | Tue 08-06-21       |                                                                                       |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |         |    |    |
| 3730 | Explosive License for Diesel Storage (Underground) COMMON BLK 2 & 3 | 25 days        | Fri 14-05-21                                                                        | Tue 08-06-21       |                                                                                       |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |         |    |    |
| 3731 | Building Fire License                                               | 25 days        | Tue 18-05-21                                                                        | Thu 10-06-21       |                                                                                       |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |         |    |    |
| 3732 | Electrical Safety Certificate from CEIG                             | 25 days        | Wed 19-05-21                                                                        | Sat 12-06-21       |    |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |                                                                                            |    |    |
| 3733 | Lift License from Lift Inspectorate                                 | 25 days        | Sat 22-05-21                                                                        | Tue 15-06-21       |    |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |                                                                                            |    |    |
|      |                                                                     |                |                                                                                     |                    |                                                                                       |                          |                                                                                       |                       |                                                                                       |                    |                                                                                       |    |                                                                                            |    |    |
|      |                                                                     | Critical       |  | Slack              |  | Rolled Up Critical Split |  | Duration-only         |  | External Tasks     |  |    |                                                                                            |    |    |
|      |                                                                     | Critical Split |  | Slippage           |  | Inactive Task            |  | Manual Summary Rollup |  | External Milestone |  |    |                                                                                            |    |    |
|      |                                                                     | Task           |  | Summary            |  | Inactive Milestone       |  | Manual Summary        |  | Deadline           |  |    |                                                                                            |    |    |
|      |                                                                     | Split          |  | Project Summary    |  | Inactive Summary         |  | Start-only            |  | Progress           |  |    |                                                                                            |    |    |
|      |                                                                     | Milestone      |  | Rolled Up Critical |  | Manual Task              |  | Finish-only           |  |                    |                                                                                       |    |                                                                                            |    |    |

Start-onlyFinish-onlyExternal TasksExternal MilestoneDeadlineProgressManual Progress

Page 1