

DETECTION OF ECG AND CARDIAC DISORDER USING BIOMEDICAL SENSOR

A Project Report Phase – II

Submitted in partial fulfillment of the
requirements for the award of
Bachelor of Engineering Degree in Electronics and Communication Engineering

by

**MUHAMMADH NAZICK (Reg. No.39130299)
NISHANTH K (Reg. No. 39130327)**



**DEPARTMENT OF ELECTRONICS AND COMMUNICATION
ENGINEERING
SCHOOL OF ELECTRICAL AND ELECTRONICS**

SATHYABAMA

**INSTITUTE OF SCIENCE AND TECHNOLOGY
(DEEMED TO BE UNIVERSITY)**

**Accredited with Grade "A" by NAAC I 12B Status by
UGC I Approved by AICTE JEPPIAAR NAGAR,
RAJIV GANDHI SALAI, CHENNAI – 600 119.**

APRIL- 2023



SATHYABAMA

**INSTITUTE OF SCIENCE AND TECHNOLOGY
(DEEMED TO BE UNIVERSITY)**

Accredited with 'A' grade by NAAC
Jeppiaar Nagar, Rajiv Gandhi Salai, Chennai - 600 119
www.sathyabama.ac.in

**DEPARTMENT OF ELECTRONICS AND COMMUNICATION
ENGINEERING**

BONAFIDE CERTIFICATE

This is to certify that this Project Report is the bonafide work of **MUHAMMADH NAZICK (39130299), NISHANTH K (39130327)** who carried out the project entitled **"DETECTION OF ECG AND CARDIAC DISORDER USING BIOMEDICAL SENSOR"** under our supervision from November 2022 to April 2023.

Internal Guide

Ms. Mary Sajin Sanju, M.Tech., (Ph.D)

Head of the Department

Dr. T. RAVI, M.E., Ph.D

Submitted for Viva voce Examination held on 19-04-2023

Internal Examiner

External Examiner

DECLARATION

We **MUHAMMADH NAZICK (39130299)** and **NISHANTH K (39130327)** hereby declare that the Project Report entitled “**DETECTION OF ECG AND CARDIAC DISORDER**” done by us under the guidance of **Ms. Mary Sajin Sanju.I, M.Tech, (Ph.D.)**, at **Sathyabama Institute of Science and Technology** is submitted in partial fulfillment of the requirements for the award of Bachelor of Engineering degree in Electronics and Communication Engineering.

SIGNATURE OF THE CANDIDATES

DATE: 19-04-2023

PLACE: CHENNAI

1.



2.



ACKNOWLEDGEMENT

We are pleased to acknowledge our sincere thanks to **Board of Management of SATHYABAMA** for their kind encouragement in doing this project and for completing it successfully. We are grateful to them.

We convey our thanks to **Dr. N. M. NANDHITHA, M.E., Ph.D., Professor & Dean, School of Electrical and Electronics** and **Dr. T. RAVI, M.E., Ph.D., Professor & Head, Department of Electronics and Communication Engineering** for providing us necessary support and details at the right time during the progressive reviews.

We would like to express my sincere and deep sense of gratitude to our **Project Guide Ms. Mary Sajin Sanju.I, M.Tech, (Ph.D.)**, for her valuable guidance, suggestions and constant encouragement paved way for the successful completion of our project work.

We wish to express our thanks to all Teaching and Non-teaching staff members of the Department of Electronics and Communication Engineering who were helpful in many ways for the completion of the project.

ABSTRACT

Heart rate is the number of times the heart beats per minute. Heart rate is a very vital health parameter that is directly related to the soundness of the human cardiovascular system. While the heart is beating, it is pumping blood throughout the body, and that makes the blood volume inside the finger artery to change too. This fluctuation of blood can be detected through a pulse sensing mechanism placed around the fingertip. So, every time the heart beats the amount of reflected which can be detected by the sensors with a high gain amplifier. This little alteration in the amplitude of the reflected light can be converted into a pulse.

The possibility of a heart attack would be decreased and many lives would be saved by this real-time monitoring of a patient's heart. These systems acquired data may be used further for analytical purposes. Health Care Tracking is done by Fitness Trackers, Smart Fitness Watches and Portable ECG Sensors. This paper describes a technique of measuring the heart through a microcontroller and few other sensors to check whether heart is functioning in a proper manner or not.

TABLE OF CONTENTS

CHAPTER	TITLE	Page No
	ABSTRACT	v
	LIST OF FIGURES	ix
	LIST OF TABLES	x
1	INTRODUCTION	
	1.1 ECG Data Acquisition and Wireless Transmission	1
	1.2 Problem Statement	4
	1.3 Proposed Solution	4
	1.4 Objective of the Project	4
2	LITERATURE SURVEY	5
3	SYSTEM DESIGN	
	3.1 Software Requirements	9
	3.2 Hardware Requirements	9
	3.3 Project Description	9
	3.4 Solution	10
	3.5 Block Diagram	11
	3.6 System Flowchart	12
	3.7 Methodology	13
	3.8 Processing Signal	18
	3.9 Displaying Via Bluetooth on Phone	19
4	HARDWARE DESCRIPTION	
	4.1 Arduino	21
	4.2 Arduino UNO	23
	4.2.1 Pin Diagram	26

4.3	16x2 LCD Module	28
4.3.1	Features of 16x2 LCD	30
4.3.2	Display Custom Characters on 16x2 LCD	31
4.4	Jumper Wire	32
4.4.1	Potentiometer	32
4.5	Microcontroller (ESP8266)	33
4.6	Datasheet ESP8266	34
5	SOFTWARE DESCRIPTION	
5.1	Introduction	36
5.2	Arduino UNO	38
5.2.1	Features of Arduino	39
5.3	Structures	39
5.4	Datatypes	41
5.5	MATLAB	42
5.5.1	Classes and Object-Oriented Programming	44
6	CONCLUSION AND FUTURE SCOPE	
6.1	Conclusion	46
6.2	Future Work	46
	REFERENCES	47
	APPENDIX	
	A. Source Code	50

LIST OF ABBREVIATIONS

ABBREVIATIONS	DESCRIPTION
ECG	Electro Cardiography
HRV	Heart Rate Variability
SA	Sino Atria
AV	Atrio Ventricular
HR	Heart Rate
SNR	Signal To Noise Ratio
LMS	Least Mean Square
FFT	Fast Fourier Transform
DFT	Discrete Fourier Transform
STFT	Short Term Fourier Transform
CLB	Configurable Logic Blocks
CWT	Continuous Wavelet Transform
DWT	Discrete Wavelet Transform
FPGA	Field Programmable Gate Array
ASIC	Application Specific Integrated Circuit
IC	Integrated Circuit
DSP	Digital Signal Processing
EMG	Electromyography

LIST OF FIGURES

FIG NO	TITLE	Page No
1.1	ECG Machine	1
1.2	ECG Waveform	2
2.1	Probability of Cardiovascular Disease by age, sex	6
2.2	Rate of Cardiovascular Disease Deaths	8
3.1	Block Diagram	11
3.2	System Flowchart	12
3.3	A Basic ECG Signal	14
3.4	QR Waveform	14
3.5	P, T And U Waves	15
3.6	Normal ECG Wave	16
3.7	Arrhythmia wave	17
4.1	Arduino NANO	21
4.2	Arduino MEGA2560	22
4.3	Arduino Micro	22
4.4	Arduino Due	22
4.5	Arduino UNO	23
4.6	Pin Diagram of Arduino UNO	26
4.7	16x2 LCD Display Pin Diagram	28
4.8	Jumper wire	32
4.9	Potentiometer	32
4.10	ESP8266 Microcontroller	33
4.11	ESP8266 Datasheet	34
4.12	Block Diagram of ESP8266	35
5.1	Arduino Interface	38
5.2	MATLAB Interface	43

LIST OF TABLES

S.NO	FIG NAME	Table No
1	Technical Specifications of Arduino	4.1
2	Pin description of Arduino	4.2
3	LCD Pin Description	4.3
4	Command Codes for LCD	4.4

CHAPTER 1

INTRODUCTION

1.1 ECG DATA ACQUISITION AND WIRELESS TRASMISSION:

The Electrocardiogram (ECG) is an estimation of the electrical action of the heart after some time, caught and remotely recorded as estimated by skin terminals. The signs demonstrate the general cadence of the heart and shortcomings in various pieces of the heart muscle. This strategy is the most ideal approach to gauge and analyse strange rhythms of the heart, and is usually utilized in medical clinics everywhere throughout the world. It is additionally utilized in sports and military conditions for cutting edge diagnostics of healthy people.



FIG 1.1: ECG Machine

As of late, the exploration network has been dynamic in quest for advancements for a "Remote ECG" where patients are not, at this point required to be connected to a huge fixed gadget while their ECG signals are observed. A significant help behind this pattern is the decreased human services expenses of remote observing, where patients can live in their homes as opposed to involve a medical clinic bed. Numerous frameworks have been proposed to achieve this accomplishment, with changing objectives and approaches. Remote ECG checking should be possible utilizing 3, 4, 5 or 10 sensors, giving progressively itemized data to cardiologists.

The circuitry which is used for capturing and monitoring the data is wearable in nature, which further is transmitted to a close by receiving device. Receiving device can be of both type simple or complex, basic logging or analysis device in case of simple receiving device whereas large hospitals where ECG data is collected actively wirelessly from multiple patients at a time in case of complex receivers. There are two categories in which a wireless ECG system is grouped i.e., first group being the systems with wired sensors which allows patients to be free from being tied to the bulky equipment and for connecting all the sensors to central PDA- sized device it uses physical wires in order for transmission of data to the monitoring systems wirelessly, and another group being systems with wireless sensors.

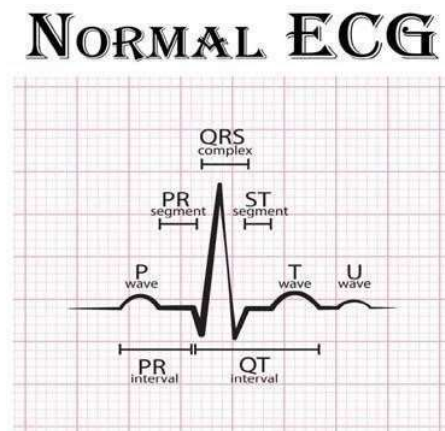


FIG 1.2: ECG WAVEFORM

The fundamental target of this venture is to give most extreme accommodation to the client or patient with most extreme comfort during ECG method, particularly for since quite a while ago run. Use of the advanced innovation and media transmission to produce the intelligent social insurance supplies is the capacity of remote innovation. For the proficient remote observing framework, utilizing for constant, consistent, and precisely data of patient heart condition, the remote frameworks are utilized. In this venture we will structure remote ECG sensor and show its yield on LCD screen remotely.

Willem Einthoven in 1900's, developed ECG method. The Electrical activity of the heart is measured with help of ECG method. There are four chambers inside a human heart which are named as follows. Inferior and superior vena cava is the two large veins through which blood enters inside the heart. How is oxygen added to the blood- blood when it enters the heart is poor blood or blood with carbon dioxide in it, when it enters right atrium through veins it is then directed to the right ventricle from where it is pushed to lungs, where gas exchange process takes place and oxygen is added to the blood and after addition of oxygen it is again pushed back from the lungs to the left atrium, from here it is forwarded to left ventricle and from here finally oxygenated blood is supplied to each and every part of body through arteries.

There are two main phases in which ECG works:

Depolarization - Mechanical contraction of either atrium or ventricle is depolarization.

Repolarization. - Mechanical relaxation of either atrium or ventricle is repolarization.

1.2 PROBLEM STATEMENT

The ECG signals are plotted in the Mill volt extend, in this way are inclined to a great deal of impedance from different sources. The meddling sources are isolated into 3 separate gatherings:

- Noise starting from sources outer to the patient

- Interference starting from the patient undesirable possibilities.

- Interference starting from understanding anode contact.

1.3 PROPOSED SOLUTION

The solution of this project is to develop a method that aims to wireless ECG monitoring of heart activity for patients with heart diseases, faulty pacemakers, and other special heart conditions in order to enable a patient to lead an active life without being confined to various restrictions or specific region. Being able to monitor sick patients remotely, Peace of mind can be obtained by the family after being able to monitor sick patients remotely, as they know that emergency services will be dispatched if any emergency like cardiac arrest or irregular heart patterns occurs.

1.4 OBJECTIVE OF THE PROJECT

The primary goal of this undertaking is to give most extreme comfort to the client or patient with most extreme accommodation during ECG technique, particularly for since quite a while ago run. Use of the advanced innovation and media transmission to produce the intelligent medicinal services supplies is the capacity of remote innovation. For the effective remote checking framework, utilizing for constant, consistent, and precisely data of patient heart condition, the remote frameworks are utilized. In this undertaking we will structure remote ECG sensor and show its yield on LCD screen remotely.

CHAPTER 2

LITERATURE SURVEY

Low-Cost ECG Monitoring System for the Patient using Smart Device:

Design and Implementation Miss. Komal Kharde, Miss. Vaishali Shinde, Prof. P. R. Ugale, Student, BE Computer, SPCOE, Department of Computer Engineering, Dumbarwadi, Assistant Professor, SPCOE, Department of Computer Engineering, Dumbarwadi: Cardiovascular Disease (CVD) is one of the major reasons of death in the world. Heart arrest rate is rising very fast pace day by day, with current rate of 25%. The main reason behind this is the unhealthy lifestyle followed by the people. Improper medical care given to the patient at the time of cardiac arrest is one of the main reasons for the same. Regular health check-up is required to avoid various heart diseases. For some cases, frequent monitoring of ECG is required, but due to expensive equipment and time taking process it is not possible for every person to afford it, and this is the limitation of the ECG system that is most used in the hospitals. In order to overcome this and to monitor ECG of an individual anytime and anywhere followed by sending the report to the doctor for further communication, there is a need of a device which is portable, cost effective, less power consuming and time efficient. This paper illustrates a portable, cost effective, less power consuming and time efficient ECG monitoring device development. The platform used for transmission is Android because of its common availability on mobile phones and due to its future growth.

ECG Monitoring System using Arduino and ESP8266 Dr. N.Shanmugasundaram,R.Bharathkumar, T.Gowthamraj, V.Kaliyugathuayyan, A.Manojkumar Sri Eshwar College of Engineering, Coimbatore, Tamil Nadu, India: Designing of ECG monitoring system with the help of ESP8266 and Arduino microcontroller is illustrated by this paper. Input to the system is given in the form of pulse taken with the help of Ag/Cl 3-lead electrodes attached on the right leg and arms of the patient. Pulse from patient is taken under proper inspection. For signal conditioning of the input pulse and to view it on the serial monitor window as an ECG waveform, an ECG module (ESP8266) is comprehended by this model. In order to control and transmit the functionality of the ECG wave to monitor. and also, for displaying the normality or abnormality of the ECG wave along with the ECG wave on LCD, microcontroller Arduino UNO is used to process conditioned signal.

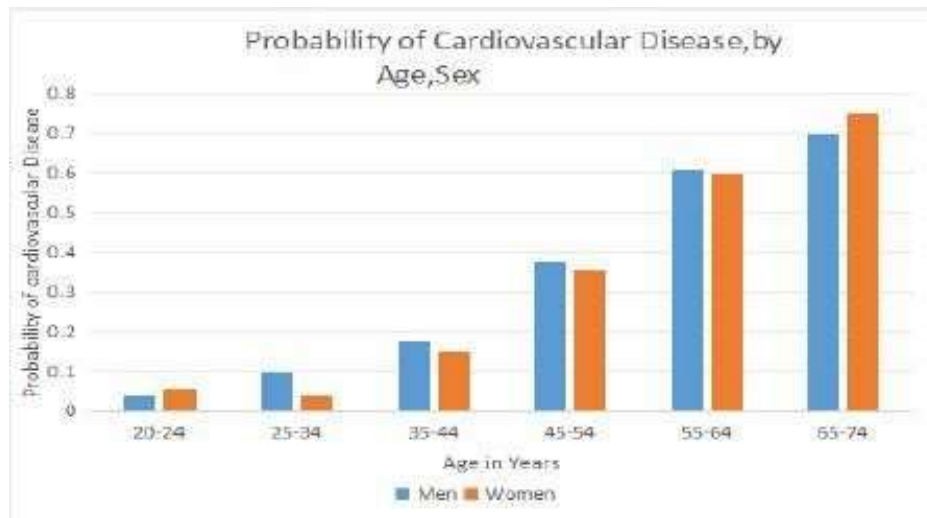


FIG 2.1: PROBABILITY OF CARDIOVASCULAR DISEASE BY AGE, SEX

Real Time ECG and Saline Level Monitoring System Using Arduino UNO Processor P.Kalaivani, T.Thamaraiselvi, P.Sindhuja and G.Vegha Assistant Professor, Department of Electronics and Communication Engineering, SNS College of Engineering, Coimbatore ,India. UG Student, Department of Electronics and Communication Engineering, SNS College of Engineering, Coimbatore, India. UG Student, Department of Electronics and Communication Engineering, SNS College of Engineering, Coimbatore, India. UG Student, Department of Electronics and Communication Engineering, SNS College of Engineering, Coimbatore, India: In this era the lifestyle of an individual is highly affected by the growth of wireless technology and mobile services. Many early attempts have been made by the medical industry to introduce these technologies in medical science. In order to contribute in the same line development of wireless ECG monitoring system is new and innovative idea. The aim of this system is to provide. health care to a patient at the time of emergency anywhere irrespective of the situation and place. In this system ECG of a patient is sensed through electrode system via ESP8266 whose goal is to provide Arduino with amplified minor and small bio signals for processing along with the saline levels. IR sensors are used to detect saline levels. For indicating saline levels and for showing electrical pulse output LCD and serial monitor are used respectively. Serial plotter is used for displaying analog signal. Rest all outputs are displayed through mobile application

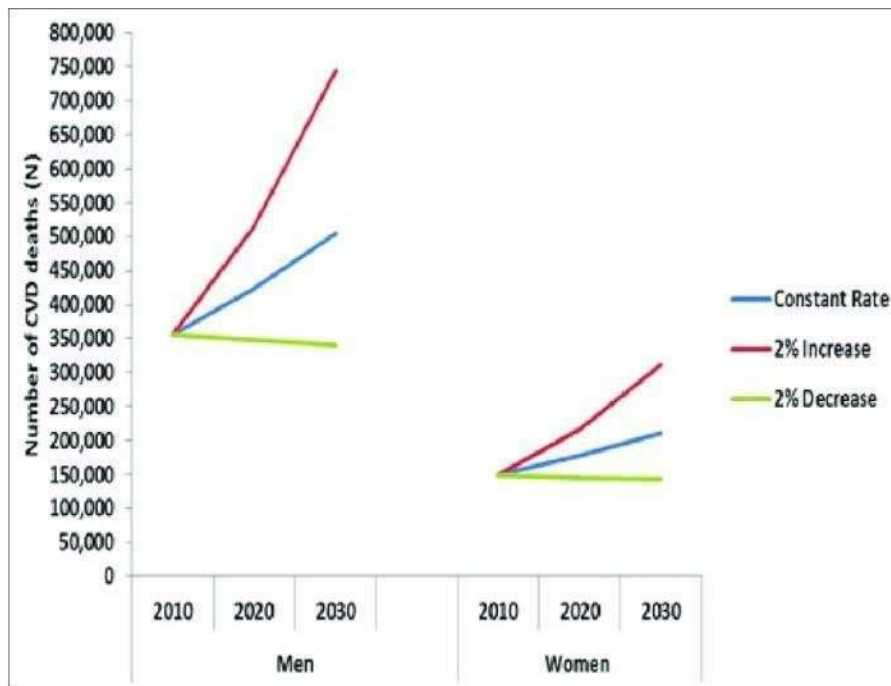


FIG 2.2: RATE OF CARDIOVASCULAR DISEASE DEATHS

Real Time ECG Signal Transmission for Remote Monitoring Allada Tirupathi Rao, M.Gopi, M.V.S.S.Prasad: This paper illustrates the development of a wireless monitoring system that monitors patient's heart rate as its major objective. It further illustrates easy-to-use and noninvasive monitoring of the 20 ECG using wireless steering wheel. A prototype model in terms of steering wheel is used. A continuous wavelet transforms based algorithm for detecting the heart rate is used because of its special design to avoid noise and interference while acquiring ECG. Heart pulses are monitored from the recorded nerve voltages. The recorded voltages are then sent to amplifier for amplification and then to a filter for removing noise. Then, an analog to digital convertor (ACD) is used which converts analog voltages to digital voltages which are then stored in EEPROM of Arduino. These values are then sent to PC wirelessly.

CHAPTER 3

SYSTEM DESIGN

The framework equipment and programming prerequisites for the usage of the proposed project are referenced beneath:

3.1 SOFTWARE REQUIREMENTS

1. MATLAB
2. ARDUINO UNO.

3.2 HARDWARE REQUIREMENTS

1. Arduino Uno.
2. Jumper Wire
3. Potentiometer
4. Microcontroller (ESP8266)

3.3 PROJECT DESCRIPTION

In order to maintain the wellness of the patient thorough assessment is utmost importance. The ECG seems to have a lot many benefits. Heart diseases cause about 7.3 million of deaths every year. Electrical activity of the heart in recorded form is known as Electrocardiography. ECG can comfortably monitor several coronary heart malfunctions or disorders.

Advantages of ECG are listed below:

Chest and abdominal pain etc. information is given by ECG.
Cost effective and safe method. Silent heart condition can be detected. Low mobility. It is a diagnostic method.

I

Main challenges faced by ECG devices are listed below:

- i. A convenient ECG observing framework with at standard exactness and which is incorporated with different capacities which make it fit in the homecare administrations and adequate execution is required.
- ii. A FPGA board ought to be utilized to make a convenient inserted framework for most appropriate home consideration and wellbeing observing.
- iii. FPGA strategy to be utilized so as to perform ECG pre-preparing and pulse changeability (HRV) highlight extraction based on disconnected information sheet

Parallel Processing of Large-Scale ECG data analysis

3.4 SOLUTION

The solution of this project is to develop a method that aims to wireless ECG monitoring of heart activity for patients with heart diseases, faulty pacemakers, and other special heart conditions in order to enable a patient to lead an active life without being confined to various restrictions or specific region. Being able to monitor sick patients remotely, Peace of mind can be obtained by the family after being able to monitor sick patients remotely, as they know that emergency services will be dispatched if any emergency like cardiac arrest, or irregular heart patterns occurs.

3.5 BLOCK DIAGRAM

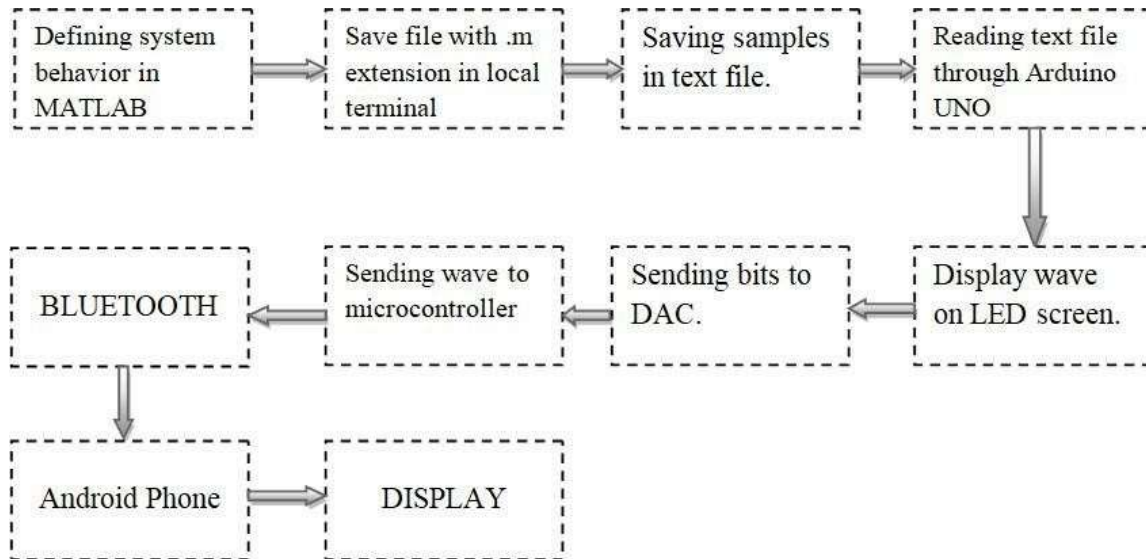


Fig 3.1 Block Diagram

The circuitry which is used for capturing and monitoring the data is wearable in nature, which further is transmitted to a close by receiving device. Receiving device can be of both type simple or complex, basic logging or analysis device in case of simple receiving device whereas large hospitals where ECG data is collected actively wirelessly from multiple patients at a time in case of complex receivers. There are two categories in which a wireless ECG system is grouped i.e., first group being the systems with wired sensors which allows patients to be free from being tied to the bulky equipment and for connecting all the sensors to central PDA- sized device it uses physical wires in order for transmission of data to the monitoring systems wirelessly, and another group being systems with wireless sensors

3.6 SYSTEM FLOWCHART:

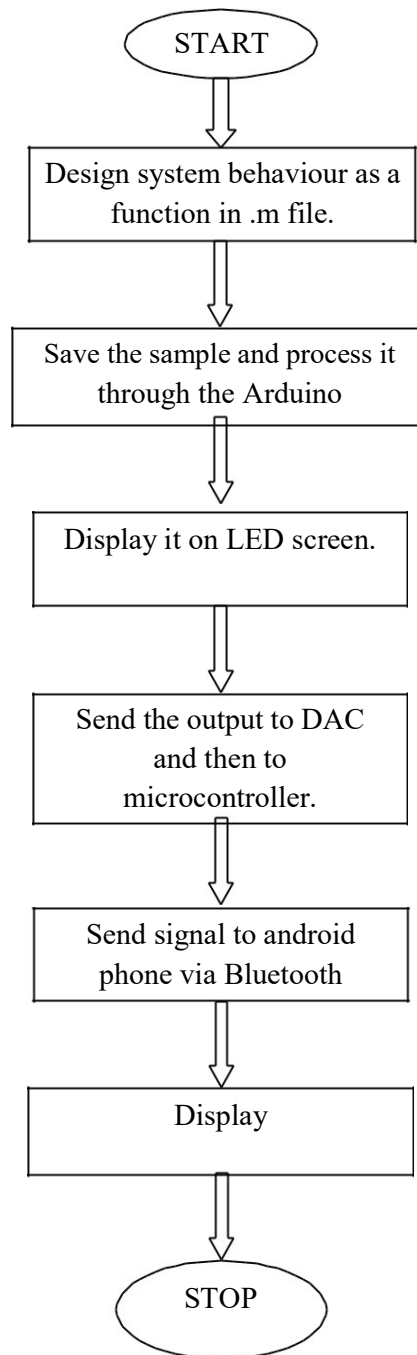


Fig 3.2 System Flow Chart

3.7 METHODOLOGY

GENERATING CODE THROUGH MATLAB

For specialized figuring MATLAB is considered as a superior language. It incorporates computation, perception, and writing computer programs is coordinated in a situation which is effectively utilized by people, and where fundamental scientific documentation is utilized for communicating issues and arrangements.

Together P, Q, R, S, T and U waves as appeared underneath is utilized to speak to a fundamental ECG wave structure. Q, QRS, S waves and P, T, U waves can be spoken to by triangular and a sinusoidal waveform individually. By the expansion of these waves an ECG sign can be created. Fourier arrangement is utilized to speak to an ECG wave as it is intermittent in nature.

Modelling of Basic ECG signal using Fourier Series: It is Shown below

$$F(x) = \frac{a_0}{2} + \sum_{n=1}^{\infty} [a_n \cos(n\omega x) + b_n \sin(n\omega x)]$$

Where,

$F(x)$ → represents instantaneous amplitude of an ECG signal.

a_0 → constant, representing average amplitude value.

X → variable representing angular

T → period of ECG signal.

a_n, b_n → Fourier coefficient.

a_0, a_n, b_n and are calculated by given formulas:

$$a_0 = \frac{2}{T} \int_0^T f(x) dx$$

$$b_n = \frac{2}{T} \int_0^T f(x) \sin(n\omega x) dx$$

MODELLING OF Q, QRS AND S WAVES WITH FOURIER SERIES:

Q, QRS and S waves can be assumed in triangular waveform as below. Let the period of signal be equal to $T = 2l$ and it is assumed that the amplitude of signal, $f(x)$ can be calculated as,

$$\begin{aligned} &((-bax/l) + a) \text{ if } (0 < x < (1/b)) \\ &f(x) = 0 \text{ if } x = 0 \\ &((bax/l) + a) \text{ if } ((-1/b) < x < 0) \end{aligned}$$

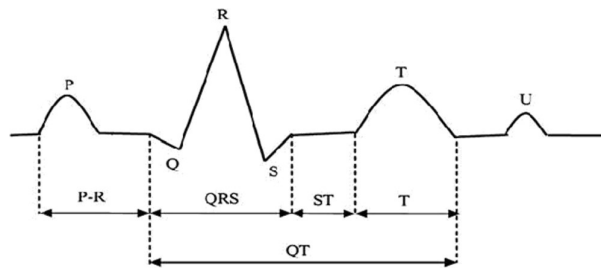


FIG 3.3: A basic ECG Signal

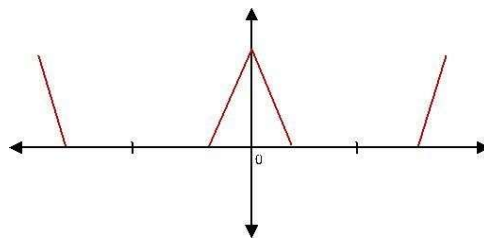


Fig 3.4: QR WAVEFORM

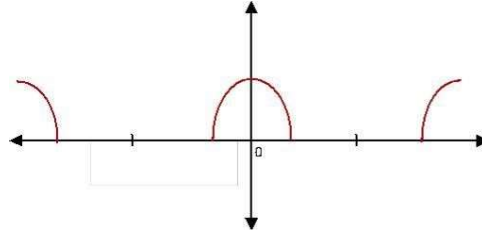


FIG 3.5: P, T AND U WAVES

$f_{Q, QRS, S}(x)$ can be calculated as shown below. It can be seen below no sinusoidal harmonic since $f_{Q, QRS, S}(x)$ is symmetric and $b_n = 0$

$$f_{Q, QRS, S}(x) = (a_0/2) + \sum_{n=1}^{\infty} a_n \cos(n\pi x/b)$$

From the above equation we get,

$$a_0 = (a/b),$$

$$a_n = \frac{2}{b} \int_{-b/2}^{b/2} f(x) \cos(n\pi x/b) dx = \frac{2}{b} \int_{-b/2}^{b/2} \cos(n\pi x/b) dx = \frac{2}{b} \left[\frac{\sin(n\pi x/b)}{n\pi/b} \right]_{-b/2}^{b/2} = \frac{2}{n\pi} (1 - \cos(n\pi))$$

MODELLING OF P, T AND U WAVES WITH FOURIER SERIES:

P, T and U waves can be assumed in sinusoidal waveform, thus, $f(x)$ can be calculated by

$$f(x) = \cos(n\pi x/2l), \text{ if } (-1/b) < x < (1/b)$$

$f_{P, T, U}(x)$ may be written as, it can be seen below no sinusoidal harmonic wave since $f_{P, T, U}(x)$ is symmetric and $b_n = 0$

$$f_{P, T, U}(x) = (a_0/2) + \sum_{n=1}^{\infty} a_n \cos(n\pi x/l)$$

$$n=1$$

and are solved by the help of above equation, we get, $a_0 = 4/\pi b$

$$a_n = (4b \cos(n\pi/b)) / (\pi(b-2n)(b+2n))$$

Finally, we get a clear ECG signal consists of the combination of P, Q, R, S, T and U waves. Thus, it can be calculated as

$$f_{ECG} = f_Q(x) + f_{QRS}(x) + f_S(x) + f_P(x) + f_T(x) + f_U(x)$$

MODELLING OF ARRHYTHMIAS WITH FOURIER SERIES:

Arrhythmias can be differentiated with the normal ECG based on heartbeat forms as it has irregular heartbeat forms unlike normal ECG signals. For example, Absence of some essential components of ECG like P, U wave and may be any other wave, extreme amplitudes value that is either very high or very low which results in either very high or very low heartbeat can be classified as arrhythmia. Fourier series is used here in order to model nine (9) arrhythmia types, by making various small changes in the final equation of normal ECG wave. It will show in Fig:3.6 and Fig 3.7

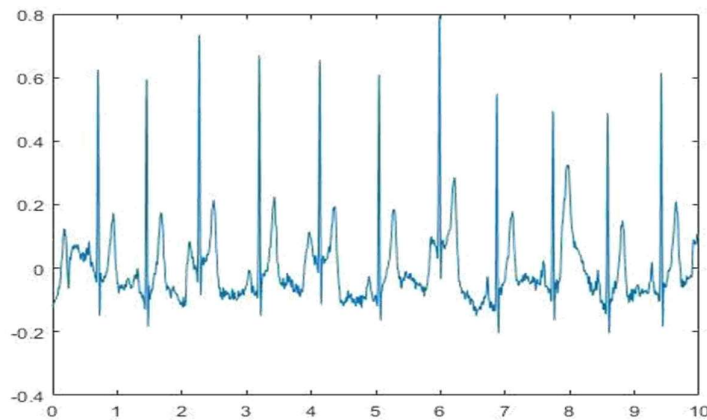


FIG 3.6: NORMAL ECG WAVE

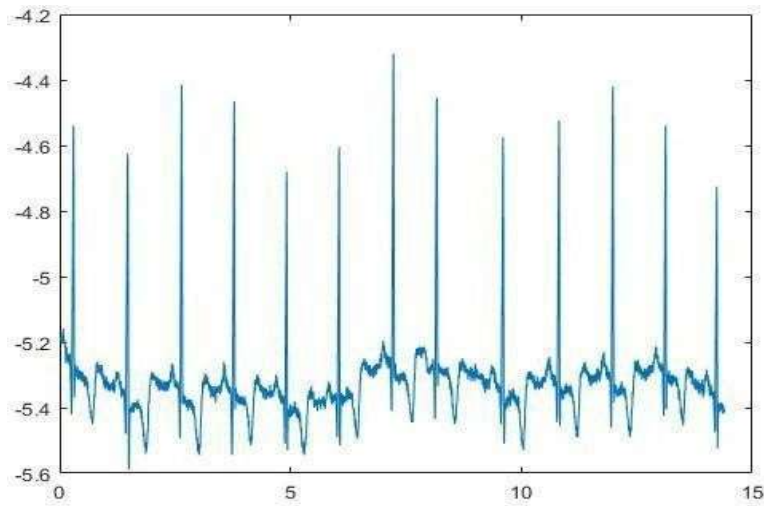


FIG 3.7: ARRHYTHMIA WAVE

READING TXT FILE THROUGH ARDUINO AND DISPLAY ON SCREEN:

The Arduino Uno board, pre-modified with the Arduino boot loader is utilized in this venture. Arduino IDE form 1.0.3 on windows working framework is utilized as the programming IDE for this undertaking. The Arduino expert smaller than expected board has worked in ADC which peruses as well as changes into their computerized equal. The info arrives at the ADC with the assistance of information channels that are most extreme eight in number and are set apart in board as A0, A1, A2, etc. till A7 and can be designed as simple information pins.

In this specific undertaking pin A0 is associated with the variable pin of the potentiometer. VCC and GND are associated with the other two pins of the potentiometer to isolate the voltage as the variable moves consequently furnishing the Arduino board with flexibly voltage as simple information.

There is a worked in function in the Arduino IDE which helps in perusing the simple incentive from input, called analog Read (). Impression of the waveform shown on a LCD is dictated by the deferral () function. This capacity is utilized in request to create a postponement between the code steps delay () function is utilized and in this specific undertaking for setting delay between the progressive showcases of the custom characters this capacity has been utilized.

The information given to the postponement () function is the simple sensor esteem which is perused with the assistance of analog Read () function by the utilization of some alignment procedures. At that point the simple voltage read from the sensor will be identical to the produced delay. In this task waveform was created through custom characters that equivalent.

3.8 PROCESSING SIGNAL:

Data is converted from its digital form to the analog form with the help of device known as Digital to Analog Convertor or DAC. With the help of two features that is Bandwidth and Nyquist criterion any data which is in sampled form can be perfectly reconstructed - Nyquist-Shannon sampling theorem.

Precisely an analog signal can be reconstructed from its sampled data with the help of a DAC. Ultimately the conversion of digital data to an analog signal is required though it may be produced from different sources like microprocessor, Application Specific Integrated Circuit (ASIC), or Field Programmable Gate Array (FPGA), for its interaction with the real world. DACs find its applications in various digital signal processing applications and many more other applications such as:

DATA ACQUISITION SYSTEMS:

Processor receives the digitalized data by analog to digital convertor which needs to be measured. In data acquisition a process known as control end is also included, in which the feedback data is send to a DAC from processor in order to convert it to analog signals.

Because of the reasons that DACs are a largely specification driven, one can always pick the required one by identifying it by just looking at the packaging. If a cheap or cost-effective amplifier is required to go along with the DAC then FIIO is the right place to purchase it. Too much money sinking is not required and not worth it for this work.

3.9 DISPLAYING VIA BLUETOOTH ON PHONE

AFE Module is used for filtering, amplifying and digitalizing the raw ECG which is acquired by the Data Acquisition System (DAQ). The digital ECG is stored after a command to acquire the ECG data wirelessly from DAQ is received from an android application via smart phone. MATLAB is used for plotting the acquired data.

The bioelectric signal achieved from the data is shown by the ECG. There are five segments of an ECG wave known as P wave, Q wave, R wave, S wave and T wave which is additionally carried on by U wave that is contingent. For full lead ECG records, inference of 10 terminal positions is required for acquiring 12 lead ECG signals. For exact ECG signal securing spillage current under 1 A with low information and high regular mode dismissal proportion is basic. In the wake of dealing with all the previously mentioned prerequisites ECG terminals which are comprised of silver chloride (Ag Cl) material are appended to the patient's body. For securing 12 lead ECG information ADS129x ECG signal procurement chip, a Texas instrument is utilized as the Analog front end. Little size fine execution is accomplished by it. Application arranged usefulness is conveyed by

ADS129x than straightforward sign moulding. The previously mentioned chip discovers its dominant part of utilizations in Electromyography (EMG), Electrocardiography (ECG) and Electroencephalography (EEG). For synchronous inspecting process low clamour Programmable Gain Amplifiers (PGAs) eight in number and high goals 24-piece Analog to Digital Converters which are additionally eight in number alongside an on-board oscillator and a reference voltage are fused in the chip. The enhancers are additionally enveloped for Right Leg Drive (RLD), Wilson Central Terminal (WCTs) and Goldberger Terminals (GCT). Pacing beats created by a cardiovascular pacemaker can be recognized inside an ECG signal. The ADS129x likewise incorporates barely any highlights like low force utilization for example 0.75 m Watt, for inside producing signals for test an adaptable information multiplexer for every channel is appended, temperature and lead off recognition. Voltage scope of 1.65-5.25V on advanced side and 2.7-5.25V on simple side is utilized for chip working. In ESP8266 chip Tensilica Extensa, a microcontroller is utilized. What makes a DAQ practical is its little size and minimal effort. Here we have utilized 12E form out of the different adaptations present. For correspondence with ADS129x and 17 GPIO's universally useful information yield (GPIO) pins are utilized which are effectively accessible. The ESP8266 Arduino IDE is utilized for programming which bolsters all the Arduino libraries. Android telephone remotely gets the ECG information that is gotten at the microcontroller. For lossless remote transmission of information Bluetooth is utilized. For Bluetooth transmission, a Bluetooth module, for transmitting information by means of Bluetooth is utilized. RS-232 interfacing is utilized for associating the ESP8266 microcontroller and the Bluetooth module. Cell phone progressively shows 8 leads after the information is gotten from the obtaining framework by means of advanced mobile phone. Utilizing 3G/4G portable web joins (3G/4G) on the telephone information is spilled on web stage by means of advanced cell.

CHAPTER 4

HARDWARE DESCRIPTION

4.1 ARDUINO

Arduino comprises of a physical circuit board that can be programmed, commonly known as microcontroller, it is used to upload and write the computer code on the physical board and it runs on computer. The popularity of the Arduino platform seems to have increased among people who have just started trying their hand on electronics, which is in turn a good practice to do. Unlike other programmable circuit boards, an extra programmer in the form of hardware is not required by the Arduino for loading a new code, instead a USB cable is used. Using simplified version of C++ make it easy for learners to learn how to program on it. Functions of the microcontroller are broken into packages that are more easily accessible by the form factor that is provided by the Arduino.

There are various kinds of Arduino boards few of them are shown below:



FIG 4.1: ARDUINO NANO



FIG 4.2: ARDUINO MEGA2560

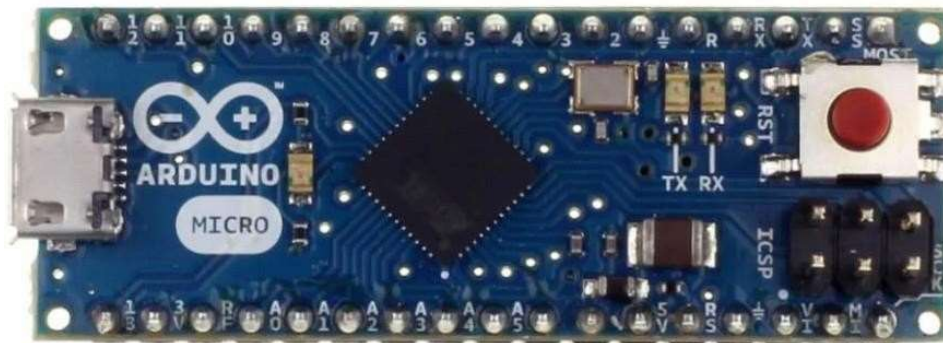


FIG 4.3: ARDUINO MICRO

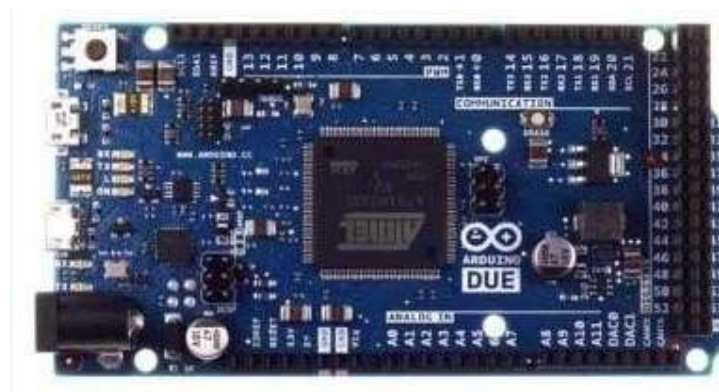


FIG 4.4: ARDUINO DUE



FIG 4.5: ARDUINO UNO

4.2 ARDUINO UNO

Based on removable, dual-in line package (DIP) ATmega328 AVR microcontroller, the Arduino Uno R3 is a microcontroller board. The information/yield pins present in it are 20 in number, out of which 6 can be utilized as PWM yields and 6 can be utilized as simple data sources. Arduino computer program which is easy to use are used to load programs. What makes it very easy to start working with the embedded electronics is the extensive support community which Arduino has. The third and latest version of Arduino Uno present is R3.

In view of ATmega328 the Arduino Uno is a microcontroller board which has computerized input/yield sticks out of which 6 can be utilized as PWM yields and 6 can be utilized as simple data sources separated from this. It likewise has a resonator which is of 16 MHz, a USB association, an in-circuit framework programming (ICSP) header, a force jack, and a reset button. Everything which is or can be required to help the microcontroller is available in it, just there is requirement for a force flexibly which can be satisfied by basically associating it to a PC with a USB link or with an AC-to-DC connector or a battery to begin.

FTDI USB-to-serial driver chip is not used in Arduino Uno which differentiates it from all the other boards. Instead, a USB-to-serial converter which is formed by programming an ATmega16U2 is used. An USB bootloader of its own is present in the microcontroller which gives provision to advance users to reprogram it.

What makes Arduino an incredible starting stage for inserted gadgets is a huge help network and a restrictive arrangement of help libraries and equipment add-on "shields" (for example it very well, may be effectively made remote by utilizing Weixel shield). To make fun early on ventures a Spark Fun Inventor's Kit is likewise offered which incorporates an Arduino Uno and furthermore arrangement of segments with it (for example breadboard, sensors, jumper wires, and LEDs).

The 3rd revision of the Uno (R3) has several changes which are listed below:

- a. The USB controller chip ATmega8U2 (8K streak) is changed to ATmega16U2 (16K glimmer) while this change does not make the blaze or RAM accessible to portrays in expanded sum.
- b. Duplicates of previous pins are added which are three in number. The I2C pins (A4, A5) are brought out on the side of the board near AREF. A duplicate of the 5 V pin is also present next to the reset pin and called IOREF.
- c. The reset button is currently brought close to the USB connector for making it increasingly available when a shield is utilized. The 14 computerized input/output pins can be utilized as information or output sticks by utilizing pin Mode(), digital Read() and digital Write() works in Arduino programming. Each pin

works at 5V and can give or get a limit of 40mA current, and has an inner draw up resistor of 20-50 K Ohms which are disengaged as a matter of course. Out of these 14 pins, a few pins have explicit capacities as recorded underneath:

Serial Pins 0 (Rx) and 1 (Tx): Rx and Tx pins are utilized to get and transmit TTL sequential information. They are associated with the relating ATmega328P USB to TTL sequential chip.

External Interrupt Pins 2 and 3: These pins can be arranged to trigger a hinder on a low worth, a rising or falling edge, or an adjustment in esteem.

PWM Pins 3, 5, 6, 9 and 11: These pins give a 8-piece PWM yield by utilizing analogWrite() work.

SPI Pins 10 (SS), 11 (MOSI), 12 (MISO) and 13 (SCK): These pins are utilized for SPI correspondence.

In-assembled LED Pin 13: This pin is associated with an implicit LED, when pin 13 is HIGH - LED is on and when pin 13 is LOW, it's off.

Alongside 14 Digital pins, there are 6 simple information sticks, every one of which gives 10 bits of goals, for example 1024 distinct qualities. They measure from 0 to 5 volts however this cut-off can be expanded by utilizing AREF pin with simple Reference () work. Simple pin 4 (SDA) and pin 5 (SCA) likewise utilized for TWI communication utilizing Wire library.

Arduino Uno has a few different pins as clarified underneath:

AREF: Used to give reference voltage to simple contributions with analogReference() work.

Reset Pin: Making this pin LOW, resets the microcontroller

4.2.1 PIN DIAGRAM:

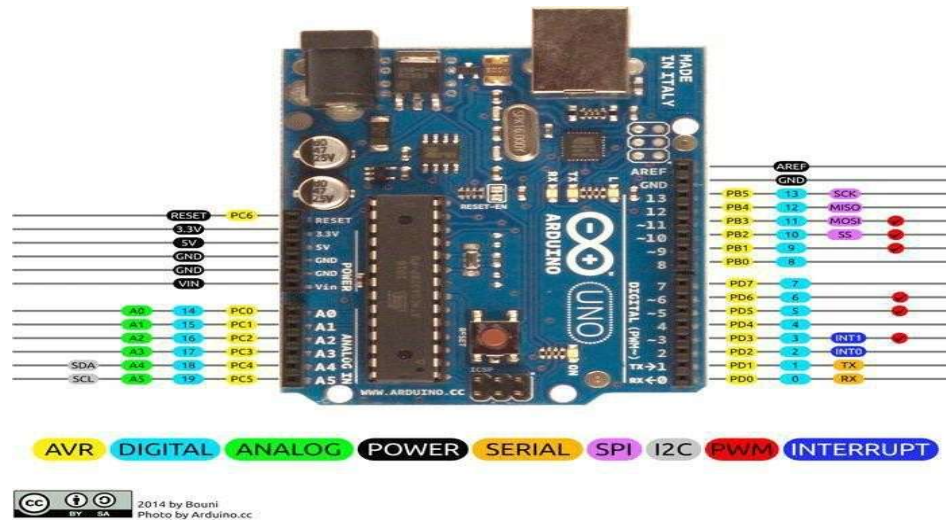


FIG 4.6: PIN DIAGRAM OF ARDUINO UNO

Microcontroller	ATmega328P
Operation Voltage	5V
Input Voltage (recommended)	7-12V
Input Voltage (limit)	6-20V
Digital I/O Pins	14 (of which 6 provide PWM output)
PWM Digital I/O Pins	6
Analog Input Pins	6
DC Current per I/O Pin	20mA
DC Current for 3.3V	50mA
Flash Memory	32KB (ATmega328P) of which 0.5KB used by bootloader
SRAM	2KB (ATmega328P)
EEPROM	1KB (ATmega328P)
Clock Speed	16 MHz
LED_BUILTIN	13
Length	68.6 mm
Width	53.4 mm
Weight	25 g

TABLE 4.1: TECHNICAL SPECIFICATIONS OF AURDINO

Pin Category	Pin Name	Details
Power	Vin, 3.3V, 5V, GND	Vin: Input voltage to Arduino when using an external power source. 3.3V: 3.3V supply generated by on-board voltage regulator. Maximum current draw is 50mA. 5V: Regulated power supply used to power microcontroller and other components on the board. GND: Ground pins
Reset	Reset	Resets the microcontroller.
Analog Pins	A0 - A5	Used to provide analog input in the range of 0-5V
Input Output pins	Digital Pins 0-13	Can be used as input or output pins.
Serial	0(Rx), 1(Tx)	Used to receive and transmit TTL serial data.
External Interrupts	2, 3	To trigger an interrupt
PWM	3, 5, 6, 9, 11	Provides 8-bit PWM output.
SPI	10 (SS), 11 (MOSI), 12 (MISO) and 13 (SCK)	Used for SPI communication.
Inbuilt LED	13	To turn on the inbuilt LED.
TWI	A4 (SDA), A5(SCA)	Used for TWI communication.
AREF	AREF	To provide reference voltage for input voltage.

TABLE 4.1: PIN DESCRIPTION OF ARDUINO

4.3 16 x 2 LCD MODULE

An electronic presentation module which utilizes fluid gem to deliver an obvious picture is called LCD. Simple to make circuits utilizes the extremely fundamental module of the LCD that is 16X2 LCD show. The 16×2 presentation has 2 lines and show. In this LCD each character is shown in a 5×7-pixel grid structure in this LCD.

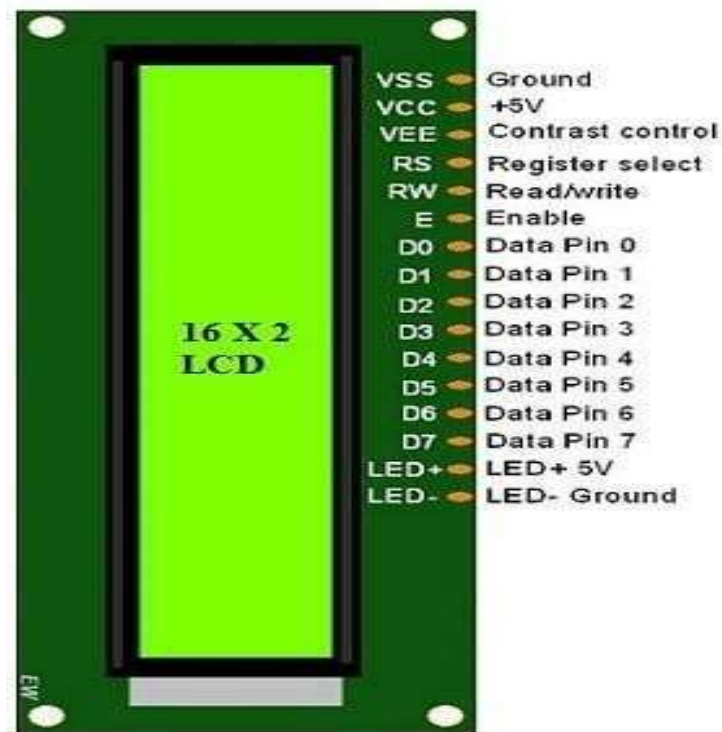


Fig:4.7: 16x2 lcd display pin diagram

1. For sending data through the microcontroller to the display data pins are used.
2. Supply voltage is varied from 0V to 5V in order to control the contrast of the display via VEE port.
3. Between command or data register mode the register select pin toggles.

4. Data mode=0, and command mode=1 is obtained by the microcontroller pin.
5. High voltage is required by the enable pin to enable read/write process.
6. Ground pin of the microcontroller is connected to the ground pin of the LCD.

Pin No	Function	Name
1	Ground (0V)	Ground
2	Supply Voltage; 5V (4.7V – 5.3V)	VCC
3	Contrast adjustment; the best way is to use a variable resistor such as a potentiometer. The output of the potentiometer is connected to this pin. Rotate the potentiometer knob forward and backwards to adjust the LCD contrast.	VO / VEE
4	Selects command register when low; and data register when high	RS (Register Select)
5	Low to write to the register; High to read from the register	Read/Write
6	Send data to data pins when a high to low pulse is given; Extra voltage push is required to execute the instruction and EN(enable) signal is used for this purpose. Usually, we make it en=0 and when we want to execute the instruction we make it high en=1 for some milliseconds. After this we again make it ground that is, en=0.	Enable
7	8-bit data pins	DB0
8		DB1
9		DB2
10		DB3
11		DB4
12		DB5
13		DB6
14		DB7
15	Backlight VCC (5V)	Led+
16	Backlight Ground (0V)	Led-

TABLE 4.3: LCD PIN DESCRIPTION

4.3.1 FEATURES OF 16 X 2LCD

Features and properties of this LCD are described as follows: -

- i. 4.7V to 5.3V is the voltage range required to operate this LCD screen.
16-characters can be produced by the rows of display.
- ii. There is no backlight and current utilization is of 1mA and has no backlight.
- iii. Has a pixel box of 5X8.
- iv. It has both alphabets and numbers making it an alphanumeric LCD. 2 variants in form of blue and green backlight are available.
- v. A few custom generated characters can also be displayed on it.

RS (Register select): There are two registers in 16X2 LCD which are named as order and information. For changing starting with one register then onto the next register the register select is utilized. RS=0 is utilized for order register, though RS=1 is utilized for information register.

Command Register: Command instructions that are given to the LCD are stored in the command registers. For carrying out a predefined task the instruction which is given is called command. Examples include initialization, clearing of screen, setting cursor position, display control etc. Processing for commands happens in the command.

Data Register: Information that will be shown on the LCD is put away in information registers. The shown ASCII estimation of the character on LCD is information. Information is handled in information enlists as it is sent to the LCD. Information register is chosen when RS=1.

4.3.2 DISPLAY CUSTOM CHARACTERS ON 16X2 LCD.

It's not hard to create custom character on a LCD. Exclusively produced irregular access memory (CG-RAM) and the controller of chip are required as it were. Hitachi HD4478 controller is contained in the majority of LCDs. CG-RAM fills in as a primary segment in producing custom characters.

Sr. No.	Hex Code	Command to LCD instruction Register
1	01	Clear display Screen
2	02	Return home
3	04	Decrement Cursor (shift cursor to left)
4	06	Increment Cursor (shift cursor to right)
5	05	Shift display right
6	07	Shift display left
7	08	Display off, cursor off
8	0A	Display off, cursor on
9	0C	Display on, cursor off
10	0E	Display on, cursor blinking
11	0F	Display on, cursor blinking
12	10	Shift cursor position to left
13	14	Shift cursor position to right
14	18	Shift the entire display to left
15	1C	Shift the entire display to right
16	80	Force cursor to beginning (1st line)

TABLE 4.4: COMMAND CODES FOR LCD

4.4 JUMPER WIRES (Male To Male)

The jumper wires play a very significant role for making breadboard connections between the components required without requirement of any soldering and hence makes it easy to change the circuitry whenever required. Only male to male jumper wires are required which can be identified as they are pointed at both the ends.

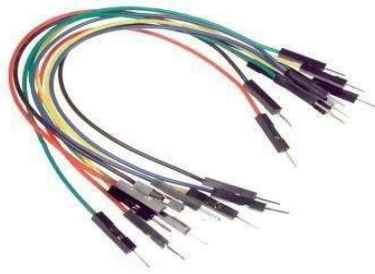


FIG 4.8: JUMPER WIRE

4.4.1 POTENTIOMETER

Variable resistors are known as Potentiometers. Different values of resistance is provided by it by varying the knob which is present on the upper portion of its head as per required. It can be used only for circuits that requires less current and hence have a power rating of 0.3 Watts (W).

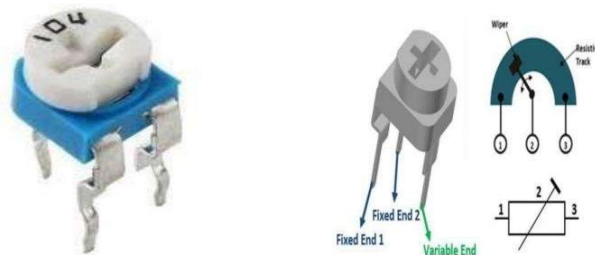


FIG 4.9: POTENTIOMETER

4.5 MICROCONTROLLER (ESP8266)

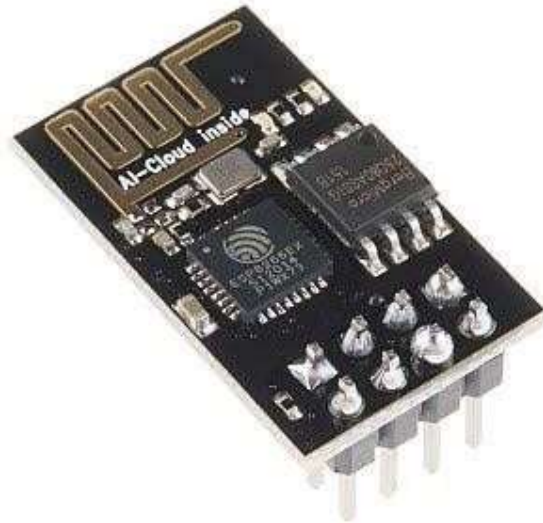


FIG 4.10: ESP8266 MICROCONTROLLER

The ESP8266 is a practical Wi-Fi microchip, with abilities of full TCP/IP stack and microcontroller. In ESP8266 chip Tensilica Xtensa, a microcontroller is utilized. What makes it DAQ financially savvy is its little size and minimal effort. Here we have utilized 12E form out of the different adaptations present. For correspondence with ADS129x and 17 GPIO's broadly useful info yield (GPIO) pins are utilized which are effectively accessible. The ESP8266 Arduino IDE is utilized for programming which underpins all the Arduino libraries.

Android telephone remotely gets the ECG information that is gotten at the microcontroller. For lossless remote transmission of information Bluetooth is utilized (Fig 4). For transmission through Bluetooth, A Bluetooth module, for transmitting information by means of Bluetooth is utilized. RS-232 interfacing is utilized for associating the ESP8266 microcontroller and the Bluetooth module. Cell phone progressively shows 8 leads after the information is gotten from the procurement framework by means of PDA.

Utilizing 3G/4G versatile web joins (3G/4G) on the telephone information is spilled on web stage by means of advanced cell. The gained information plotted utilizing MATLAB.

Espressif Systems' Smart Connectivity Platform (ESCP) of elite remote SOCs, for portable stage creators, gives amazing capacity to insert Wi-Fi abilities inside different frameworks, at the most reduced expense with the best usefulness.

4.6 DATASHEET ESP8266

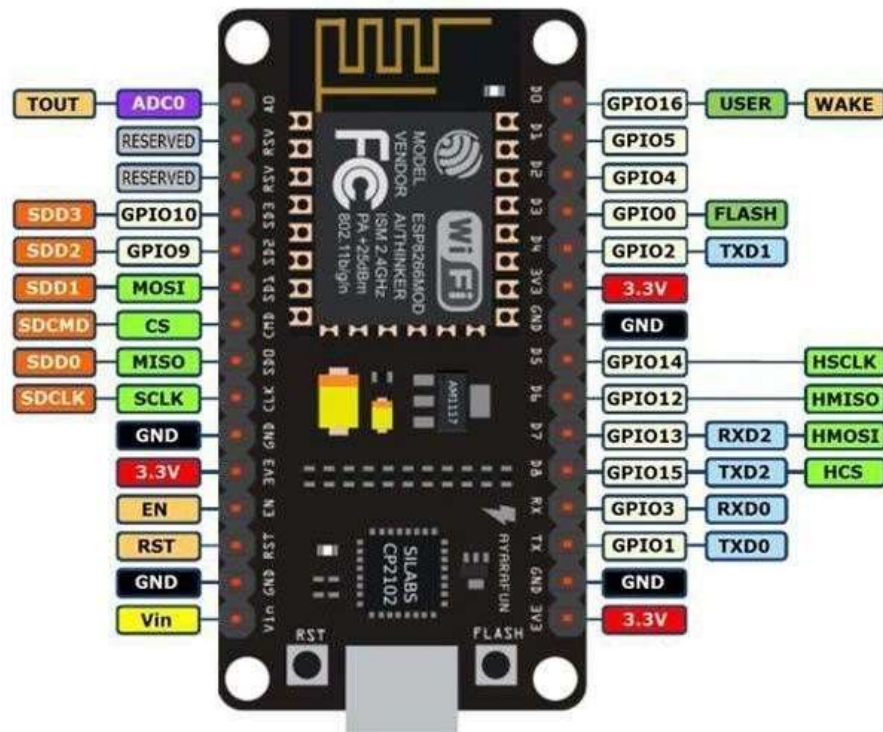


FIG 4.11: ESP8288 DATASHEET

4.6.1 BLOCK DIAGRAM (ESP8266):

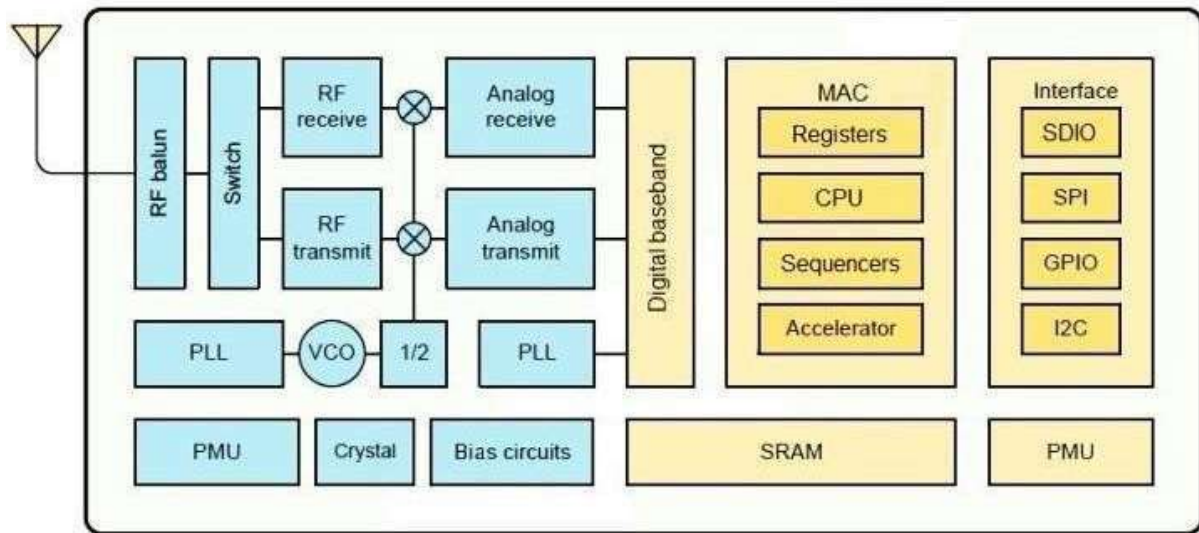


FIG 4.12: BLOCK DIAGRAM OF ESP8266

CHAPTER 5

SOFTWARE DESCRIPTION

5.1 INTRODUCTION

The functions from C/C++ are drafted in a platform application which is used by The Arduino Integrated Development Environment. These languages are used by boards that are Arduino compatible to run as well as write the programs.

In order to support the languages C/C++, codes with special rules are used by the Arduino. A software library from the wiring project in order to provide same input and output procedure is supplied by the Arduino IDE. Two basic functions are required by the user written codes that are it should always be implemented in a form of recapitulate language. C/C++ compilers are available on many platforms as it is provided by many merchants, including the Free Software Foundation, Microsoft, Intel, Oracle, and IBM.

JAVA:

Java is another object-oriented programming language based on class and objects and seems to have less dependency on implementations. It allows all the Java codes which are written and once compiled by the application developers can be run or executed anywhere without further need of compiling the code, on any Java supported platform. Irrespective of the architecture of the computer byte codes that are generated by compiling the Java application can be run on any JAVA virtual machine. C/C++ has more offices when contrasted with Java, sentence structure of C and C++ being like it however. The most well-known programming language as per GitHub and for customer server web applications is Java.

C/C++ vs. JAVA

In our project we have used Arduino as the executing platform, since for our project Arduino is the best suited platform. Since Arduino uses C/C++ as it is the most flexible known language. Its homogenous nature with the Arduino ecosystem enables the smooth usage of the code and documentation that already exist. Using C/C++ program directly and compiler without the Arduino IDE and libraries is more suited usage of files directly from the command line, as well as optionally programming of some parts in assembler should be the need. Arduino bootloader running on the board required may or may not be used to work with this, with the help of ICSP in order to program the chip directly. As a result of this extra memory space and less complexity is given to the application, otherwise bootloader consumes the maximum part.

WHY C/C++

C/C++ has Arduino language as its subset and for ultra-low level code assembly can also be used. When someone intent to program the Arduino that means programming in C/C++. It doesn't make any difference if Arduino is programmed in C/C++ itself or not because C/C++ is used in the microcontroller within the board. For example, AtMega328p microcontroller is present in the Arduino Uno and Performance is of utmost importance in writing codes for microcontroller. Due to this reason programming languages C/C++ are used, since they are strong and fast which makes them one of the most powerful programming languages one can search for easily. Due to their quick and stable nature, they are best suited for coding microcontrollers. A compiler known as avr-g++ is used to change codes into object file. Then, a program known as avrdude is used by the Arduino microcontroller function to upload the program into it, in order to state the main program loop, which is further compiled into a program that is executable with the help of a program called main(). The program is then employed by the Arduino IDE with intention to produce a text file in hexadecimal encoding from the conversion of executable code,

and then a loader program is used to load the hexadecimal encoded text file into the Arduino-board.

C/C++:

C++ or C with classes is a programming language that is an augmentation of the programming language called C. C++ has essentially extended after some time, and furthermore incorporates some item arranged capacities and highlights which encourages for control of low-level memory. It is executed as a summarize language, and its compilers are made accessible by numerous dealers including the Free Software Foundation, Microsoft, Intel, Oracle, and IBM, making it accessible on different stages.

5.2 ARDUINO UNO

Arduino, software based on prototype platform and hardware that is extremely easy to use. Computer code is written and uploaded on the physical board which further includes a circuit board commonly known as microcontroller which can be programmed based on requirement and the software called Arduino IDE. Micro controller functions are broken into the packages that are more easily accessible, by the standard form factor provided by the Arduino.

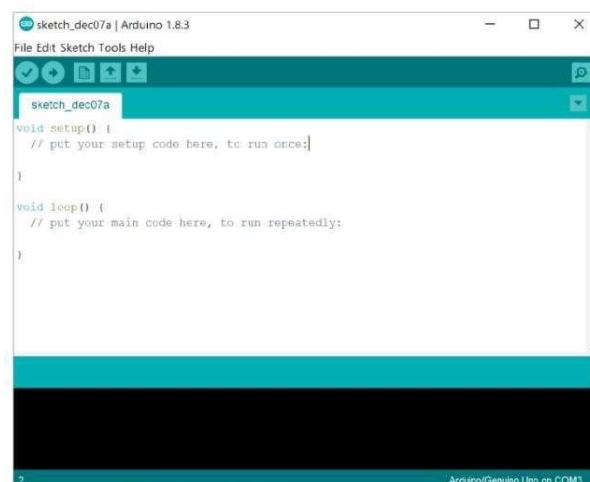


FIG 5.1: ARDUINO INTERFACE

5.2.1 FEATURES OF ARDUINO: -

1. Analogue or digital input signals can be read and output can be produced by the Arduino boards with the help of different sensors. For example, connecting to the cloud and motor activation, on/off actions on an LED, and various others.
2. Functions of board can be controlled through Arduino IDE with the help of set of instructions send to the microcontroller.
3. Unlike other programmable circuit boards, an extra programmer in the form of hardware is not required by the Arduino for loading a new code, instead a USB cable is used.
4. Using simplified version of C++ make it easy for learners to learn how to program on it.
5. Functions of the microcontroller are broken into packages that are more easily accessible by the form factor that is provided by the Arduino.

5.3 STRUCTURE:

There are three basic parts of the Arduino program that is **Structure**, **Values** which in turn consist of variables and constants, and **Functions**

There are two main functions of software structure –

Setup()function

Loop()function

SYNTAX OF STRUCTURE OF SOFTWARE:

```
Void setup () {}
```

PURPOSE - At the point when a program begins the arrangement () work is called. Its capacities incorporate introduction of factors, pin modes, libraries utilization, and so forth program arrangement capacity will pursue once each reset or catalyst.

OUTPUT

S.No	ECG	Heartrate	Risk %
1	1024(0)	0	0
2	731	82	51.2
3	619	84	42.5
4	234	69	31.8
5	914	71	50.0

CONSOLE WINDOW



SERIAL PLOTTER



PURPOSE - After the formation of arrangement () work which in states and sets the underlying qualities, the circle () work circles continuously, which permits program to additionally react and change. It is utilized to control Arduino board effectively.

5.4 DATATYPES

In C data types is referred as a big system used for variable declaration or for declaring the functions of different types. Function of calculating how much space is or will be occupied in the storage is governed by the variable data type, because as per the data type used compiler will know about the space.

Arduino programming uses the following data types: -

Void-Void is a keyword or data type that is used for declaring functions. It is called void as it does not return any value to the function through which it is called.

Boolean-It is a data type that uses only one byte of memory and stores either true or false one at a time.

Char-It is a data type that uses one byte of memory. Multiple characters string is written in double quotes, for example: "ANU", whereas single character string is written in single quotes for example: 'A'. Character strings can be written both ways.

Unsigned char-It is a data type with one byte of memory and can take numbers from 0 to 255. It is an unsigned type of data type.

Int-A two-byte data that is 16 bits can be stored in an int variable. It's a primary data type whose function includes storage of numbers.

Word-It is used to store a 16-bit number which is unsigned on the other boards which are based on AT Mega.

Long-It is a data type that stores 32 bits and its variables have extended size variables for storing numbers.

Short-It is a 16-bit data-type which stores a 16-bit (2-Byte) values on all At Mega and Arm based Arduinos

5.5 MATLAB:

MATLAB is a multi-worldview numerical processing condition and exclusive programming language created by MathWorks. MATLAB permits framework controls, plotting of capacities and information, usage of calculations, production of UIs, and interfacing with programs written in different dialects.

Although MATLAB is expected principally for numerical processing, a discretionary tool stash utilizes the MuPAD representative motor permitting access to emblematic figuring capacities. An extra bundle, Simulink, includes graphical multi-space recreation and model-based plan for dynamic and implanted frameworks.

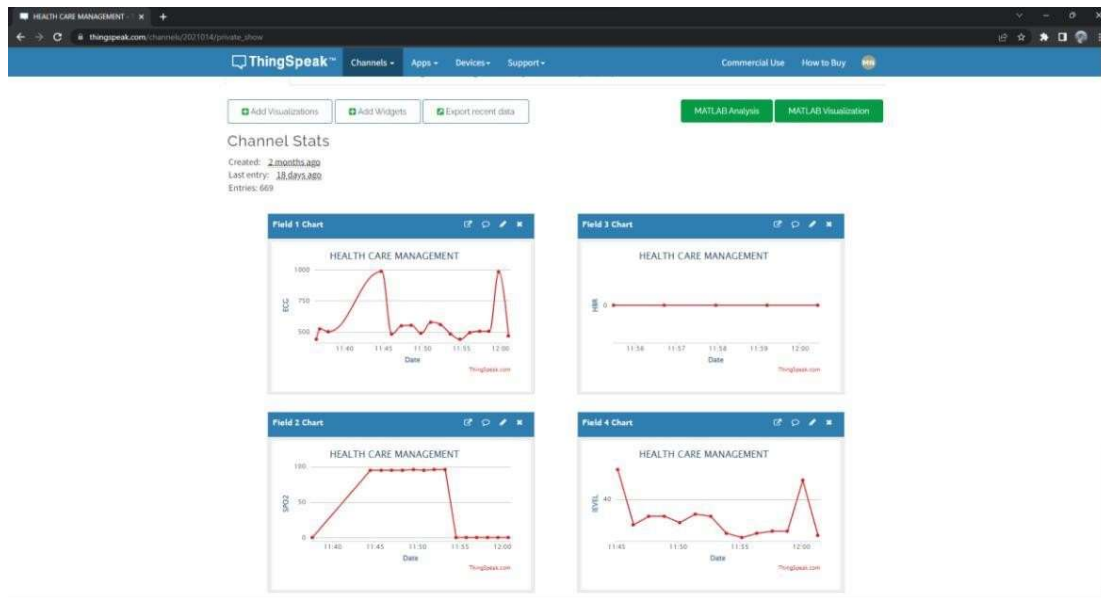


FIG 5.2: MATLAB INTERFACE

MATLAB programming language is utilized for building a MATLAB application. The use of "Order Window" in MATLAB is engaged with regular use of MATLAB application as an intuitive scientific shell or executing content documents containing MATLAB code.

SYNTAX VARIABLES

Task administrator is utilized to characterize factors in MATLAB, =. MATLAB has certainly changed over sorts consequently is an occasionally composed programming language. Aside from the explanation that factors are treated as emblematic items and their sort can be changed, in rest cases factors are allotted without type affirmation and thus considered as derived composed language.

VECTORS AND MATRICES

Vectors and matrices are the simple array defined using the colon syntax: initial: increment: terminator.

STRUCTURES

Structure data types are supported by MATLAB.^[28] Name "structure array" is more accurate since all variables in MATLAB are arrays, and each array element has the same field names. Dynamic field names are supported by MATLAB.

FUNCTIONS

Name of the first function in MATLAB file should be same as the MATLAB file when created. Function names beginning with an alphabetic character are considered valid functions, and letters, numbers, or underscores can be included while Variables and functions being case sensitive.

5.5.1 CLASSES AND OBJECT-ORIENTED PROGRAMMING

Classes, inheritance, virtual dispatch, bundles, cruise by-esteem semantics, and cruise by- reference semantics which are incorporated by Object-arranged writing computer programs are additionally upheld by MATLAB. The Syntax and calling shows in MATLAB are not quite the same as different dialects. In MATLAB on the off chance that the super-class is available as handle, at that point it is known as reference class and if it does not have it, at that point it is known as worth classes.

INTERFACING WITH OTHER LANGUAGES:

Functions and subroutines written in C or FORTRAN programming dialects can be called by MATLAB. By making wrapper work MATLAB information types are permitted to be passed and returned, and furthermore by aggregating the wrapper work the MATLAB executables documents

otherwise called MEX records which are object documents can be stacked. Two- route interfacing with Python was included since 2014.

MATLAB can directly call the libraries written in various languages like: Perl, Java, ActiveX, or .NET and also in form of wrapper around libraries of java or ActiveX, XML or SQL support few MATLAB libraries are implemented. Despite being complicated MATLAB can be called from Java with the help of MATLAB toolbox which is separately provided by MathWorks, one can easily purchase it, or using JMI which is an undocumented mechanism.

CHAPTER 6

CONCLUSION AND FUTURE SCOPE

6.1 CONCLUSION

Utilizing remote innovation limits work area mess and repeats the solid market for innovation that takes into consideration straightforwardness in medical clinics and inside the house. A remote ECG sensor which shows its yield on PC utilizing Lab see. A gadget which permits effective checking for data of heart condition that is ongoing, persistent, and exact, remotely.

6.2 FUTURE SCOPE

1. Cloth fitted capacitive electrodes can be used in place of ECG electrodes that are directly worn on body using gel. For sharing the information for administering the collected data Wi-Fi can be used through which phone can be directly connected to internet via android app dedicated for the same purpose.
2. In order to build Ultra-low power system, low power wireless protocol is used which further saves power and increases battery.
3. In future solar powered ECG electrodes can be used.
4. Very small electrodes can be built in future.

REFERENCES

- [1] K. Zhang, W. Ling, Health monitoring of human multiple physiological parameters based on wireless remote medical system, *IEEE Access* 8 (2020)
- [2] A.A. Silverio, A.A. Silverio, A.M. Remot, Low-cost elderly healthcare monitoring system, *J. Phys.: Conf. Ser.* 1529 (3) (2020).
- [3] M. Al-Khafajiy et al., Remote health monitoring of elderly through wearable sensors, *Multimed. Tools Appl.* 78 (17) (2019).
- [4] G. Mois, S. Folea, T. Sanislav, Analysis of three IoT-based wireless sensors for environmental monitoring, *IEEE Trans. Instrum. Meas.* 66 (8) (2017).
- [5] L. Yu, W.M. Chan, Y. Zhao, K.-L. Tsui, Personalized health monitoring system of elderly wellness at the community level in Hong Kong, *IEEE Access* 6 (2018).
- [6] M. Manas, A. Sinha, S. Sharma, M.R. Mahboob, A novel approach for IoT based wearable health monitoring and messaging system, *J. Ambient Intell. Humaniz. Comput.* 10 (7) (2019).
- [7] M.M. Islam, A. Rahaman, M.R. Islam, Development of smart healthcare monitoring system in IoT environment, *SN Comput. Sci.* 1(3) (2020).
- [8] D. Misra, G. Das, D. Das, An IoT based building health monitoring system supported by cloud.
- [9] J. Wan et al., Wearable IoT enabled real-time health monitoring system, *EURASIP J. Wirel. Commun. Netw.* 2018 (1).

- [10] J. Gómez, B. Oviedo, E. Zhuma, Patient monitoring system based on internet of things, *Procedia Comput. Sci.* 83 (2016).
- [11] M. Hosseinzadeh, et al., An elderly health monitoring system based on biological and behavioural indicators in internet of things, *J. Ambient Intell. Humanize. Comput.* (2020) 1-11.
- [12] M. Talal, A.A. Zaidan, B.B. Zaidan, A.S. Albahri, A.H. Alamoodi, O.S. Albahri, M.A.Alsalem, C.K. Lim, K.L. Tan, W.L. Shir, K.I. Mohammed, Smart home-based IoT for real-time and secure remote health monitoring of triage and priority system using body sensors: multi-driven systematic review, *J. Med. Syst.* 43
- [13] W. Zhang, M. Kumar, J. Yu, J. Yang, Medical long-distance monitoring system based on internet of things, *EURASIP J. Wirel. Commun. Netw.* 2018 (1) (2018) 1-8.
- [14] M.M. Ali, S. Haxha, M.M. Alam, C. Nwibor, M. Sakel, Design of Internet of Things (IoT) and android based low-cost health monitoring embedded system wearable sensor for measuring SpO₂, heart rate and body temperature simultaneously, *Wirel. Pers. Commun.* 111 (4) (2020) 2449-2463.
- [15] M. Fotouhi, M. Bayat, A.K. Das, H.A.N. Far, S.M. Pournaghi, M.A. Doostari, A lightweight and secure two-factor authentication scheme for wireless body area networks in health-care IoT, *Comput. Netw.* (2020) 107333.
- [16] S. Din, A. Paul, Smart health monitoring and management system: toward autonomous wearable sensing for internet of things using big data analytics, *Futur. Gener. Comput. Syst.* 91 (2019) 611-619.

- I
- [17] A. Glória, F. Cercas, N. Souto, Design and implementation of an IoT gateway to create smart environments, Des. Implement. IoT Gatew. Creat. Smart Environ.109 (2017) 568-575.
 - [18] J. Kim, A.S. Campbell, B.-F. de Ávila, J. Wang, Wearable biosensors for healthcare monitoring, Nat. Biotechnol. 37 (4) (2019) 389-406.
 - [19] C.U. Devi, T.V. Prasad, K. Jyotsna, M. Madhavi, IoT based health care monitoring system using wireless sensor networks, Indian J. Public Heal. Res. Dev. 9 (12) (2018) 1579-1583.
 - [20] P. Verma, S.K. Sood, S. Kalra, Cloud-centric IoT based student healthcare Monitoring framework, J. Ambient Intell. Humaniz. Comput.9 (5) (2018)1293-1309.

APPENDIX

A. SOURCE CODE

```
#include <ESP8266WiFi.h>;
#include <WiFiClient.h>;
#include <ThingSpeak.h>;
WiFiClient client;
const char* ssid = "IOT"; //Your Network SSID
const char* password = "IOT@123456789" ; //Your Network Password
unsigned long myChannelNumber = 2021014; //Your Channel Number
        (Without Brackets)
const char * myWriteAPIKey = "BS81KZV5UDZ3WDNJ"; //Your Write API Key
int ECG_data; int spo;
void setup()
{
  Serial.begin(9600);
  WiFi.begin(ssid, password);
  ThingSpeak.begin(client);
  pinMode(16,INPUT);
  pinMode(14, INPUT);
  pinMode(12, INPUT);
}
void loop()
{
  ECG_data = analogRead(A0);
  if((digitalRead(10) == 1)|| (digitalRead(11) == 1)){
    Serial.println("!");
  }
  else
  {
    Serial.println(analogRead(A0));
  }
}
```



```
ThingSpeak.writeField(myChannelNumber, 1, ECG_data,
    myWriteAPIKey);delay(2000);
int rx=digitalRead(16);
if(rx==1)
{
    spo=digitalRead(16);Serial.print("spo:");Serial.println(spo);
    ThingSpeak.writeField(myChannelNumber,2,spo,
        myWriteAPIKey);delay(2000);

    int hbr=digitalRead(16);Serial.print("hbr:");Serial.println(hbr);
    ThingSpeak.writeField(myChannelNumber,3,hbr,
        myWriteAPIKey);delay(2000);
}
else
{
    spo=0;Serial.print("spo:");Serial.println(spo);
    ThingSpeak.writeField(myChannelNumber,2,spo,
        myWriteAPIKey);delay(2000);

    int hbr=0;Serial.print("hbr:");Serial.println(hbr);
    ThingSpeak.writeField(myChannelNumber,3,hbr,
        myWriteAPIKey);delay(2000);
}
int adx= ECG_data+spo;adx=adx/20;
ThingSpeak.writeField(myChannelNumber,4,adx,
    myWriteAPIKey);delay(2000);

}
```

