

PROFESSIONAL TRAINING REPORT

at

Sathyabama Institute of Science and Technology

(Deemed to be University)

Submitted in partial fulfilment of the requirements for the award of

Bachelor of Engineering Degree in

Electrical and Electronics Engineering

By

Udayachandran.R (39140707)



DEPARTMENT OF ELECTRICAL AND ELECTRONICS

SCHOOL OF ELECTRICAL AND ELECTRONICS

SATHYABAMA INSTITUTE OF SCIENCE AND TECHNOLOGY

JEPPIAAR NAGAR, RAJIV GANDHI SALAI,

CHENNAI – 600119. TAMILNADU.

JULY 2020

VATIO ENERGY INDIA PRIVATE LIMITED

VATIO Energy is an efficiency-driven entrepreneurship inspired by a vision of creating a greener tomorrow by harnessing the power of solar energy. In doing so, we seek to improve our customers' daily lives by significantly reducing your electricity bills.

VATIO has provided solar panels and inverters to large corporations and government agencies, and has also helped thousands of individual homeowners with tailor-made solar and energy systems.

VATIO® Certificate OF INDUSTRY INTERNSHIP



This is to certify that

UDAYACHANDRAN.R

Studying **3rd Year, B.E, EEE** in **SATHYABAMA INSTITUTE OF SCIENCE AND TECHNOLOGY**

has successfully completed the Industry Internship Programme at VATIO Energy India Pvt Ltd, Chennai through Online from 21st July to 05th August 2021 in the area of
"Solar Photovoltaic system & its Design Practices"

Best wishes from VATIO Energy for future endeavors !

A handwritten signature in black ink, appearing to read 'G. Rajaganesan'.

G.Rajaganesan, Director - Technical
VATIO Energy India Pvt Ltd.



05th August 2021

Date

1.SOLAR ENERGY

1.a.What is solar energy?

Solar energy is radiant light and heat from the Sun that is harnessed using a range of ever-evolving technologies such as solar heating, photovoltaics, solar thermal energy, solar architecture, molten salt power plants and artificial photosynthesis.



1.b.Why we are going for solar energy?

Solar Energy versus Wind

Despite wind technology being in the market for a long time, it has experienced some issues. The initial power gathered from wind is less expensive to produce, but wind turbines require much more maintenance than photovoltaic cells. Also, wind generating plants are set up at distant locations, with little or no access to the actual consumer. The discoms (distribution companies), for the fear of losing business, have levied huge wheeling charges over the years, which has made the proposition unviable in recent times.

They are also more disruptive than their solar counterpart, since they are prone to making lots of noise.

Solar Energy versus Hydro

Hydroelectricity, though effective, is generally supplied through the use of large dams which also mean initial installation cost will be very high. Also, building a dam has the ability to alter an entire ecosystem. Hydro plants often change the natural flow of the waterways they take over, creating new lakes and reducing water flow downstream. These installations can also affect wildlife in the area, blocking fish migration and altering habitats.

Photovoltaic panels, on the other hand, do not change the environment and are small in comparison to dams. One of the advantages of solar power is its versatility. A land or roof installation can be set up in regions that many would think don't receive enough sunlight.

Solar Energy versus Biomass

Burning biomass to generate electricity has some appeal as biomass is renewable in some sense. However, the logistics and overall energy balance undermine this argument, as a lot of energy – mostly oil based – is required to harvest and move the crops to the power station.

The use of biomass, such as the burning of wood, waste, alcohol fumes, or landfill gases produces less waste energy than fossil fuels or coal.

Unfortunately, biomass creates volatile organic compounds like carbon monoxide and nitrogen oxides. On the positive side, its pollution is modest in comparison to traditional fuels. Photovoltaic cells prove superior again in that they create no emissions and do not require land that could be used for crops.

In addition, solar panels have efficiencies as high as 19%, meaning that much of the sun's energy is converted into electricity. The efficiency of biomass is much, much lower – perhaps less than 1%. Solar energy is at par with the grid tariffs for most commercial and industrial consumers in India. If you've been thinking about going solar, now is the time to make the change. Government financial incentives are still ripe for the picking, and you stand to gain a lot as one of the early adopters of solar energy. Adding solar power plant in your factory is an excellent project for several reasons: You'll save loads on electricity, you'll reduce your carbon footprint; and if you're installing in a remote location (such as a cabin), you'll have much less to worry about than

you would with a gasoline generator. You'll also support a growing industry, and in doing so, help contribute to the worldwide adoption of this wonderful new energy source.


2.SOLAR PV

2.a.Working Principle of Solar PV

Principle of solar energy: The Photovoltaic effect

Photovoltaic (PV) effect is the conversion of sunlight energy into electricity.

In a PV system, the PV cells exercise this effect. Semi-conducting materials in the PV cell are doped to form P-N structure as an internal electric field. The p-type (positive) silicon has the tendency to give up electrons and acquire holes while the n-type (negative) silicon accepts electrons. When sunlight hit the cell, the photons in light excite some of the electrons in the semiconductors to become electron-hole (negative-positive) pairs. Since there is an internal electric field, these pairs are induced to separate. As a consequence, the electrons move to the negative electrode while the holes move to the positive electrode. A conducting wire connects the negative electrode, the load, and the positive electrode in series to form a circuit. As a result, an electric current is generated to supply the external load. This is how PV effect works in a solar cell.

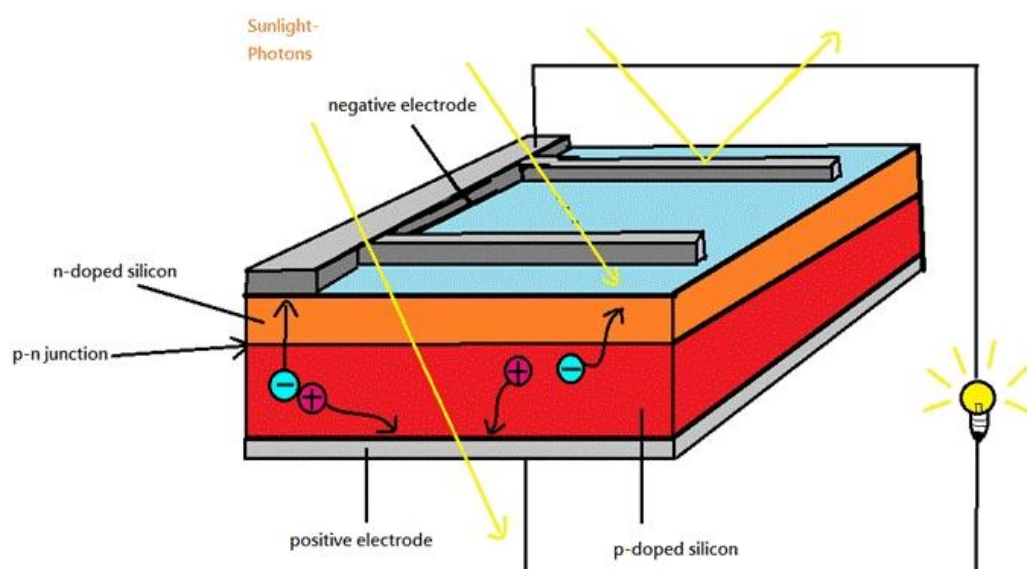

2.b.Solar PV Technology Basics

Solar cells, also called photovoltaic cells, convert sunlight directly into electricity.



Photovoltaics (often shortened as PV) gets its name from the process of converting light (photons) to electricity (voltage), which is called the photovoltaic effect. This phenomenon was first exploited in 1954 by scientists at Bell Laboratories who created a working solar cell made from silicon that generated an electric current when exposed to sunlight. Solar cells were soon being used to power space satellites and smaller items such as calculators and watches. Today, electricity from solar cells has become cost competitive in many regions and photovoltaic systems are being deployed at large scales to help power the electric grid.

Silicon Solar Cells

The vast majority of today's solar cells are made from silicon and offer both reasonable prices and good efficiency (the rate at which the solar cell converts sunlight into electricity). These cells are usually assembled into larger modules that can be installed on the roofs of residential or commercial buildings or deployed on ground-mounted racks to create huge, utility-scale systems.

Thin-Film Solar Cells

Another commonly used photovoltaic technology is known as thin-film solar cells because they are made from very thin layers of semiconductor material, such as cadmium telluride or copper indium gallium diselenide. The thickness of these cell layers is only a few micrometers—that is, several millionths of a meter.

Thin-film solar cells can be flexible and lightweight, making them ideal for portable applications—such as in a soldier’s backpack—or for use in other products like windows that generate electricity from the sun. Some types of thin-film solar cells also benefit from manufacturing techniques that require less energy and are easier to scale-up than the manufacturing techniques required by silicon solar cells.

III-V Solar Cells

A third type of photovoltaic technology is named after the elements that compose them. III-V solar cells are mainly constructed from elements in Group III—e.g., gallium and indium—and Group V—e.g., arsenic and antimony—of the periodic table. These solar cells are generally much more expensive to manufacture than other technologies. But they convert sunlight into electricity at much higher efficiencies. Because of this, these solar cells are often used on satellites, unmanned aerial vehicles, and other applications that require a high ratio of power-to-weight.

Next-Generation Solar Cells

Solar cell researchers at NREL and elsewhere are also pursuing many new photovoltaic technologies—such as solar cells made from organic materials, quantum dots, and hybrid organic-inorganic materials (also known as perovskites). These next-generation technologies may offer lower costs, greater ease of manufacture, or other benefits. Further research will see if these promises can be realized.

Reliability and Grid Integration Research

Photovoltaic research is more than just making a high-efficiency, low-cost solar cell. Homeowners and businesses must be confident that the solar panels they install will not degrade in performance and will continue to reliably generate electricity for many years. Utilities and government regulators want to know how to add solar PV systems to the electric grid without destabilizing the careful balancing act between electricity supply and demand.

Materials scientists, economic analysts, electrical engineers, and many others at NREL are working to address these concerns and ensure solar photovoltaics are a clean and reliable source of energy.

2.c.Solar Cell Types

A solar cell (also called photovoltaic cell or photoelectric cell) is a solid state electrical device that converts the energy of light directly into electricity by the photovoltaic effect, which is a physical and chemical phenomenon. It is a form of photoelectric cell, defined as a device whose electrical characteristics, such as current, voltage or resistance, vary when exposed to light.

The following are the different types of solar cells.

- Amorphous Silicon solar cell (a-Si)
- Bio-hybrid solar cell
- Cadmium telluride solar cell (Cd-Te)
- Concentrated PV cell (CVP and HCVP)
- Copper indium gallium selenide solar cells (CIGS)
- Crystalline silicon solar cell (c-Si)
- Float-zone silicon
- Dye-sensitized solar cell (DSSC)
- Gallium arsenide germanium solar cell (GaAs)
- Hybrid solar cell
- Luminescent solar concentrator cell (LSC)
- Micromorph (tandem-cell using a-Si/ μ c-Si)
- Monocrystalline solar cell (mono-Si)
- Multi-junction solar cell (MJ)
- Nanocrystal solar cell
- Organic solar cell (OPV)
- Perovskite solar cell
- Photo-electrochemical cell (PEC)
- Plasmonic solar cell
- Polycrystalline solar cell (multi-Si)
- Quantum dot solar cell
- Solid-state solar cell
- Thin-film solar cell (TFSC)
- Wafer solar cell, or wafer-based solar cell crystalline
- Non concentrated heterogeneous PV cell

2.d.Solar PV Array

If photovoltaic solar panels are made up of individual photovoltaic cells connected together, then the **Solar Photovoltaic Array**, also known simply as a Solar Array is a system made up of a group of solar panels connected together. A photovoltaic array is therefore multiple solar panels electrically wired together to form a much larger PV installation (PV system) called an array, and in general the larger the total surface area of the array, the more solar electricity it will produce.

A complete photovoltaic system uses a photovoltaic array as the main source for the generation of the electrical power supply. The amount of solar power produced by a single photovoltaic panel or module is not enough for general use. Most manufacturers produce standard PV panels with an output voltage of 12V or 24V. By connecting many single PV panels in series (for a higher voltage requirement) and in parallel (for a higher current requirement) the PV array will produce the desired power output.



3.INVERTERS

3.a.Working Principle

A solar inverter can be defined as an electrical converter that changes the uneven DC (direct current) output of a solar panel into an AC (alternating current). This current can be used for different applications like in a viable electrical grid otherwise off-grid electrical network.

In a PV system, it is a dangerous BOS (balance of system) component that allows the utilization of normal AC powered apparatus. These inverters have some functions with PV arrays like tracking of utmost PowerPoint & protection of anti-islanding. If we are using a solar system for a home, the selection & installation of the inverter is important. So, an inverter is an essential device in the solar power system.



3.b.Types of Inverters

Solar inverters may be classified into three broad types:

- Stand-alone inverters, used in isolated systems where the inverter draws its DC energy from batteries charged by photovoltaic arrays. Many stand-alone inverters also incorporate integral battery chargers to replenish the battery from an AC source, when available. Normally these do not interface in any way with the utility grid, and as such, are not required to have anti-islanding protection.
- Grid-tie inverters, which match phase with a utility-supplied sine wave. Grid-tie inverters are designed to shut down automatically upon loss of utility supply, for safety reasons. They do not provide backup power during utility outages.
- Battery backup inverters, are special inverters which are designed to draw energy from a battery, manage the battery charge via an onboard charger, and


export excess energy to the utility grid. These inverters are capable of supplying AC energy to selected loads during a utility outage, and are required to have anti-islanding protection.

- Intelligent hybrid inverters, manage photovoltaic array, battery storage and utility grid, which are all coupled directly to the unit. These modern all-in-one systems are usually highly versatile and can be used for grid-tie, stand-alone or backup applications but their primary function is self-consumption with the use of storage.

4.CONTROLLERS

4.a.Functions of Controllers

The most essential charge controller basically controls the device voltage and opens the circuit, halting the charging, when the battery voltage ascends to a certain level. More charge controllers utilized a mechanical relay to open or shut the circuit, halting or beginning power heading off to the electric storage devices.

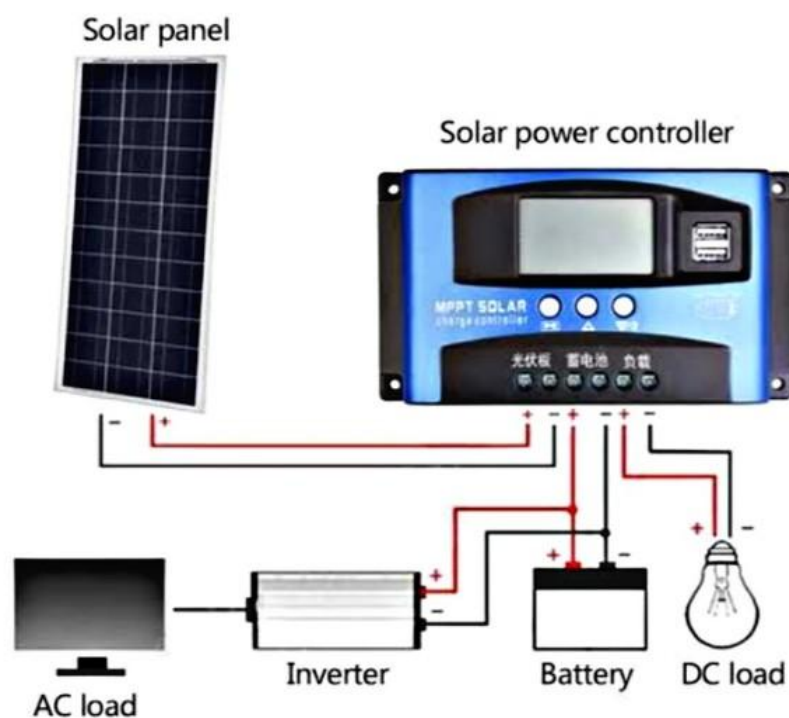

Generally, solar power systems utilize 12V of batteries. Solar panels can convey much more voltage than is obliged to charge the battery. The charge voltage could be kept at the best level while the time needed to completely charge the electric storage devices is lessened. This permits the solar systems to work optimally constantly. By running higher voltage in the wires from the solar panels to the charge controller, power dissipation in the wires is diminished fundamentally.

The solar charge controllers can also control the reverse power flow. The charge controllers can distinguish when no power is originating from the solar panels and open the circuit separating the solar panels from the battery devices and halting the reverse current flow.

4.b.Types of Controller

There are three different types of solar charge controllers, they are:

1. Simple 1 or 2 stage controls
2. PWM (pulse width modulated)
3. Maximum power point tracking (MPPT)

Simple 1 or 2 Controls: It has shunt transistors to control the voltage in one or two steps. This controller basically just shorts the solar panel when a certain voltage is arrived at. Their main genuine fuel for keeping such a notorious reputation is their unwavering quality – they have so not many segments, there is very little to break.

PWM (Pulse Width Modulated): This is the traditional type charge controller, for instance, anthrax, Blue Sky, and so on. These are essentially the industry standard now.

Maximum power point tracking (MPPT): The MPPT solar charge controller is the sparkling star of today's solar systems. These controllers truly identify the best working voltage and amperage of the solar panel exhibit and match that with the electric cell bank. The outcome is extra 10-30% more power out of your sun oriented cluster versus a PWM controller. It is usually worth the speculation for any solar electric systems over 200 watts.

5.BATTERY

5.a.Purpose of Battery in PV

Batteries store and produce energy as needed. In PV systems, they capture surplus energy generated by your PV system to allow you to store energy for use later in the day. Like technologies such as fuel cells, a battery converts chemical energy to electrical energy. Rechargeable batteries also convert electrical energy into chemical energy. Depending upon your particular PV system, batteries may help you to use more of the energy collected by your PV system. Batteries can provide power when electrical loads require more power than the PV panels are generating. This can be due to the generation of less electricity due to adverse weather conditions, greater than normal power usage, or other anomalies with the PV power collection. Batteries also help establish the DC operating voltage for the required auxiliary components in the PV system. However, they can be expensive, and each system needs to be designed extremely well so that they are worth the added expense.

During the day:

- The PV system generates solar energy
- The system will check to see if all of the energy generation can be used to power your household
- Any surplus energy will be used to charge the battery
- If the battery is already charged, excess energy will be exported to the grid

At night or when there is low power generation:

- The PV system generates little to no solar energy
- Energy is obtained from the battery system
- After the battery is discharged, electricity can be obtained from the grid

5.b.Types of batteries

There are four main types of battery used in connection with storing electricity from solar power systems. Below is a summary of the various technologies currently commercially available and links to further information on each type.

1) Lead acid

Boring perhaps. Ugly and bulky definitely. But also dependable, tried and tested. Lead acid batteries have been taking Aussies off-grid for decades. But

they are rapidly being eclipsed by other technologies with longer warranties and lower pricing as solar battery storage becomes more popular.

2) Lithium-ion

Lithium-ion (Li-ion) batteries are evolving in leaps and bounds as the electric car industry drives their development. Spearheaded by the brilliantly marketed Tesla Powerwall, lithium-ion batteries are looking to become the most popular choice for on-grid solar battery storage for the foreseeable future.

3) Flow


Flow batteries are a relatively new entrant to the battery storage marketplace (though their technology has been around for many years).

They are called flow batteries because they have a water based solution of zinc-bromide sloshing around inside them. At the moment only a few companies are producing flow batteries for the residential market, the most prominent of which is Redflow, an Australian-based flow battery company that outsources battery manufacturing to Thailand (previously North America). The ZCell is the smallest flow battery on the market

4) Sodium Nickel Chloride

Sodium nickel chloride technology is yet another competitor to the dominant lithium-ion storage technology. In Australia, GridEdge is producing their Quantum battery which, offers a range of environmental and safety benefits due to its unique battery chemistry.

6.SOLAR PV CHARACTERISTICS & PERFORMANCE

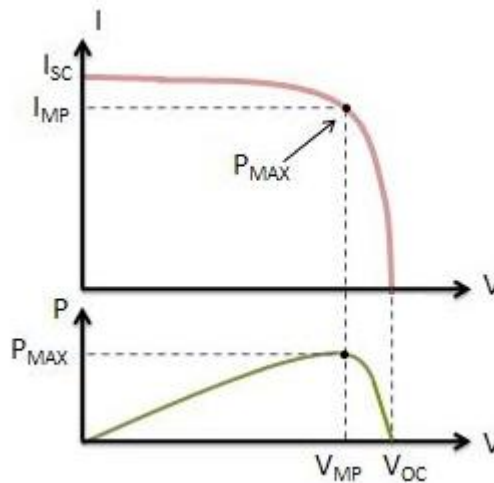

A Current (I) versus Voltage (V) Curve of a PV / Solar Module shows the possible combinations of its current and voltage outputs. A typical I-V curve for a 12 V Module is shown in diagram.

The power in a DC electrical circuit is the product of the voltage and the current. Mathematically,

Power (P) in Watts (W) = The Current (I) in Amperes (A) X the Voltage (V) in Volts (V) i.e. $W = V \times A$

A Solar (PV) Cell or a Panel / Module produces its maximum current when there is no resistance in the circuit, i.e. when there is a short circuit between its Positive and Negative terminals. This maximum current is known as the Short Circuit Current and is abbreviated as I_{SC} . When the Cell / Panel (Module) is shorted, the voltage in the circuit is zero.

Conversely, the maximum voltage occurs when there is a break in the circuit. This is called the Open Circuit Voltage (V_{OC}). Under this condition, the resistance is infinitely high and there is no current, since the circuit is incomplete. Typical value of the open-circuit voltage is located about 0.5 – 0.6 V for Crystalline Cells and 0.6 – 0.9 V for Amorphous Cells. These two extremes in load resistance, and the whole range of conditions in between them, are depicted on the I-V Curve. Current, expressed in Amps, is on the vertical Y-axis. Voltage, in Volts, is on the horizontal X-axis.

The power available from a photovoltaic device at any point along the curve is just the product of Current (I) in Amps (A) and Voltage (V) in Volts (V) at that

point and is expressed in Watts. At the short circuit current point, the power output is zero, since the voltage is zero. At the open circuit voltage point, the power output is also zero, but this time it is because the current is zero.


There is a point on the knee of the I-V Curve where the maximum power output is located and this point is called the Maximum Power Point (MPP). The voltage and current at this Maximum Power Point are designated as V_{mp} and I_{mp} .

The values of V_{mp} and I_{mp} can be estimated from V_{oc} and I_{sc} as follows: $V_{mp} = (0.75 \text{ } \hat{=} \text{ } 0.9) V_{oc}$ $I_{mp} = (0.85 \text{ } \hat{=} \text{ } 0.95) I_{sc}$

The rated power of the PV / Solar Module in Watts (P_{max}) is derived from the above values of voltage V_{mp} and current I_{mp} at this Maximum Power Point (MPP):

Rated power in Watts, $P_{max} = V_{mp} \times I_{mp}$

Example of I-V Curve and Ratings of a 12 V Solar (PV) Panel

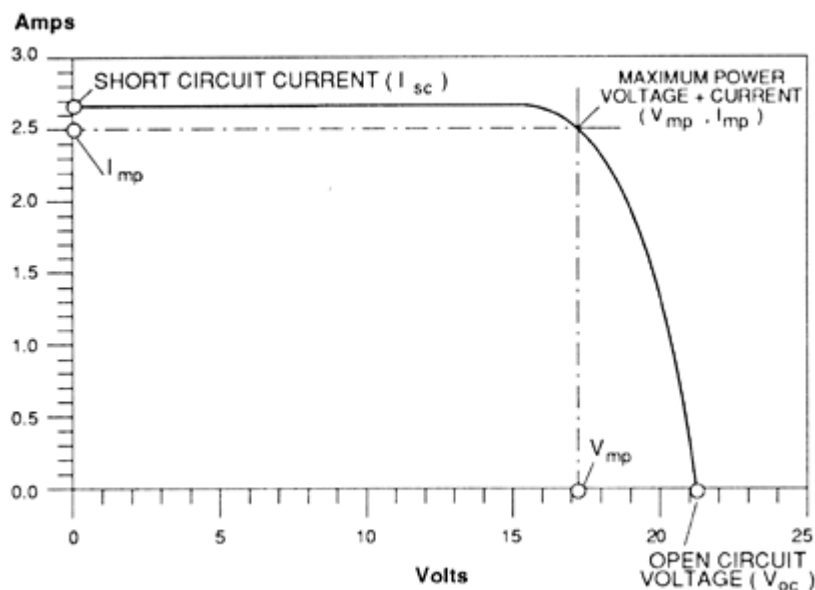

The I-V Curve for a typical 12 Volt PV / Solar Panel is shown In diagram.

This Maximum Power Point in the example curve given above is where V_{mp} is 17 Volts, and the current I_{mp} is 2.5 amps. Therefore, the rated or the maximum power W_{max} in watts is 17 Volts times 2.5 Amps, or 42.5 Watts.

The I-V curve is also used to compare the performance of PV / Solar Modules. The curve is, therefore generated based on the performance under Standard

Test Conditions (STC) of sunlight and device temperature of 25 °C. It assumes there is no shading on the device. Standard sunlight conditions on a clear day are assumed to be 1,000 Watts of solar energy per square meter (1000 W/m² or 1 kW/m²). This is sometimes called one sun, or a peak sun. Less than one sun will reduce the current output of the PV device by a proportional amount. For example, if only one-half sun (500 W/m²) is available, the amount of output current is roughly cut in half.

7.SOFTWARE-SOLAR PRO

The software calculates the I-V curve of solar modules accurately and quickly based on the electric characteristics of each manufacturer's product. The software calculates the amount of generated electricity based on the latitudes, longitudes, and the weather conditions of the installation site.




7.a.Report

Solar Pro is used to create 3D models of residential, commercial flat-roof, ground-mounted, and single & dual-axis tracker PV systems. The shading effects of each object created in Solar Pro, including trees, buildings, and adjacent PV arrays, can be easily visualized on a minute-by-minute basis, 365 days of the year.

Solar Pro predicts hourly electricity generation using scientific, industry-standard mathematical models. IV Curve calculations are performed at the



Energy Graph

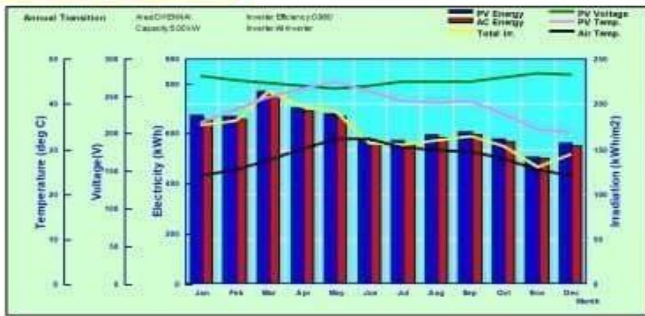


Location and PV data

*Location
CHENNAI
INDIA
[Address]

*Title
[Words]

*PV System Information

Capacity 5.00kW
System Setting 1 Inverter, 4 Parallel, 6 Series
Manufacturer Schott solar
Model ASE-260-DG-FT(250)




12-Month Detailed Report

Term	AC Energy kWh	Specific AC Energy kWh/kWp	Load Energy kWh	Bill Reduction rupees	Selling Price rupees	Buying Price rupees
Jan	665.91	132.38	0.00	6,619	6,619	0
Feb	600.30	120.06	0.00	6,003	6,003	0
Mar	757.23	151.45	0.00	7,572	7,572	0
Apr	892.82	178.56	0.00	8,928	8,928	0
May	871.27	174.25	0.00	8,713	8,713	0
Jun	953.46	190.69	0.00	9,535	9,535	0
Jul	966.89	193.38	0.00	9,669	9,669	0
Aug	987.20	197.44	0.00	9,872	9,872	0
Sep	998.80	199.76	0.00	9,988	9,988	0
Oct	970.62	194.12	0.00	9,706	9,706	0
Nov	901.80	180.36	0.00	9,018	9,018	0
Dec	953.80	190.76	0.00	9,538	9,538	0
Max Value	957.23	191.45	0.00	9,572	9,572	0
Min Value	615.31	123.10	0.00	6,155	6,155	0
Sum Value	7,386.11	1,477.22	0.00	73,861	73,861	0



Economy Simulation

Annual AC Energy 7,386 kWh
Annual Load Energy 0 kWh
Electric Bill Reduction 73,861 rupees
Pay Back Period 4 years 1 months
Crude Oil Reduction 1,898 [L]
CO2 Reduction 3,782 [kg-CO₂]

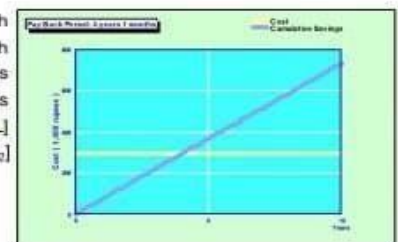

*User Text

module level and take into account irradiation & temperature data, shading, and other detailed loss factors.

PV Generation System Simulation

This is a example report for Bangalore.

This report has a energy graph,each month detailed report, economy simulation and PV data for complete 365 days.

REFERENCE

<http://pvinsights.com/Knowledge/Principle.php>

<https://www.cleanmax.com/solar-update/how-solar-energy-compares-to-other-renewable-sources-of-energy.php>

https://en.m.wikipedia.org/wiki/List_of_types_of_solar_cells

https://en.m.wikipedia.org/wiki/Solar_inverter

<https://www.solarpowerworldonline.com/2015/07/what-is-a-charge-controllers-function/>

<https://www.fuelcellstore.com/blog-section/battery-energy-storage-for-the-pv-system>

<https://www.e-education.psu.edu/ae868/node/518>

<https://www.alternative-energy-tutorials.com/solar-power/pv-array.html>

<https://www.lapsys.co.jp/english/products/pro.html>