

PROFESSIONAL TRAINING REPORT
AT
SATHYABAMA INSTITUTE OF SCIENCE AND TECHNOLOGY
(DEEMED TO BE UNIVERSITY)

Submitted in partial fulfilment of the requirements for the award of
Bachelor of Technology Degree in Information Technology

By

Roshan Christy R

38120069



DEPARTMENT OF INFORMATION TECHNOLOGY
SCHOOL OF COMPUTING

SATHYABAMA
INSTITUTE OF SCIENCE AND TECHNOLOGY
(DEEMED TO BE UNIVERSITY)

ACCREDITED WITH GRADE “A” BY NAAC
JEPPIAAR NAGAR, RAJIV GANDHI SALAI,

CHENNAI – 600 119



SATHYABAMA INSTITUTE OF SCIENCE AND TECHNOLOGY

(Established Under Section 3 Of Ugc Act, 1956)

JEPPIAAR NAGAR, RAJIV GANDHI SALAI,

CHENNAI 600 119

www.sathyabama.ac.in



SCHOOL OF COMPUTING

BONAFIDE CERTIFICATE

This is to certify that this Project Report is the bonafide work of Name **Roshan Christy R (Reg.no.38120069)** who carried out the project entitled **“Canteen Food Ordering and Management System in PHP”** under our supervision from Jan 2019 to April 2019.

INTERNAL GUIDE

Dr. Jabez M.E., P.HD.,

HEAD OF THE DEPARTMENT

Dr. R. Subhashini M.E., Ph.D.,

Submitted for Viva Voce Examination held on 01.11.2021

Internal Examiner

External Examiner

DECLARATION

I **Roshan Christy R** hereby declare that the project report entitled **“Canteen Food Ordering and Management System in PHP”** done by me under the guidance of **Dr. Jabez M.E., P.HD.**, at “Sathyabama Institute of Science and Technology (Deemed to be University), Jeppiaar Nagar, Rajiv Gandhi Salai, Chennai – 600119” is submitted in partial fulfilment of the requirements for the award of Bachelor of Engineering/Technology degree in Information Technology.

DATE: 01.11.2021

PLACE: CHENNAI

SIGNATURE OF CANDIDATE

ACKNOWLEDGEMENT

I am pleased to acknowledge my sincere thanks to Board of Management of **Sathyabama** for their kind encouragement in doing this project and for completing it successfully. I am grateful to them.

I convey our thanks to **Dr. T. Sasikala M.E., Ph.D., Dean, School of Computing** and **Dr. R. Subhashini M.E., Ph.D., Head of the Department, Department of Information Technology** for providing us the necessary support and details at the right time during the progressive reviews.

I would like to express my sincere and deep sense of gratitude to my Project Guide **Dr. Jabez M.E., P.HD.**, for her valuable guidance, suggestions, and constant encouragement paved way for the successful completion of my project work.

I wish to express my thanks to all teaching and non-teaching staff members of the Department of **Information Technology** who was helpful in many ways for the completion of the project.

INTERNSHIP CERTIFICATION



RETECH
SOLUTIONS PVT. LTD.
An ISO 9001:2015 certified company

INT: RE20S068

TO WHOMSOEVER IT MAY CONCERN

This is to certify that **ROSHAN CHRISTY R** student of **SATHYABAMA INSTITUTE OF SCIENCE AND TECHNOLOGY, BTECH/IT** has undergone the Internship Training through online in our concern entitled **PHP&SQL** from **15th Aug 2020** to **29th Aug 2020** in relevant departments related to their academic studies.

During the above period, the performance was good & we wish great success in all your future endeavours.

Technology drives the world. We are the people who are behind the technology.

Authorised Signature



No-31, 1st Floor, Alagesan Street, Tambaram West, Chennai-45.

Office : 044-42077204 | +91-8122266653

www.retechsolutions.in

ABSTRACT

Canteen Food Ordering and Management System in PHP

Canteen Food Ordering and Management System in PHP is a process in which one can order various foods and beverages from some local restaurant or college canteen and hotels through the use of internet, just by sitting at home or any place. And the order is delivered to the told location.

It is a simple project developed using PHP, JavaScript, and CSS. The project connects canteens, mess and restaurants with customers. The project contains an admin(manager) and the user side. All the management like editing site contents, updating food items, adding restaurants, and checking order status can be managed from the admin side. There can be many managers on the site.

For the user section, the users can go through the homepage, about, and contact pages. In order to order the food items, the user has to create an account and sign in or log in. The food comes with the cost as well. This project makes a convenient way for customers to buy/purchase food online, without having to go to the restaurant.

TABLE OF CONTENTS:

CHAPTER NO	TITLE	PAGE NO:
1	ABSTRACT ABBREVIATIONS	1-6
2	INTRODUCTION	9
3	AIM AND SCOPE	9-10
4	TECHNOLOGY USED	10-11
5	WORKFLOW	11
6	FUTURE SCOPE AND DISCUSSION	12
7	CONCLUSION AND REFERENCES	12-13
8	SOURCE CODE AND SCREENSHOTS	13-61

LIST OF ABBREVIATIONS

ABBREVIATION	EXPANSION
HTML	HYPERTEXT MARKUP LANGUAGE
CSS	CASCADING STYLE SHEETS
PHP	HYPERTEXT PREPROCESSOR
JS	JAVASCRIPT

INTRODUCTION

The online canteen food ordering system contains the e-menu cards that contain the details of the food. The user initially has to create an account for the utilization of the service. It will provide the list of different canteens and their various items menu list. The customer can select the desired item and can pay the amount through online payment gateway system. Immediately after booking the order, the canteen people will get the information of the order and they prepare the order. In the existing system there will be queues and the manual work load will be there. In the proposed system there is no need for the paper-work. The data can be stored in the database.

The food will be ready in advance and the customers need not to wait near the delivery place. The digitalization of the canteen system will be helpful in providing the better service to the users and the time consumption will be reduced. The user can select can select particular item like in the four slots where there are admins for all the four slots. The updation and deletion of any item can be done. At last the user's feedback will be taken to improve the service and to make it available to everyone.

The online system will help be helpful for the food makers to prepare the food as early as possible. As a result, there will be quick serving to the customers. No queues can be formed for waiting of the food. The updating of the data to the database will be monitored by the admin. The user's data like recognizing the regular users to the canteen will be done and sent to the database. The security of data is done by the encrypted format and server databases of the institution.

AIM AND SCOPE:

The main objective of the Project on Canteen Food ordering System is to manage the details of Canteen, Meal, It's Type, and Canteen Staff. It manages all the information about Canteen, Bill Payment, Canteen Staff, and Canteen. The project is totally built at administrative end and thus only the administrator has authority to the access. The purpose of the project is to build an application program to reduce the manual work for managing the Canteen, Student Information, Bill Payment, and Student Meal. It tracks all the details about the Canteen Meal, It's Type, and Canteen Staff.

Functionalities provided by Canteen Management System are as follows:

- It tracks all the information of Student, Bill Payment, Meal Type, etc.
- Provides the sorting and searching facilities based on various factors. Such as Company Canteen, Student Meal, Meal Type
- Manage the information of Canteen Editing, adding and updating of Records is improved which results in proper resource management of Company Canteen data.
- Manage the information of Meal Type

- Integration of all records of Canteen Staff

TYPE OF USERS:

1. Admin Login

- Take Order
- Bill Print
- Add/ Remove Food Items
- Add offers
- Update Inventory
- Order Forecasting (Predict Items Most Frequently During Specific Hours)
- Sales for each day and month
- Sales of individual item for the day
- Total Earnings

2. User Login

- Place an Order
- Combo Box Selection
- Menu Items
- Bill Payment

FRONT END:

HTML:

Hypertext Markup Language (HTML) is the standard markup language for creating webpages and applications. Each page contains a series of connections to other pages called hyperlinks. HTML describes the structure of a webpage semantically and originally included cues for the appearance of the document. HTML elements are delineated by tags, written using angle brackets. Tags such as and <input/> introduce content into the page directly. Others such as <p>....</p> surround and provide information about document text and may include other tags as sub-elements. Browsers do not display the HTML tags, but use them to interpret the content of the page.

HTML code ensures the proper formatting of text and images so that your Internet browser may display them as they are intended to look. Without HTML a browser would not know how to display text as elements or load images or other elements. HTML also provides a basic structure of the page, upon which Cascading Style Sheets are overlaid to change its appearance.

CSS:

Cascading Style Sheets (CSS) is a style sheet language used for describing the presentation of a document written in a markup language, CSS is designed primarily to enable the separation of presentation and content including aspects


such as the layouts, colors, and fonts. This separation can improve content accessibility, provide more flexibility and control in the specification of presentation characteristics, enable multiple HTML pages to share formatting by specifying the relevant CSS in a separate .css file, and reduce complexity and repetition in the structural content.

PHP:

PHP (Hypertext Preprocessor) is a widely used open-source general purpose scripting language that is especially suited for web development and can be embedded into HTML basically, a server-side scripting language designed primarily for web development but also used as a general-purpose programming language. PHP code may be embedded into HTML or HTML5 markup, or it can be used in combination with various web template systems, web content management systems and web frameworks.

PHP code is usually processed by a PHP interpreter implemented as a module in the web server or as a Common Gateway Interface (CGI) executable. The web server software combines the results of the interpreted and executed PHP code, which may be any type of data, including images, with the generated webpage code may also be executed with a command-line interface (CLI) and can be used to implement standalone graphical applications.

WORKFLOW:

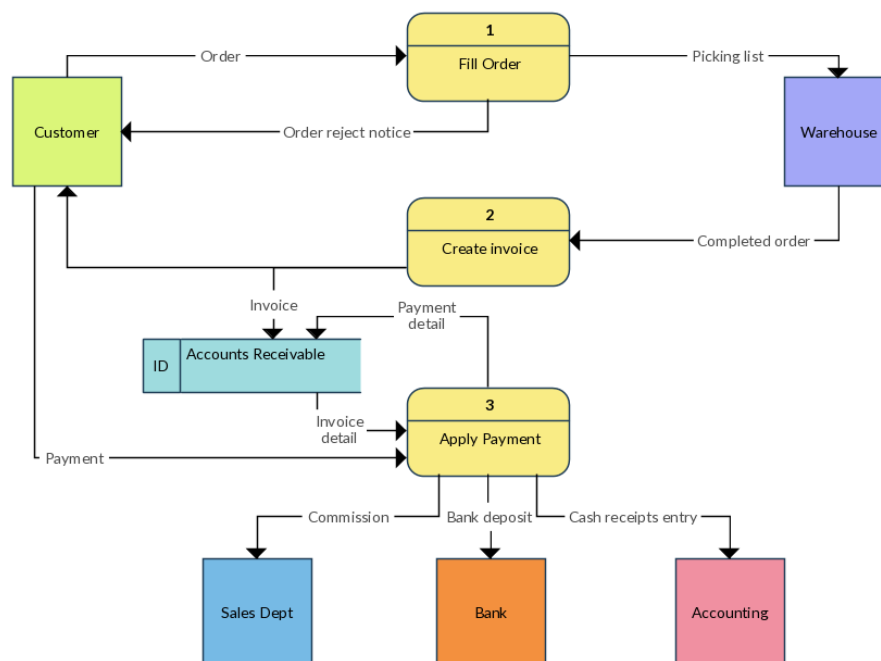

FUTURE SCOPE:

The present system depends on the online management. This can be improvised by the automation of the software's. The data storing will takes time and it requires the manual observation. With the help of the automation it would store the data instantly. This will reduce the effort time by the manual observation. The updated data will be finalized and alerts time to time to the admin. The machine learning algorithms can also be used for the prediction of the most preferred item by the customers.

The customers will give the feedback and this will be sent to the database. Using the machine learning algorithms these feedbacks will be analyzed and preferred food item will be displayed to the regular users on the online system. The menu list can also be updated according to the admin's choice by the shortcut methods used in the learning algorithms.

ADVANTAGES:

- Security of data and ensures data accuracies.
- Proper control of the higher officials.
- Minimize manual data entry.
- Minimum time needed for the various processing.
- Greater efficiency and better service.
- User friendliness and interactive.
- Minimum time required.

APPLICATIONS:

The system can be used in cafeteria, canteen, restaurants, etc

CONCLUSION:

The development of Canteen food ordering system involved many phases. The approach used is a top-down one concentrating on what first and steps for moving to successive levels of details. In primary phase, the system is designed at block level. The blocks are created on the basis of analysis done during the problem identification phase. Different blocks are created for different functions emphasis is put on minimizing the information flow between blocks. Thus, the activities which require more interaction are kept in one block. During this phase, strict adherence was made to prove software engineering principles and practices. To implement this design, a computer program was written and tested on Net Beans IDE. It is hoped that effective implementation of this software product would eliminate many problems discovered during systems investigation.

REFERENCES:

- [1] en.wikipedia.org
 - [2] <https://netbeans.org/kb/docs/java/quickstart.html>
 - [3] <https://www.javacodegeeks.com/2018/04/netbeans-ide-tutorial.html>
 - [4] <http://www.mysqltutorial.org/php-connecting-to-mysql-database/>
 - [5] https://www.tutorialspoint.com/android/android_studio.htm
 - [6] <https://www.androidauthority.com/android-studio-tutorial-beginners-637572/>
-

SOURCE CODE:

Register.php,

```
<?php
session_start();
if(isset($_SESSION['admin_sid']) || isset($_SESSION['customer_sid']))
{
    header("location:index.php");
}
else{
?>

<!DOCTYPE html>

<html lang="en">

<head>

    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">

    <meta name="viewport" content="width=device-width, initial-scale=1, maximum-
scale=1.0, user-scalable=no">

    <meta http-equiv="X-UA-Compatible" content="IE=edge">

    <meta name="msapplication-tap-highlight" content="no">

    <title>Register</title>
```

<!-- Favicons-->

<link rel="icon" href="images/favicon/favicon-32x32.png" sizes="32x32">

<!-- Favicons-->

<link rel="apple-touch-icon-precomposed" href="images/favicon/apple-touch-icon-152x152.png">

<!-- For iPhone -->

<meta name="msapplication-TileColor" content="#00bcd4">

<meta name="msapplication-TileImage" content="images/favicon/mstile-144x144.png">

<!-- For Windows Phone -->

<!-- CORE CSS-->

<link href="css/materialize.min.css" type="text/css" rel="stylesheet" media="screen,projection">

<link href="css/style.min.css" type="text/css" rel="stylesheet" media="screen,projection">

<!-- Custome CSS-->

<link href="css/custom/custom.min.css" type="text/css" rel="stylesheet" media="screen,projection">

<link href="css/layouts/page-center.css" type="text/css" rel="stylesheet" media="screen,projection">

<link href="js/plugins/perfect-scrollbar/perfect-scrollbar.css" type="text/css" rel="stylesheet" media="screen,projection">

<style type="text/css">

.input-field div.error{

position: relative;

```

top: -1rem;

left: 0rem;

font-size: 0.8rem;

color:#FF4081;

-webkit-transform: translateY(0%);
-ms-transform: translateY(0%);
-o-transform: translateY(0%);
transform: translateY(0%);
}

.input-field label.active{
width:100%;
}

.left-alert input[type=text] + label:after,
.left-alert input[type=password] + label:after,
.left-alert input[type=email] + label:after,
.left-alert input[type=url] + label:after,
.left-alert input[type=time] + label:after,
.left-alert input[type=date] + label:after,
.left-alert input[type=datetime-local] + label:after,
.left-alert input[type=tel] + label:after,
.left-alert input[type=number] + label:after,
.left-alert input[type=search] + label:after,
.left-alert textarea.materialize-textarea + label:after{
left:0px;
}

.right-alert input[type=text] + label:after,
.right-alert input[type=password] + label:after,

```

```

.right-alert input[type=email] + label:after,
.right-alert input[type=url] + label:after,
.right-alert input[type=time] + label:after,
.right-alert input[type=date] + label:after,
.right-alert input[type=datetime-local] + label:after,
.right-alert input[type=tel] + label:after,
.right-alert input[type=number] + label:after,
.right-alert input[type=search] + label:after,
.right-alert textarea.materialize-textarea + label:after{
  right:70px;
}
</style>
</head>

```

```

<body class="cyan">
<!-- Start Page Loading -->
<div id="loader-wrapper">
<div id="loader"></div>
<div class="loader-section section-left"></div>
<div class="loader-section section-right"></div>
</div>
<!-- End Page Loading -->

```

```

<div id="login-page" class="row">
<div class="col s12 z-depth-4 card-panel">

```

```

<form      class="formValidate"      id="formValidate"      method="post"
action="routers/register-router.php" novalidate="novalidate" class="col s12">

<div class="row">

<div class="input-field col s12 center">

<h4>Register</h4>

<p class="center">Join us now!</p>

</div>

</div>

<div class="row margin">

<div class="input-field col s12">

<i class="mdi-social-person-outline prefix"></i>

<input name="username" id="username" type="text" data-error=".errorTxt1">

<label for="username" class="center-align">Username</label>

<div class="errorTxt1"></div>

</div>

</div>

<div class="row margin">

<div class="input-field col s12">

<i class="mdi-social-person prefix"></i>

<input name="name" id="name" type="text" data-error=".errorTxt2">

<label for="name" class="center-align">Name</label>

<div class="errorTxt2"></div>

</div>

</div>

<div class="row margin">

<div class="input-field col s12">

<i class="mdi-action-lock-outline prefix"></i>

```

```

<input name="password" id="password" type="password" data-error=".errorTxt3">
<label for="password">Password</label>
<div class="errorTxt3"></div>
</div>
</div>
<div class="row margin">
<div class="input-field col s12">
<i class="mdi-communication-phone prefix"></i>
<input name="phone" id="phone" type="number" data-error=".errorTxt4">
<label for="phone">Phone</label>
<div class="errorTxt4"></div>
</div>
</div>
<div class="row">
<div class="input-field col s12">
<a
                                href="javascript:void(0);"
onclick="document.getElementById('formValidate').submit();" class="btn waves-effect
waves-light col s12">Login</a>
</div>
<div class="input-field col s12">
<p class="margin center medium-small sign-up">Already have an account? <a
href="login.php">Login</a></p>
</div>
</div>
</form>
</div>
</div>

```

<!-- =====

Scripts

===== -->

<!-- jQuery Library -->

<script type="text/javascript" src="js/plugins/jquery-1.11.2.min.js"></script>

<!--materialize js-->

<script type="text/javascript" src="js/materialize.min.js"></script>

<!--scrollbar-->

<script type="text/javascript" src="js/plugins/perfect-scrollbar/perfect-scrollbar.min.js"></script>

<script type="text/javascript" src="js/plugins/jquery-validation/jquery.validate.min.js"></script>

<script type="text/javascript" src="js/plugins/jquery-validation/additional-methods.min.js"></script>

<!--plugins.js - Some Specific JS codes for Plugin Settings-->

<script type="text/javascript" src="js/plugins.min.js"></script>

<!--custom-script.js - Add your own theme custom JS-->

<script type="text/javascript" src="js/custom-script.js"></script>

<script type="text/javascript">

\$("#formValidate").validate({

rules: {

username: {

required: true,

minlength: 5

```
},
name: {
  required: true,
  minlength: 5
},
password: {
  required: true,
  minlength: 5
},
phone: {
  required: true,
  minlength: 4
},
},
},
messages: {
  username: {
    required: "Enter username",
    minlength: "Minimum 5 characters are required."
  },
  name: {
    required: "Enter name",
    minlength: "Minimum 5 characters are required."
  },
  password: {
    required: "Enter password",
    minlength: "Minimum 5 characters are required."
  },
},
```

```

phone:{
required: "Specify contact number.",
minlength: "Minimum 4 characters are required."
},
},
errorElement : 'div',
errorPlacement: function(error, element) {
var placement = $(element).data('error');
if (placement) {
$(placement).append(error)
} else {
error.insertAfter(element);
}
}
});
</script>
</body>
</html>
<?php
}
?>
Index.php,
<?php
include 'includes/connect.php';
include 'includes/wallet.php';

if($_SESSION['customer_sid']==session_id())

```

```

{
?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">

<meta name="viewport" content="width=device-width, initial-scale=1, maximum-
scale=1.0, user-scalable=no">

<meta http-equiv="X-UA-Compatible" content="IE=edge">

<meta name="msapplication-tap-highlight" content="no">

<title>Order Food</title>

<!-- Favicons-->

<link rel="icon" href="images/favicon/favicon-32x32.png" sizes="32x32">

<!-- Favicons-->

<link rel="apple-touch-icon-precomposed" href="images/favicon/apple-touch-icon-
152x152.png">

<!-- For iPhone -->

<meta name="msapplication-TileColor" content="#00bcd4">

<meta name="msapplication-TileImage" content="images/favicon/mstile-
144x144.png">

<!-- For Windows Phone -->


<!-- CORE CSS-->

<link href="css/materialize.min.css" type="text/css" rel="stylesheet"
media="screen,projection">

```

```
<link href="css/style.min.css" type="text/css" rel="stylesheet"
media="screen,projection">
```

```
<!-- Custome CSS-->
```

```
<link href="css/custom/custom.min.css" type="text/css" rel="stylesheet"
media="screen,projection">
```

```
<!-- INCLUDED PLUGIN CSS ON THIS PAGE -->
```

```
<link href="js/plugins/perfect-scrollbar/perfect-scrollbar.css" type="text/css"
rel="stylesheet" media="screen,projection">
```

```
<link href="js/plugins/data-tables/css/jquery.dataTables.min.css" type="text/css"
rel="stylesheet" media="screen,projection">
```

```
<style type="text/css">
```

```
.input-field div.error{
```

```
position: relative;
```

```
top: -1rem;
```

```
left: 0rem;
```

```
font-size: 0.8rem;
```

```
color:#FF4081;
```

```
-webkit-transform: translateY(0%);
```

```
-ms-transform: translateY(0%);
```

```
-o-transform: translateY(0%);
```

```
transform: translateY(0%);
```

```
}
```

```
.input-field label.active{
```

```
width:100%;
```

```
}
```

```
.left-alert input[type=text] + label:after,
```

```
.left-alert input[type=password] + label:after,
```

```

.left-alert input[type=email] + label:after,
.left-alert input[type=url] + label:after,
.left-alert input[type=time] + label:after,
.left-alert input[type=date] + label:after,
.left-alert input[type=datetime-local] + label:after,
.left-alert input[type=tel] + label:after,
.left-alert input[type=number] + label:after,
.left-alert input[type=search] + label:after,
.left-alert textarea.materialize-textarea + label:after{
left:0px;
}
.right-alert input[type=text] + label:after,
.right-alert input[type=password] + label:after,
.right-alert input[type=email] + label:after,
.right-alert input[type=url] + label:after,
.right-alert input[type=time] + label:after,
.right-alert input[type=date] + label:after,
.right-alert input[type=datetime-local] + label:after,
.right-alert input[type=tel] + label:after,
.right-alert input[type=number] + label:after,
.right-alert input[type=search] + label:after,
.right-alert textarea.materialize-textarea + label:after{
right:70px;
}
</style>
</head>

```

```

<body>

<!-- Start Page Loading -->

<div id="loader-wrapper">

<div id="loader"></div>

<div class="loader-section section-left"></div>

<div class="loader-section section-right"></div>

</div>

<!-- End Page Loading -->


<!-- //////////////////////////////////////// -->


<!-- START HEADER -->

<header id="header" class="page-topbar">

<!-- start header nav-->

<div class="navbar-fixed">

<nav class="navbar-color">

<div class="nav-wrapper">

<ul class="left">

<li><h1 class="logo-wrapper"><a href="index.php" class="brand-logo darken-1"></a> <span class="logo-text">Logo</span></h1></li>

</ul>

<ul class="right hide-on-med-and-down">

<li><a href="#" class="waves-effect waves-block waves-light"><i class="mdi-editor-attach-money"><?php echo $balance;?></i></a>

</li>

</ul>

</div>

```

```

</nav>

</div>

<!-- end header nav-->

</header>

<!-- END HEADER -->


<!-- //////////////////////////////////////// -->


<!-- START MAIN -->

<div id="main">

<!-- START WRAPPER -->

<div class="wrapper">


<!-- START LEFT SIDEBAR NAV-->

<aside id="left-sidebar-nav">

<ul id="slide-out" class="side-nav fixed leftside-navigation">

<li class="user-details cyan darken-2">

<div class="row">

<div class="col col s4 m4 l4">



</div>

<div class="col col s8 m8 l8">

<ul id="profile-dropdown" class="dropdown-content">

<li><a href="routers/logout.php"><i class="mdi-hardware-keyboard-tab"></i>
Logout</a>

</li>

</ul>

```

</div>

<div class="col col s8 m8 l8">

<?php echo \$name;?> <i class="mdi-navigation-arrow-drop-down right"></i>

<p class="user-roal"><?php echo \$role;?></p>

</div>

</div>

<li class="bold active"><i class="mdi-editor-border-color"></i> Order Food

<li class="no-padding">

<ul class="collapsible collapsible-accordion">

<li class="bold"><i class="mdi-editor-insert-invitation"></i> Orders

<div class="collapsible-body">

All Orders

<?php

\$sql = mysqli_query(\$con, "SELECT DISTINCT status FROM orders WHERE customer_id = \$user_id;");

while(\$row = mysqli_fetch_array(\$sql)){

echo ''.\$row['status'].'

';

}

?>


```

</div>

</li>

</ul>

</li>

<li class="no-padding">

<ul class="collapsible collapsible-accordion">

<li class="bold"><a class="collapsible-header waves-effect waves-cyan"><i
class="mdi-action-question-answer"></i> Tickets</a>

<div class="collapsible-body">

<ul>

<li><a href="tickets.php">All Tickets</a>

</li>

<?php

$sql = mysqli_query($con, "SELECT DISTINCT status FROM tickets WHERE
poster_id = $user_id AND not deleted;");

while($row = mysqli_fetch_array($sql)){

echo '<li><a href="tickets.php?status='.$row['status'].'">'.$row['status'].'</a>

</li>';

}

?>

</ul>

</div>

</li>

</ul>

</li>

<li class="bold"><a href="details.php" class="waves-effect waves-cyan"><i
class="mdi-social-person"></i> Edit Details</a>

</li>

```


<i class="mdi-navigation-menu"></i>

</aside>

<!-- END LEFT SIDEBAR NAV-->

<!-- // -->

<!-- START CONTENT -->

<section id="content">

<!--breadcrumbs start-->

<div id="breadcrumbs-wrapper">

<div class="container">

<div class="row">

<div class="col s12 m12 l12">

<h5 class="breadcrumbs-title">Order</h5>

</div>

</div>

</div>

</div>

<!--breadcrumbs end-->

<!--start container-->

<div class="container">

<p class="caption">Order your food here.</p>

```

<div class="divider"></div>

<form class="formValidate" id="formValidate" method="post" action="place-
order.php" novalidate="novalidate">

<div class="row">

<div class="col s12 m4 l3">

<h4 class="header">Order Food</h4>

</div>

<div>

<table id="data-table-customer" class="responsive-table display" cellpadding="0">

<thead>

<tr>

<th>Name</th>

<th>Item Price/Piece</th>

<th>Quantity</th>

</tr>

</thead>

<tbody>

<?php
$result = mysqli_query($con, "SELECT * FROM items where not deleted;");
while($row = mysqli_fetch_array($result))
{
echo '<tr><td>'.$row["name"].'</td><td>'.$row["price"].'</td>';

echo '<td><div class="input-field col s12"><label for="'.$row["id"].'
class="">Quantity</label>';

echo '<input id="'.$row["id"].'" name="'.$row["id"].'" type="text" data-
error="'.errorTxt'.$row["id"].'"><div class="errorTxt'.$row["id"].'"></div></td></tr>';

}

```

```

?>

</tbody>

</table>

</div>

<div class="input-field col s12">

  <i class="mdi-editor-mode-edit prefix"></i>

  <textarea      id="description"      name="description"      class="materialize-
textarea"></textarea>

  <label for="description" class="">Any note(optional)</label>

</div>

<div>

  <div class="input-field col s12">

    <button  class="btn  cyan  waves-effect  waves-light  right"  type="submit"
name="action">Order

    <i class="mdi-content-send right"></i>

  </button>

</div>

</div>

</form>

<div class="divider"></div>

</div>

</div>

<!--end container-->

</section>

<!-- END CONTENT -->

```

</div>

<!-- END MAIN -->

<!-- // -->

<!-- START FOOTER -->

<footer class="page-footer">

<div class="footer-copyright">

<div class="container">

Copyright © 2017 <a class="grey-text text-lighten-4" href="#"
target="_blank">Students All rights reserved.

 Design and Developed by <a class="grey-text text-lighten-4"
href="#">Students

</div>

</div>

</footer>

<!-- END FOOTER -->

<!-- =====

Scripts

===== -->

<!-- jQuery Library -->

```

<script type="text/javascript" src="js/plugins/jquery-1.11.2.min.js"></script>

<!--angularjs-->

<script type="text/javascript" src="js/plugins/angular.min.js"></script>

<!--materialize js-->

<script type="text/javascript" src="js/materialize.min.js"></script>

<!--scrollbar-->

<script      type="text/javascript"      src="js/plugins/perfect-scrollbar/perfect-
scrollbar.min.js"></script>

<!-- data-tables -->

<script      type="text/javascript"      src="js/plugins/data-
tables/js/jquery.dataTables.min.js"></script>

<script      type="text/javascript"      src="js/plugins/data-tables/data-tables-
script.js"></script>


<script      type="text/javascript"      src="js/plugins/jquery-
validation/jquery.validate.min.js"></script>

<script      type="text/javascript"      src="js/plugins/jquery-validation/additional-
methods.min.js"></script>


<!--plugins.js - Some Specific JS codes for Plugin Settings-->

<script type="text/javascript" src="js/plugins.min.js"></script>

<!--custom-script.js - Add your own theme custom JS-->

<script type="text/javascript" src="js/custom-script.js"></script>

<script type="text/javascript">

$("#formValidate").validate({
rules: {
<?php
$result = mysqli_query($con, "SELECT * FROM items where not deleted;");
while($row = mysqli_fetch_array($result))

```

```

{
    echo $row["id"].':{
    min: 0,
    max: 10
    },
    ';
}
echo '},';

?>

    messages: {
<?php
$result = mysqli_query($con, "SELECT * FROM items where not deleted;");
while($row = mysqli_fetch_array($result))
{
    echo $row["id"].':{
    min: "Minimum 0",
    max: "Maximum 10"
    },
    ';
}
echo '},';

?>

    errorElement : 'div',
    errorPlacement: function(error, element) {
    var placement = $(element).data('error');
    if (placement) {
    $(placement).append(error)

```

```

    } else {
        error.insertAfter(element);
    }
}
});
</script>
</body>

```

```

</html>
<?php
}
else
{
    if($_SESSION['admin_sid']==session_id())
    {
        header("location:admin-page.php");
    }
    else{
        header("location:login.php");
    }
}
?>

```

Login.php

```

<?php
session_start();
if(isset($_SESSION['admin_sid']) || isset($_SESSION['customer_sid']))
{

```

```
header("location:index.php");
}
else{
?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">

<meta name="viewport" content="width=device-width, initial-scale=1, maximum-
scale=1.0, user-scalable=no">

<meta http-equiv="X-UA-Compatible" content="IE=edge">

<meta name="msapplication-tap-highlight" content="no">

<title>Login</title>

<!-- Favicons-->

<link rel="icon" href="images/favicon/favicon-32x32.png" sizes="32x32">

<!-- Favicons-->

<link rel="apple-touch-icon-precomposed" href="images/favicon/apple-touch-icon-
152x152.png">

<!-- For iPhone -->

<meta name="msapplication-TileColor" content="#00bcd4">

<meta name="msapplication-TileImage" content="images/favicon/mstile-
144x144.png">

<!-- For Windows Phone -->

<!-- CORE CSS-->
```

```
<link href="css/materialize.min.css" type="text/css" rel="stylesheet"
media="screen,projection">
```

```
<link href="css/style.min.css" type="text/css" rel="stylesheet"
media="screen,projection">
```

```
<!-- Custome CSS-->
```

```
<link href="css/custom/custom.min.css" type="text/css" rel="stylesheet"
media="screen,projection">
```

```
<link href="css/layouts/page-center.css" type="text/css" rel="stylesheet"
media="screen,projection">
```

```
<!-- INCLUDED PLUGIN CSS ON THIS PAGE -->
```

```
<link href="js/plugins/perfect-scrollbar/perfect-scrollbar.css" type="text/css"
rel="stylesheet" media="screen,projection">
```

```
</head>
```

```
<body class="cyan">
```

```
<!-- Start Page Loading -->
```

```
<div id="loader-wrapper">
```

```
<div id="loader"></div>
```

```
<div class="loader-section section-left"></div>
```

```
<div class="loader-section section-right"></div>
```

```
</div>
```

```
<!-- End Page Loading -->
```

```
<div id="login-page" class="row">
```

```

<div class="col s12 z-depth-4 card-panel">
<form method="post" action="routers/router.php" class="login-form" id="form">
<div class="row">
<div class="input-field col s12 center">
<p class="center login-form-text">Login for Food Ordering System</p>
</div>
</div>
<div class="row margin">
<div class="input-field col s12">
<i class="mdi-social-person-outline prefix"></i>
<input name="username" id="username" type="text">
<label for="username" class="center-align">Username</label>
</div>
</div>
<div class="row margin">
<div class="input-field col s12">
<i class="mdi-action-lock-outline prefix"></i>
<input name="password" id="password" type="password">
<label for="password">Password</label>
</div>
</div>
<div class="row">
<a href="javascript:void(0);" onclick="document.getElementById('form').submit();"
class="btn waves-effect waves-light col s12">Login</a>
</div>
<div class="row">
<div class="input-field col s6 m6 l6">

```

<p class="margin medium-small">Register Now!</p>

</div>

</div>

</div>

</form>

</div>

</div>

<!-- =====

Scripts

===== -->

<!-- jQuery Library -->

<script type="text/javascript" src="js/plugins/jquery-1.11.2.min.js"></script>

<!--materialize js-->

<script type="text/javascript" src="js/materialize.min.js"></script>

<!--scrollbar-->

<script type="text/javascript" src="js/plugins/perfect-scrollbar/perfect-scrollbar.min.js"></script>

<!--plugins.js - Some Specific JS codes for Plugin Settings-->

<script type="text/javascript" src="js/plugins.min.js"></script>

<!--custom-script.js - Add your own theme custom JS-->

```
<script type="text/javascript" src="js/custom-script.js"></script>
```

```
</body>
```

```
</html>
```

```
<?php
```

```
}
```

```
?>
```

```
Admin_page.php,
```

```
<?php
```

```
include 'includes/connect.php';
```

```
if($_SESSION['admin_sid']==session_id())
```

```
{
```

```
?>
```

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1, maximum-scale=1.0, user-scalable=no">
```

```
<meta http-equiv="X-UA-Compatible" content="IE=edge">
```

```
<meta name="msapplication-tap-highlight" content="no">
```

```
<title>Food Menu</title>
```

```
<!-- Favicons-->
```

```
<link rel="icon" href="images/favicon/favicon-32x32.png" sizes="32x32">
```

```
<!-- Favicons-->
```

```
<link rel="apple-touch-icon-precomposed" href="images/favicon/apple-touch-icon-152x152.png">
```

```
<!-- For iPhone -->
```

```
<meta name="msapplication-TileColor" content="#00bcd4">
```

```
<meta name="msapplication-TileImage" content="images/favicon/mstile-144x144.png">
```

```
<!-- For Windows Phone -->
```

```
<!-- CORE CSS-->
```

```
<link href="css/materialize.min.css" type="text/css" rel="stylesheet" media="screen,projection">
```

```
<link href="css/style.min.css" type="text/css" rel="stylesheet" media="screen,projection">
```

```
<!-- Custome CSS-->
```

```
<link href="css/custom/custom.min.css" type="text/css" rel="stylesheet" media="screen,projection">
```

```
<!-- INCLUDED PLUGIN CSS ON THIS PAGE -->
```

```
<link href="js/plugins/perfect-scrollbar/perfect-scrollbar.css" type="text/css" rel="stylesheet" media="screen,projection">
```

```
<link href="js/plugins/data-tables/css/jquery.dataTables.min.css" type="text/css" rel="stylesheet" media="screen,projection">
```

```
<style type="text/css">
```

```
.input-field div.error{
```

```
position: relative;
```

```
top: -1rem;
```

```

left: 0rem;

font-size: 0.8rem;

color:#FF4081;

-webkit-transform: translateY(0%);

-ms-transform: translateY(0%);

-o-transform: translateY(0%);

transform: translateY(0%);

}

.input-field label.active{

width:100%;

}

.left-alert input[type=text] + label:after,

.left-alert input[type=password] + label:after,

.left-alert input[type=email] + label:after,

.left-alert input[type=url] + label:after,

.left-alert input[type=time] + label:after,

.left-alert input[type=date] + label:after,

.left-alert input[type=datetime-local] + label:after,

.left-alert input[type=tel] + label:after,

.left-alert input[type=number] + label:after,

.left-alert input[type=search] + label:after,

.left-alert textarea.materialize-textarea + label:after{

left:0px;

}

.right-alert input[type=text] + label:after,

.right-alert input[type=password] + label:after,

.right-alert input[type=email] + label:after,

```

```

.right-alert input[type=url] + label:after,
.right-alert input[type=time] + label:after,
.right-alert input[type=date] + label:after,
.right-alert input[type=datetime-local] + label:after,
.right-alert input[type=tel] + label:after,
.right-alert input[type=number] + label:after,
.right-alert input[type=search] + label:after,
.right-alert textarea.materialize-textarea + label:after{
right:70px;
}
</style>
</head>

<body>
<!-- Start Page Loading -->
<div id="loader-wrapper">
<div id="loader"></div>
<div class="loader-section section-left"></div>
<div class="loader-section section-right"></div>
</div>
<!-- End Page Loading -->

<!-- //////////////////////////////////////// -->

<!-- START HEADER -->
<header id="header" class="page-topbar">
<!-- start header nav-->

```

```

<div class="navbar-fixed">

<nav class="navbar-color">

<div class="nav-wrapper">

<ul class="left">

<li><h1 class="logo-wrapper"><a href="index.php" class="brand-logo darken-1"></a> <span class="logo-text">Logo</span></h1></li>

</ul>

</div>

</nav>

</div>

<!-- end header nav-->

</header>

<!-- END HEADER -->

<!-- //////////////////////////////////////// -->

<!-- START MAIN -->

<div id="main">

<!-- START WRAPPER -->

<div class="wrapper">

<!-- START LEFT SIDEBAR NAV-->

<aside id="left-sidebar-nav">

<ul id="slide-out" class="side-nav fixed leftside-navigation">

<li class="user-details cyan darken-2">

<div class="row">

<div class="col col s4 m4 l4">

```


</div>

<div class="col col s8 m8 l8">

<ul id="profile-dropdown" class="dropdown-content">

<i class="mdi-hardware-keyboard-tab"></i>
Logout

</div>

<div class="col col s8 m8 l8">

<?php echo \$name;?> <i class="mdi-navigation-arrow-drop-down right"></i>

<p class="user-roal"><?php echo \$role;?></p>

</div>

</div>

<li class="bold active"><i class="mdi-editor-border-color"></i> Food Menu

<li class="no-padding">

<ul class="collapsible collapsible-accordion">

<li class="bold"><i class="mdi-editor-insert-invitation"></i> Orders

<div class="collapsible-body">

All Orders


```

<?php
$sql = mysqli_query($con, "SELECT DISTINCT status FROM orders;");
while($row = mysqli_fetch_array($sql)){
    echo '<li><a href="all-orders.php?status='.$row['status'].'">'.$row['status'].'</a>
    </li>';
}
?>

</ul>

</div>

</li>

</ul>

</li>

<li class="no-padding">
    <ul class="collapsible collapsible-accordion">
        <li class="bold"><a class="collapsible-header waves-effect waves-cyan"><i
class="mdi-action-question-answer"></i> Tickets</a>
        <div class="collapsible-body">
            <ul>
<li><a href="all-tickets.php">All Tickets</a>
            </li>
        </div>
    </li>
<?php
$sql = mysqli_query($con, "SELECT DISTINCT status FROM tickets;");
while($row = mysqli_fetch_array($sql)){
    echo '<li><a href="all-tickets.php?status='.$row['status'].'">'.$row['status'].'</a>
    </li>';
}
?>

```

```

</ul>

</div>

</li>

</ul>

</li>

<li class="bold"><a href="users.php" class="waves-effect waves-cyan"><i
class="mdi-social-person"></i> Users</a>

</li>

</ul>

<a href="#" data-activates="slide-out" class="sidebar-collapse btn-floating btn-
medium waves-effect waves-light hide-on-large-only cyan"><i class="mdi-navigation-
menu"></i></a>

</aside>

<!-- END LEFT SIDEBAR NAV-->

<!-- //////////////////////////////////////// -->

<!-- START CONTENT -->

<section id="content">

<!--breadcrumbs start-->

<div id="breadcrumbs-wrapper">

<div class="container">

<div class="row">

<div class="col s12 m12 l12">

<h5 class="breadcrumbs-title">Food Menu</h5>

</div>

</div>

```

</div>

</div>

<!--breadcrumbs end-->

<!--start container-->

<div class="container">

<p class="caption">Add, Edit or Remove Menu Items.</p>

<div class="divider"></div>

<form class="formValidate" id="formValidate" method="post" action="routers/menu-router.php" novalidate="novalidate">

<div class="row">

<div class="col s12 m4 l3">

<h4 class="header">Order Food</h4>

</div>

<div>

<table id="data-table-admin" class="responsive-table display" cellspacing="0">

<thead>

<tr>

<th>Name</th>

<th>Item Price/Piece</th>

<th>Available</th>

</tr>

</thead>

<tbody>

<?php

```

$result = mysqli_query($con, "SELECT * FROM items");
while($row = mysqli_fetch_array($result))
{
echo          '<tr><td><div          class="input-field          col          s12"><label
for="'. $row["id"].'_name">Name</label>';

echo          '<input          value="'. $row["name"].'"          id="'. $row["id"].'_name"
name="'. $row["id"].'_name"          type="text"          data-error="'.errorTxt'. $row["id"].'"><div
class="errorTxt'. $row["id"].'"></div></td>';

echo          '<td><div          class="input-field          col          s12          "><label
for="'. $row["id"].'_price">Price</label>';

echo '<input value="'. $row["price"].'" id="'. $row["id"].'_price" name="'. $row["id"].'_price"
type="text"          data-error="'.errorTxt'. $row["id"].'"><div
class="errorTxt'. $row["id"].'"></div></td>';

echo '<td>';

if($row['deleted'] == 0){
$text1 = 'selected';
$text2 = "";
}
else{
$text1 = "";
$text2 = 'selected';
}

echo '<select name="'. $row["id"].'_hide">
<option value="1". $text1.'>Available</option>
<option value="2". $text2.'>Not Available</option>
</select></td></tr>';
}
?>

</tbody>

```

```

</table>

</div>

<div class="input-field col s12">

  <button class="btn cyan waves-effect waves-light right" type="submit"
name="action">Modify

  <i class="mdi-content-send right"></i>

</button>

</div>

</div>

</form>

<form class="formValidate" id="formValidate1" method="post" action="routers/add-
item.php" novalidate="novalidate">

  <div class="row">

    <div class="col s12 m4 l3">

      <h4 class="header">Add Item</h4>

    </div>

    <div>

      <table>

        <thead>

          <tr>

            <th data-field="id">Name</th>

            <th data-field="name">Item Price/Piece</th>

          </tr>

        </thead>

        <tbody>

          <?php
echo '<tr><td><div class="input-field col s12"><label for="name">Name</label>';

```

```

echo '<input id="name" name="name" type="text" data-error=".errorTxt01"><div
class="errorTxt01"></div></td>';

echo '<td><div class="input-field col s12 "><label for="price" class="">Price</label>';

echo '<input id="price" name="price" type="text" data-error=".errorTxt02"><div
class="errorTxt02"></div></td>';

echo '<td></tr>';

?>

</tbody>

</table>

</div>

<div class="input-field col s12">

<button class="btn cyan waves-effect waves-light right" type="submit"
name="action">Add

<i class="mdi-content-send right"></i>

</button>

</div>

</div>

</form>

<div class="divider"></div>

</div>

</div>

</div>

<!--end container-->

</section>

<!-- END CONTENT -->

</div>

```

<!-- END WRAPPER -->

<!-- // -->

<!-- START FOOTER -->

<footer class="page-footer">

<div class="footer-copyright">

<div class="container">

Copyright © 2017 <a class="grey-text text-lighten-4" href="#"
target="_blank">Students All rights reserved.

 Design and Developed by <a class="grey-text text-lighten-4"
href="#">Students

</div>

</div>

</footer>

<!-- END FOOTER -->

<!-- =====

Scripts

===== -->

<!-- jQuery Library -->

```

<script type="text/javascript" src="js/plugins/jquery-1.11.2.min.js"></script>

<!--angularjs-->

<script type="text/javascript" src="js/plugins/angular.min.js"></script>

<!--materialize js-->

<script type="text/javascript" src="js/materialize.min.js"></script>

<!--scrollbar-->

<script      type="text/javascript"      src="js/plugins/perfect-scrollbar/perfect-
scrollbar.min.js"></script>

<!-- data-tables -->

<script      type="text/javascript"      src="js/plugins/data-
tables/js/jquery.dataTables.min.js"></script>

<script      type="text/javascript"      src="js/plugins/data-tables/data-tables-
script.js"></script>


<script      type="text/javascript"      src="js/plugins/jquery-
validation/jquery.validate.min.js"></script>

<script      type="text/javascript"      src="js/plugins/jquery-validation/additional-
methods.min.js"></script>


<!--plugins.js - Some Specific JS codes for Plugin Settings-->

<script type="text/javascript" src="js/plugins.min.js"></script>

<!--custom-script.js - Add your own theme custom JS-->

<script type="text/javascript" src="js/custom-script.js"></script>

<script type="text/javascript">

$("#formValidate").validate({
rules: {
<?php
$result = mysqli_query($con, "SELECT * FROM items");
while($row = mysqli_fetch_array($result))

```

```

{
echo $row["id"].'_name:{
required: true,
minlength: 5,
maxlength: 20
},';
echo $row["id"].'_price:{
required: true,
min: 0
},';
}
echo ',';
?>
messages: {
<?php
$result = mysqli_query($con, "SELECT * FROM items");
while($row = mysqli_fetch_array($result))
{
echo $row["id"].'_name:{
required: "Ener item name",
minlength: "Minimum length is 5 characters",
maxlength: "Maximum length is 20 characters"
},';
echo $row["id"].'_price:{
required: "Ener price of item",
min: "Minimum item price is Rs. 0"
},';

```

```

}
echo ',';
?>
errorElement : 'div',
errorPlacement: function(error, element) {
var placement = $(element).data('error');
if (placement) {
$(placement).append(error)
} else {
error.insertAfter(element);
}
}
});
</script>
<script type="text/javascript">
$("#formValidate1").validate({
rules: {
name: {
required: true,
minlength: 5
},
price: {
required: true,
min: 0
},
},
messages: {

```

```

name: {
  required: "Enter item name",
  minlength: "Minimum length is 5 characters"
},
price: {
  required: "Enter item price",
  minlength: "Minimum item price is Rs.0"
},
},
errorElement : 'div',
errorPlacement: function(error, element) {
  var placement = $(element).data('error');
  if (placement) {
    $(placement).append(error)
  } else {
    error.insertAfter(element);
  }
}
});
</script>
</body>

</html>
<?php
}
else
{

```


```

if($_SESSION['customer_sid']==session_id())
{
header("location:index.php");
}


else{
header("location:login.php");
}} ?>


```

SCREENSHOTS

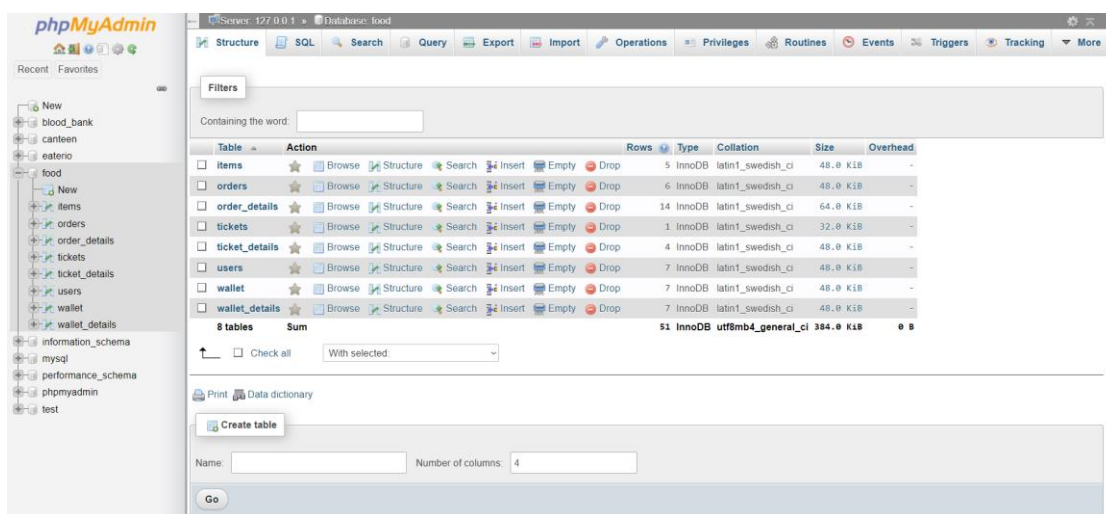


<http://localhost/Online-Food-Ordering-System-Project-in-PHP-master/register.php>

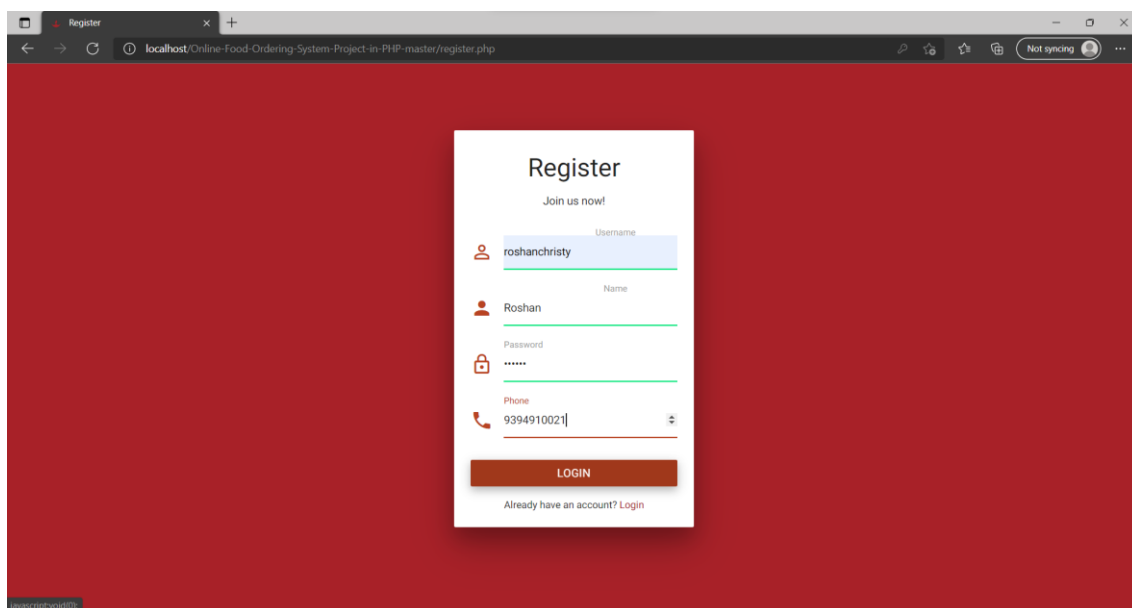

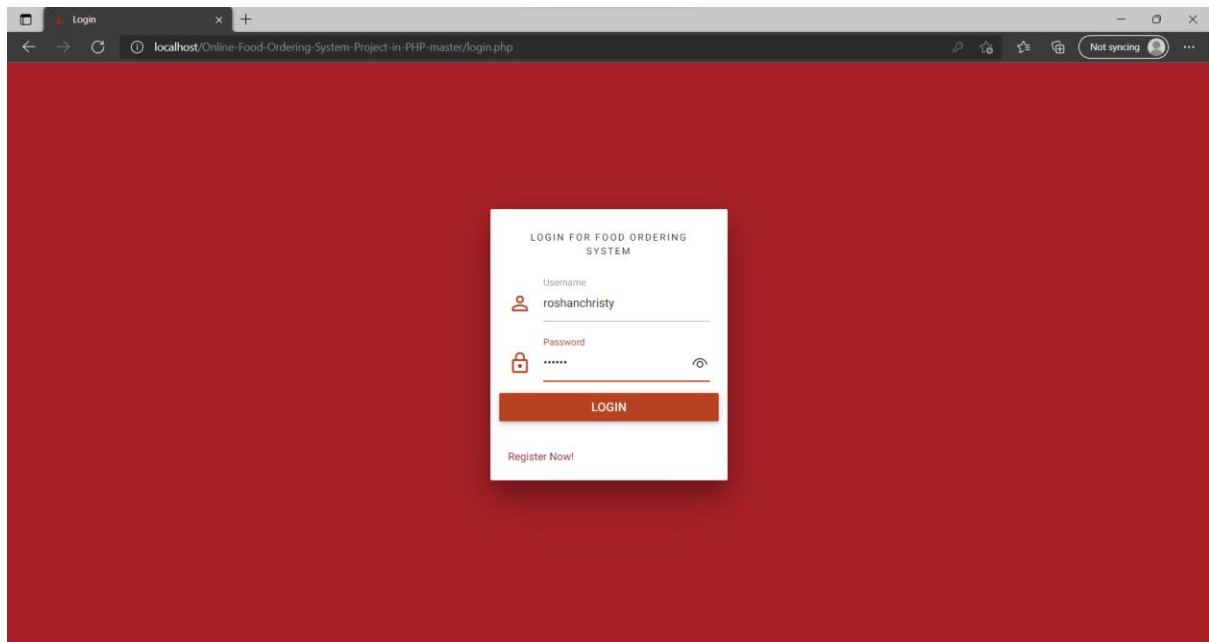

<http://localhost/Online-Food-Ordering-System-Project-in-PHP-master/index.php>

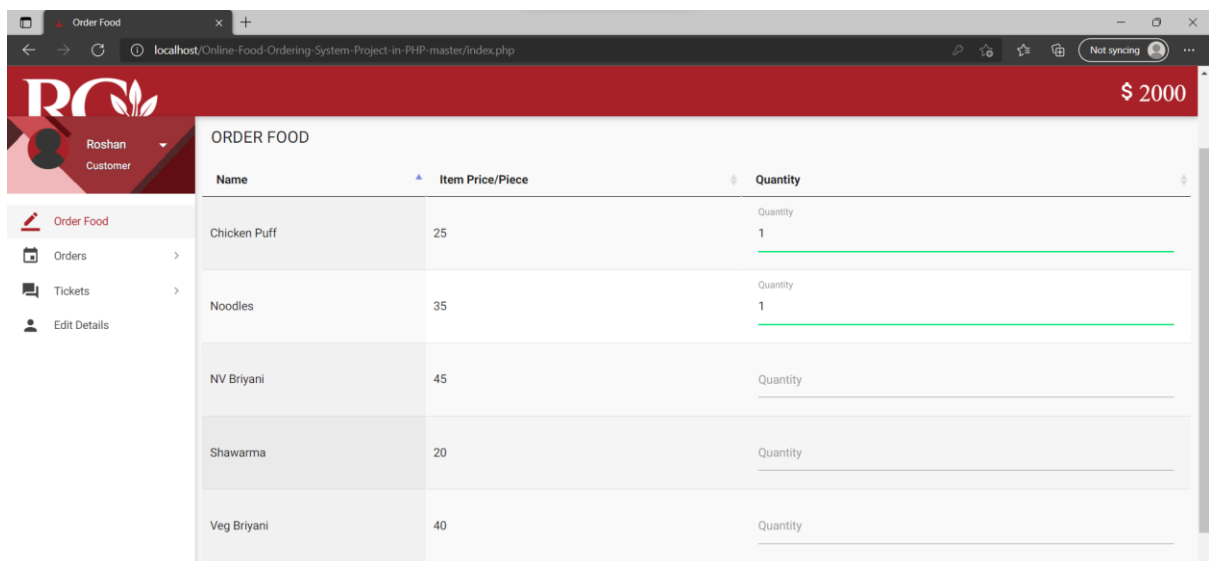

Roshan
Customer

Order Food

Orders
Tickets
Edit Details

| | | |
|-------------|----|---------------|
| Noodles | 35 | Quantity
1 |
| NV Briyani | 45 | Quantity |
| Shawarma | 20 | Quantity |
| Veg Briyani | 40 | Quantity |

Showing 1 to 5 of 5 entries

Any note(optional)

Deliver to : Sathyabama University Block18 second floor, near Girls Mess

ORDER >

Copyright © 2017 Students All rights reserved. Design and Developed by Students

Provide Order Details

localhost/Online-Food-Ordering-System-Project-in-PHP-master/place-order.php

Roshan
Customer

Order Food

Orders
Tickets
Edit Details

\$ 2000

Provide Order Details

Provide required delivery and payment details.

DETAILS

Payment Type

Wallet
Address
Nandhanam Chennai TN INDIA
Card Number
1234-5678-9123-3333
CVV Number
3-4-5

SUBMIT >

Estimated Receipt

Page 59 of 61

Provide Order Details

localhost/Online-Food-Ordering-System-Project-in-PHP-master/place-order.php

Not syncing

Roshan

Customer

Order Food

Orders

Tickets

Edit Details

1234-5678-9123-3333

CVV Number

3-4-5

SUBMIT

Estimated Receipt

Name: roshan

Contact Number: 9394910021

| | | |
|-----------------|----------|--------|
| #1 Chicken Puff | 1 Pieces | Rs. 25 |
| #4 Noodles | 1 Pieces | Rs. 35 |
| Total | | Rs. 60 |

Note: Deliver to : Sathyabama University Block18 second floor, near Girls Mess

Copyright © 2017 Students All rights reserved.

Design and Developed by Students

Edit Details

localhost/Online-Food-Ordering-System-Project-in-PHP-master/details.php

Not syncing

Roshan

Customer

Order Food

Orders

Tickets

Edit Details

DETAILS

Username

roshan

Name

roshan

Email

roshan@gmail.com

Password


Contact

9394910021

Address

Nandhanam Chennai TN INDIA

SUBMIT

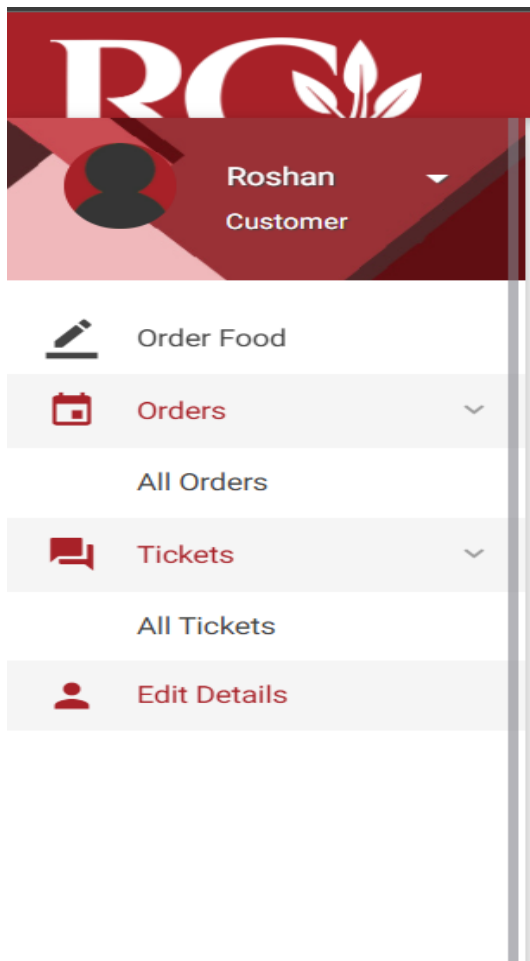

Hence The Order Is Placed And Is Delivered By An Exectuive To The Location Mentioned!

Further Improvisations Will Be Done As Mentioned Before Under “Future Work” Section.

THANK YOU.